



ALING  **MODE**



 **ALING-CONEL**

- Usaglašeno sa IEC 60669-1
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 60669-1
- Installation into the mounting frame by pressing

TASTERI SWITCH BUTTONS

Bela
White**x = 0**Antracit
Anthracite**x = A****6551**

Sklopka jednopolna
10AX 250V~ 1M
bez tastera
*1 pole switch
10AX 250V~ 1M
without button*

**6851**

Sklopka jednopolna
16AX 250V~ 1M
bez tastera
*1 pole switch
16AX 250V~ 1M
without button*

**6571**

Sklopka naizmenična
10AX 250V~ 1M
bez tastera
*Alternative switch
10AX 250V~ 1M
without button*

**689.x**

Taster sklopka jednopolna
10AX 250V~ 1M
*1 pole push-button switch
10AX 250V~ 1M*

**690.x**

Taster sklopka za roletne
10AX 250V~, 2M
*Push-button shutters switch
10AX 250V~, 2M*

- Par taster sklopki povezani za upravljanje kretanjem elektromotora za roletne u dva smjera
- A pair of connected push-button switches for the control of shutters electric motor movement in two directions

**6871**

Sklopka naizmenična
16AX 250V~ 1M
bez tastera
*Alternative switch
16AX 250V~ 1M
without button*

**6751**

Sklopka jednopolna
indikatorska
10AX 250V~ 1M bez tastera
*1 pole switch
with indication 10AX 250V~ 1M
without button*

**6691**

Sklopka jednopolna indikatorska
16AX 250V~ 1M bez tastera
*1 pole switch
with indication 16AX 250V~ 1M
without button*

**685.x**

Sklopka jednopolna
16AX 250V~ 1M
*1 pole switch
16AX 250V~ 1M*

**669.x**

Sklopka jednopolna
sa indikacijom 16AX 250V~ 1M
*1 pole switch with indication
16AX 250V~ 1M*

**687.x**


Sklopka naizmenična
16AX 250V~ 1M
*2 way switch
16AX 250V~ 1M*

**655.x**

Sklopka jednopolna
10AX 250V~ 1M
*1 pole switch
10AX 250V~ 1M*

**657.x**

Sklopka
naizmenična
10AX 250V~ 1M
*2 way switch
10AX 250V~ 1M*

**658.x**

Sklopka ukrnsa
10AX 250V~ 2M
*Intermediate
switch
10AX 250V~ 2M*

**6692.x**

Sklopka jednopolna
indikatorska 16AX 250V~ 1M
*1 pole switch with indication
16AX 250V~ 1M*

**688.x**

Sklopka ukrnsa
16AX 250V~, 2M
*Intermediate switch
16AX 250V~, 2M*

**670.x**

Sklopka naizmenična
sa indikacijom 16AX 250V~ 1M
*2 way switch with indication
16AX 250V~ 1M*

- Indikacija svetli kada je strujno kolo otvoreno
- Indication turns on when the circuit is open
- Za pokrivanje mesta gde nedostaje modul
- Covers the width of one module 22mm
- Ugradnja u noseću prirubnicu utiskivanjem
- Installation into the holding frame by pressing

**6552.x**

Sklopka jednopolna
10AX 250V~ 2M
*1 pole switch
10AX 250V~ 2M*

**6572.x**

Sklopka
naizmenična
10AX 250V~ 2M
*2 way switch
10AX 250V~ 2M*

**6554.x**

Sklopka dvopolna
10AX 250V~ 2M
*2 pole switch
10AX 250V~ 2M*


**671.x**

Sklopka ukrnsa
sa indikacijom 16AX 250V~, 2M
*Intermediate switch with
indication 16AX 250V~, 2M*

**6500.x**

Poklopac maske 1M
(slepi modul)
Blank module 1M

- Za pokrivanje mesta gde nedostaje modul
- Pokriva širinu jednog modula 22mm
- Ugradnja u noseću prirubnicu utiskivanjem
- Installation into the holding frame by pressing

**675.x**

Sklopka jednopolna
sa indikacijom 10AX 250V~ 1M
*1 pole switch with indication
10AX 250V~ 1M*

**6752.x**


Sklopka jednopolna
sa indikacijom 10AX 250V~ 1M
*1 pole switch with indication
10AX 250V~ 1M*

**677.x**

Sklopka naizmenična
sa indikacijom 10AX 250V~ 1M
*2 way switch with indication
10AX 250V~ 1M*

**6541.x**

Taster 1M
za sklopke
bez indikacije
*Button 1M for
switches without
indication*

**6581.x**

Taster 2M
za sklopke
bez indikacije
*Button 2M for
switches without
indication*

1M	65411.x	65412.x	65413.x	65414.x	65415.x	65416.x
2M sa oznakom with symbol	65811.x strelica gore arrow up	65812.x strelica dole arrow down	65813.x pojačavanja amplification	65814.x ključa key	65815.x 0-I 0-I	65816.x posluge servants

**678.x**

Sklopka ukrnsa
sa indikacijom 10AX 250V~, 2M
*Intermediate switch with
indication 10AX 250V~, 2M*

**659.x**

Taster sklopka za svjetlo
10AX 250V~ 1M
*Light push-button switch
10AX 250V~ 1M*

**6590.x**

Taster sklopka za svjetlo
10AX 250V~ 2M
*Light push-button
switch 10AX 250V~ 2M*

**6542.x**

Taster 1M
za sklopke
sa indikacijom
*Button 1M for
switches with
indication*

**6582.x**

Taster 2M
za sklopke
sa indikacijom
*Button 2M for
switches with
indication*

1M	65421.x	65422.x	65423.x	65424.x	65425.x	65426.x	65427.x	65428.x
2M sa oznakom with symbol	65821.x svjetla light	65822.x zvona bell	65823.x bojlera boiler	65824.x grejalice heater	65825.x ventilatora fan	65826.x priključnice socket	65827.x veš mašine washing machine	65828.x tuša shower

**6591.x**

Taster sklopka za svjetlo
sa indikacijom 10AX 250V~ 1M
*Light push-button switch
with indication 10AX 250V~ 1M*

**65901.x**

Taster sklopka za svjetlo
sa indikacijom 10AX 250V~ 2M
*Light push-button switch
with indication 10AX 250V~ 2M*

**660.x**

T

- Usaglašeno sa IEC 60669-1
- Ugradnja u noseču prirubnicu utiskivanjem
- Indikacija



667.x
Elektronski regulator
40-300VA 1M
Dimmer rotative 40-300VA 1M



6671.x
Elektronski regulator
sa naizmjeničnom sklopkom 40-300VA 1M
Dimmer with alternative switch 40-300VA 1M



6681.x
Elektronski regulator
sa rotacionom sklopkom,
800W 1M
Dimmer with rotary switch, 800W 1M



6674.x
Elektronski regulator
za LED 200W 1M
Dimmer for LED 200W 1M



6673.x
Infracrveni detektor
pokreta 500W,
230V~/50Hz 2M
Infrared motion detector 500W, 230V~/50Hz 2M

- Reljni izlaz max 500W za sve tipove sijalica;
- Regulacija vremena isključenosti 10 s - 10 min;
- Regulacija osvetljenosti pri kojoj senzor reaguje 2 - 2000 lx;
- Regulacija svetlosti;
- Mogućnost aktiviranja spoljnjim tasterom;
- Vidni ugao po horizontali 110°
- Relay exit max 500W for all lamps;
- Time regulation 10 s - 10 min;
- Light threshold regulation 2 - 2000 lx;
- Sensitivity lever regulation;
- External push button activation;
- Horizontal view angle 110°



6911.x
Elektronski regulator za kontrolu
svetlosti 40-200W, 1M, sa daljinskim
upravljanjem ZigBee
Dimmer 40-200W, 1M, remote controlled ZigBee

HOTELSKI PROGRAM / HOTEL PROGRAM



6960.x
RM.CHA.01
Držać RFID kartica
RFID card holder

- Predefinisana funkcionalnost držaća RFID kartica u hotelskim sobama
- Programabilnost uređaja omogućava dodavanje novih i izmenu postojećih funkcionalnosti
- Podržava MIFARE® 1K RFID kartice
- LED osvjetljenje procepa za ubacivanje kartice
- Komunikacija sa ostatom sistema preko Modbus RTU ili BACnet MS/TP komunikacionih protokola
- Predefined functionality for hotel room access panel
- Device programmability enables adding of new and changing of existing functionalities
- Support for MIFARE® 1K RFID cards
- LED light for marking card insertion slot
- The device communicates with the resto of the system using either Modbus RTU or BACnet MS/TP protocol



6962.x
RM.RDA.01
Sobna kontrolna jedinica
Remote Display Unit

- Predefined functionality – control of temperature set point and fan speed of air-condition unit, activation of do not disturb, SOS and clean my room signals.
- Device programmability enables adding of new and changing of existing functionalities with 7 pushbuttons
- 1.8" TFT display with backlight
- The device communicates with the resto of the system using either Modbus RTU or BACnet MS/TP protocol



6961.x
RM.CRA.01
Čitač RFID kartica
RFID Card Reader

- Predefinirana funkcionalnost panela za pristup hotelskoj sobi
- Programabilnost uređaja omogućava dodavanje novih i izmenu postojećih funkcionalnosti
- Podržava MIFARE® 1K RFID kartice
- Taster za aktiviranje zvana
- 4 LED indikatora sa predefinisanim funkcionalnošću prikaza informacija: zauzeotost sobe, ne uzemirajav, SOS i zahteva za čišćenje sobe.
- Komunikacija sa ostatom sistema preko Modbus RTU ili BACnet MS/TP komunikacionih protokola
- Predefined functionality for hotel room access panel
- Device programmability enables adding of new and changing of existing functionalities
- Support for MIFARE® 1K RFID cards
- Doorbell push button
- 4 LED indicators showing information about room occupancy status, do not disturb, SOS and clean my room
- The device communicates with the resto of the system using either Modbus RTU or BACnet MS/TP protocol



6963.x
RM.KPA.01
Sobna kontrolna jedinica
Room Keypad

- Predefinirana funkcionalnost – kontrola zadate temperature i brzine ventilatora klima uređaja, aktiviranje DND (ne ometaj) i SOS signala kao i poziv osoblu
- Programabilnost uređaja omogućava dodavanje novih i izmenu postojećih funkcionalnosti
- Do 12 tastera
- Komunikacija sa ostatom sistema preko Modbus RTU ili BACnet MS/TP komunikacionih protokola
- Predefined functionality – light control
- Device programmability enables adding of new and changing of existing functionalities
- Up to 12 pushbuttons
- The device communicates with the resto of the system using either Modbus RTU or BACnet MS/TP protocol

PRIKLJUČNICE SOCKET OUTLETS



651.x
Priključnica dvopolna 16A
250V~ 2M
2 pole socket outlet 16A 250V~ 2M



651.4
crveni blok
red block

- Za mreže sa UPS (sa transformatorom)
- For power networks with UPS (with transformer)



651.12
zeleni blok
green block

- Za mreže sa zaštićenim generatorskim napajanjem
- For power networks with protected generator supply via transformer



651.N
narandžasti blok
orange block

- Za mreže sa generatorskim napajanjem preko transformatora

Bela White
 Antracit Anthracite

x = 0

Bela White
 Antracit Anthracite


x = A




653.xx
Priključnica dvopolna sa poklopcom
16A 250V~ 2M
2 pole socket outlet with cover 16A 250V~ 2M



653.xT
Priključnica dvopolna sa transparentnim poklopcom 16A
250V~ 2M
2 pole socket outlet with transparent cover 16A 250V~ 2M

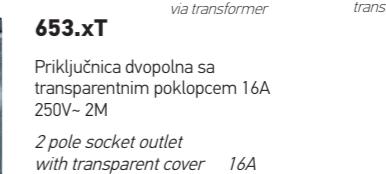

66512.x
Sklop dve priključnice dvopolne
16A 250V~ 2x2M premoštene
Sockets set 16A 250V~ 2x2M bridged

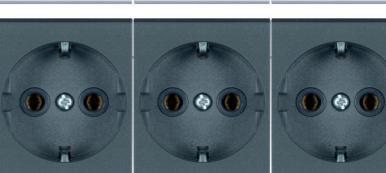

66513.x
Sklop tri priključnice dvopolne
16A 250V~ 3x2M premoštene
Sockets set 16A 250V~ 3x2M bridged



652.x
Priključnica dvopolna
CEI 23-50/P11 italijanska
10A 250V~ 1M
2 pole socket outlet CEI 23-50/P11 italian type, 10A 250V~ 1M

- Usaglašeno sa CEI 23-50/P11;
- Ugradnja u noseču prirubnicu utiskivanjem
- Complied with CEI 23-50/P11;
- Installation into the mounting frame by pressing



654.x
Priključnica dvopolna 16A
250V~ 2M
2 pole socket outlet 16A 250V~ 2M

654.4
crveni blok
red block



654.12
zeleni blok
green block

654.N
narandžasti blok
orange block



6540.x
Priključnica dvopolna 16A
250V~ 2M
2 pole socket outlet 16A 250V~ 2M

6540.4
crveni blok
red block



6540.12
zeleni blok
green block


6540.N
narandžasti blok
orange block



6519.x
Keystone nosač 1M
Keystone holder 1M



65190.x
ELine nosač 1M
ELine holder 1M



65190.x
Modul širine 22,2mm
za nošenje Keystone ili ELine konektora
Module 22,2mm width for Keystone or ELine connectors holding

• Complied with IEC 60603-7;
• Installation into the mounting frame by pressing



661.x
Priključnica telefonska
RJ12 6/2 1M
Telephone socket RJ12 6/2 1M



663.x
Priključnica telefonska
RJ12 6/4 1M
Telephone socket RJ12 6/4 1M



6631.x
Priključnica telefonska
Keystone RJ12 6/ Cat 3 1M
Telephone socket Keystone RJ12 6/ Cat 3 1M

• ISDN / Toolless


Montažna kutija
Installation box

 Prirubnica
Mounting frame

 Primer ugradnje
Installation example

 Dekorativna maska
Decorative frame


711



6533



6533



6533




6533



6534



6525




6537



700

710



700

710

