
protecta

IP55

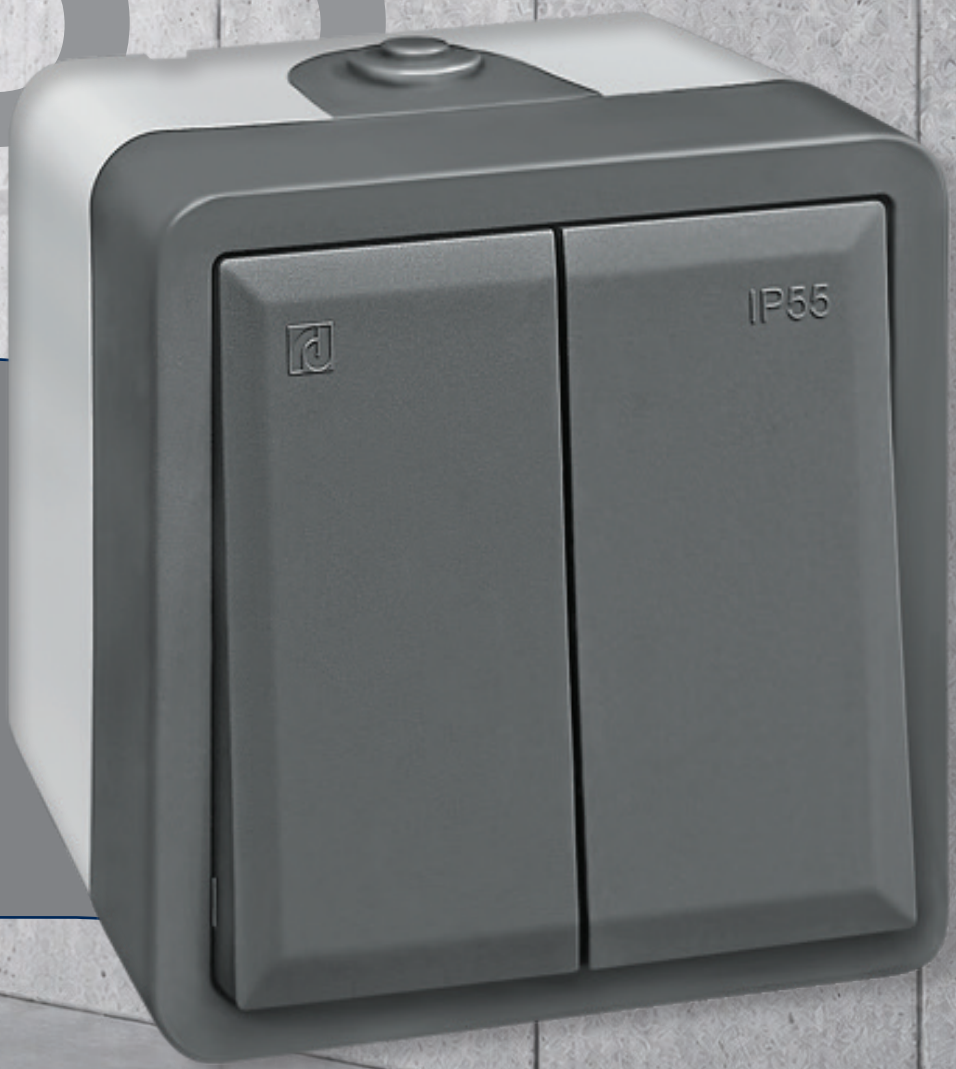

IP 55

Otporan na vodu i prašinu
Dust and water resistant

Visoka izdržljivost
High Durability

Jednostavna montaža
Easy Installation

ALING-CONEL



SKLOPKE
SWITCHES

- Stepen zaštite IP 55
- Usaglašeno sa IEC 60884-1
- Ugradnja na zid pomoću vijaka do Ø4 mm

- *Protection level IP 55*
- *Complied with IEC 60884-1*
- *Wall mounting by screws dia. to 4 mm*

PREDNOSTI / ADVANTAGES

Omogućena je maksimalna funkcionalnost proizvoda. Sklopke i priključnice se izradjuju od visokokvalitetnih materijala, savremenim tehnološkim postupcima.

Akcenat se stavlja na ergonomski dizajn koji omogućava bezbednu i jednostavnu montažu uz vrhunske estetske vrednosti.

Znatno je olakšano rukovanje prilikom montaže. Sklop mehanizma se postavlja na oslonce u kutiji pri čemu se zakopča zakačkama, što sprečava ispadanje iz kutije i olakšava dalji rad. Sklop bloka se jednostavnim utiskavanjem kači na kutiju i obezbeđuje čvrstu vezu.

Obezbeđen je visok stepen zaštite IP55 upotrebom zaptivnih elemenata koji sprečavaju prodiranje negativnih spoljašnjih uticaja u unutrašnjost proizvoda.


The maximum functionality of the product is provided. Switches and socket outlets are made of high-quality materials, using modern technologies.

Ergonomic design prioritizes safe and simple mounting with the highest aesthetic values.

Handling during the mounting process is significantly simplified. The mechanism is placed on supports in the box, and it is buckled up with hooks, which secure the mechanism from dropping out of the box and make further work much easier. The block assembly is placed on the box with simple pressing and secures a strong connection.

A high level of protection IP55 is achieved by using gaskets to prevent ingress of negative external factors inside of the product.

Zaštita IP55 se postiže korišćenjem zaptivnih elemenata koji sprečavaju prodiranje negativnih spoljašnjih faktora u unutrašnjost proizvoda.

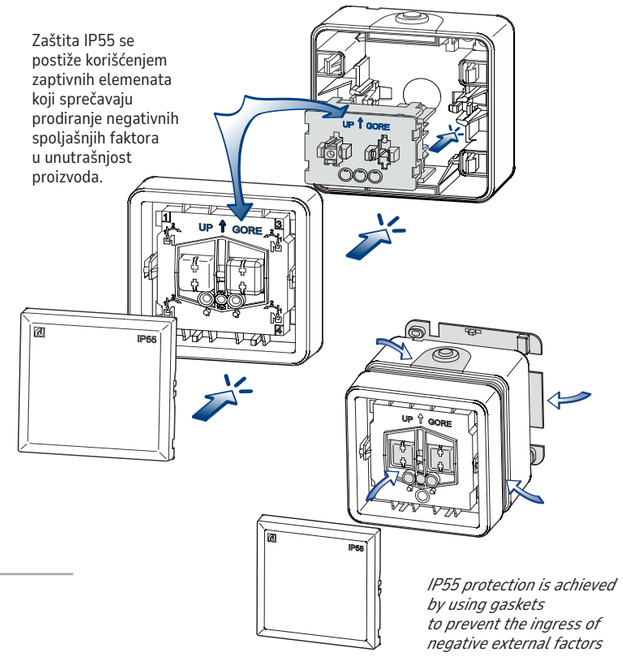

IP55 protection is achieved by using gaskets to prevent the ingress of negative external factors inside of the product.



22501.A1

Sklopka jednopolna
10AX/250V~

Single-pole switch 10AX/250V~



22505.A1

Taster sklopka za svetlo
10A/250V~

Light push-button switch 10A/250V~



22502.A1

Sklopka serijska
10AX/250V~

Serial switch 10AX/250V~



22515.A1

Taster sklopka za svetlo sa indikacijom
10A/250V~

Light push-button switch with indication 10A/250V~

- Indikacija svetli kada je sklopka isključena
- *Indication is on when the switch is off*



22507.A1

Taster sklopka za roletne
10A/250V~

Rolling shutter push-button switch 10A/250V~

- Dve taster sklopke za direktno pokretanje elektromotora za podizanje i spuštanje roletni,
- Blokada koja sprečava istovremeno kretanje u oba smera

- *Two push-button switches for direct activation of rolling shutters lifting and lowering electric motor*
- *Locking of movement switching-in possibilities simultaneously in both directions*



22503.A1

Sklopka naizmenična
10AX/250V~

Two-way switch 10AX/250V~



22506.A1

Taster sklopka za zvono
10A/250V~

Bell push-button switch 10A/250V~



22511.A1

Sklopka jednopolna sa indikacijom
10AX/250V~

Single-pole switch with indication 10AX/250V~

- Indikacija svetli kada je sklopka isključena
- *Indication is on when the switch is off*



22513.A1

Sklopka naizmenična sa indikacijom
10AX/250V~

Two-way switch with indication 10AX/250V~

- Indikacija svetli kada je strujno kolo otvoreno
- *Indication is on when the circut is open*



22504.A1

Sklopka ukrsna
10AX/250V~

Intermediate switch 10AX/250V~



22516.A1

Taster sklopka za zvono sa indikacijom
10A/250V~

Bell push-button switch with indication 10A/250V~

- Indikacija svetli kada je sklopka isključena
- *Indication is on when the switch is off*



22512.A1

Sklopka serijska sa indikacijom
10AX/250V~

Serial switch with indication 10AX/250V~

- Indikacija svetli kada je sklopka isključena
- *Indication is on when the switch is off*




22514.A1

Sklopka ukrsna sa indikacijom
10AX/250V~


Intermediate switch with indication 10AX/250V~

- Indikacija svetli kada je strujno kolo otvoreno
- *Indication is on when the circut is open*

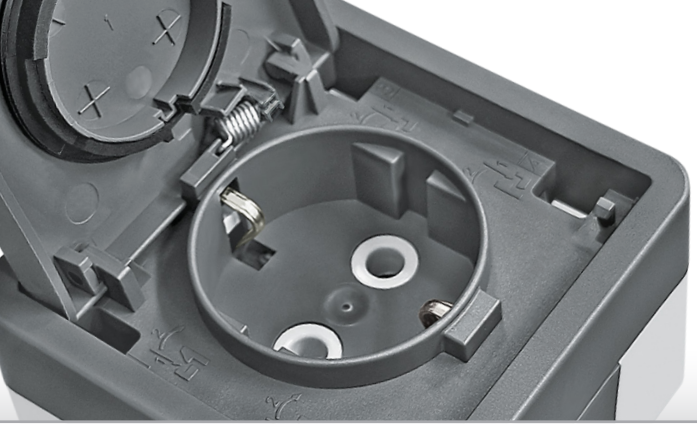

protecta

PRIKLJUČNICE
SOCKET OUTLETS





22401.A1

Priključnica dvopolna 16A/250V~

Double-pole socket outlet 16A/250V~

22405.A1

Francuski standard

French standard

U slučaju prodiranja vode ili kondenzovanja vlage u unutrašnjosti, potrebno je izvijačem snažno pritisnuti oslabljena mesta na dnu kutije, da bi se napravio otvor za isticanje.

If water ingress, or moisture condensation occurs, the marked spots on the bottom of the box must be strongly pressed with a screwdriver to provide a hole for discharge.



22421.A1

Priključnica dvopolna dvostruka 16A/250V~ horizontalna

Twofold double-pole socket outlet 16A/250V~ horizontal

22421P.A1

Premoštena

With bridged contacts

22425.A1

Francuski standard

French standard

- Usaglašeno sa NF C 61-314
- *Complied with NF C 61-314*

22425P.A1

Francuski standard

French standard



22431.A1

Priključnica dvopolna dvostruka 16A/250V~ vertikalna

Twofold double-pole socket outlet 16A/250V~ vertical

22431P.A1

Premoštena

With bridged contacts

22435.A1


Francuski standard

French standard

22435P.A1

Francuski standard

French standard

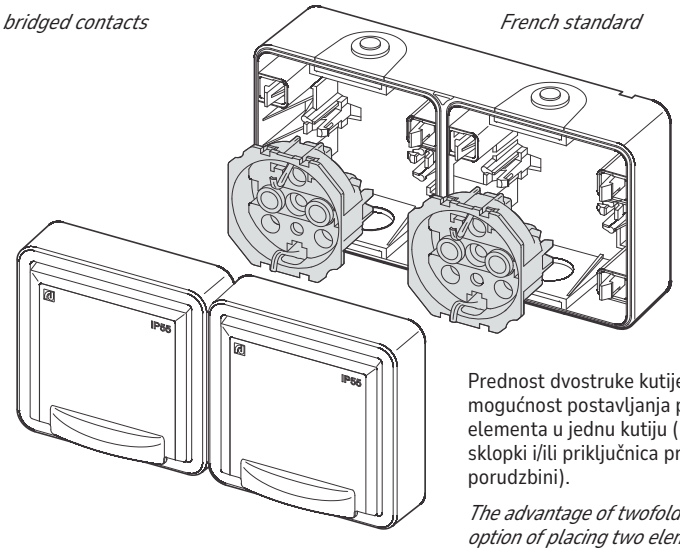

Prednost dvostruke kutije je mogućnost postavljanja po dva elementa u jednu kutiju (kombinacija sklopki i/ili priključnica proizvode se po porudzbini).

The advantage of twofold box is the option of placing two elements in the same box (combinations of switches and/or sockets are made on demand).

ALING-CONEL

a: Železnička 10, 21432 Gajdobra, Serbia
t: +381 21 762 674, 762 586
e: sales@aling-conel.com

www.aling-conel.com