



experience

ISKUSTVO U KOJE VERUJETE


experience

YOU TRUST



Od 1984. kvalitet i pouzdanost su glavni prioriteti u kompaniji Aling-Conel. To se podjednako odnosi na proizvode i usluge. Dugogodišnje iskustvo i brojna priznanja omogućila su nam da postanemo regionalni lider i pouzdan partner našim kupcima.

*Since 1984, quality and reliability are the top priorities of the company Aling-Conel. This applies equally to products and services. Many years of experience and numerous awards have enabled us to become a regional leader and reliable partner to our customers.*

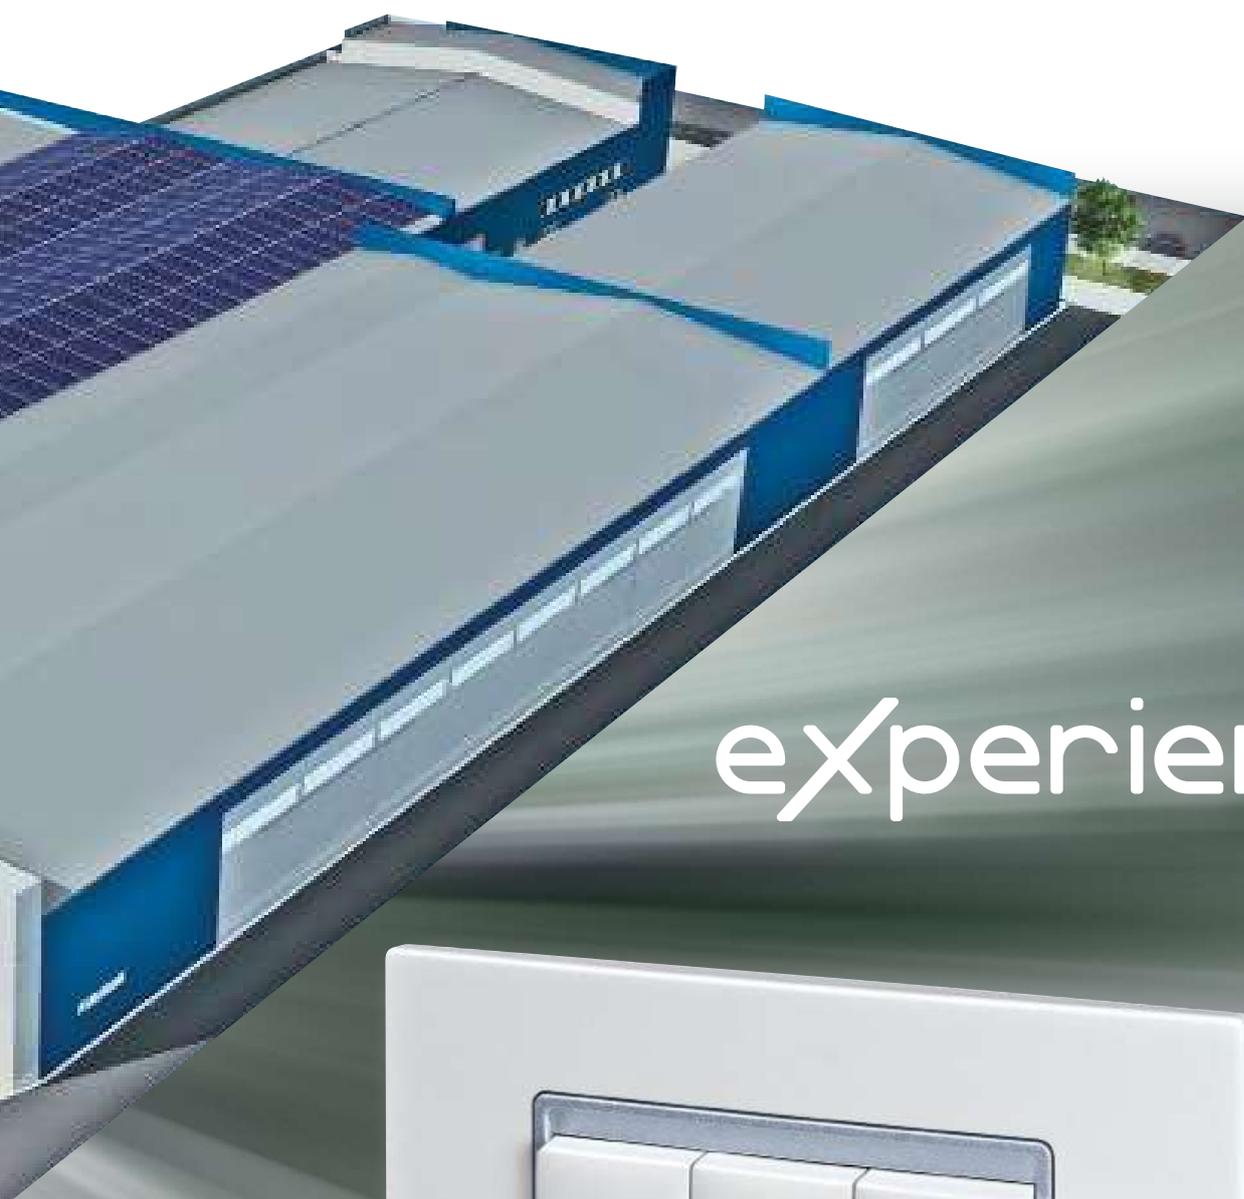

experience



DIZAJN OBLIKUJE NAŠ SVET  
**experience**  
DESIGN SHAPES OUR WORLD



Dizajnirani da zadovolje najviše sigurnosne standarde i proizvedeni od najkvalitetnijih materijala, Experience proizvodi nude mogućnost izražavanja osobenog stila korisnika u svom domu.

Ultimativna elegancija ogleda se u geometriji oblika, a smele kombinacije boja svakom zidu daće dozu ekstravagancije.


Modularni elementi izrađuju se u 4 boje

*Designed to meet the highest safety standards and manufactured from the finest materials, Experience products offer the opportunity to express personal style of every customer.*

*The ultimate elegance is reflected in the geometry of shapes and daring color combinations will give to any wall a dose of extravagance.*

*Modular elements are done in 4 colors*

**VRLO IZRAŽAJAN - VEOMA IMPRESIVAN - NEŽAN NA DODIR**  
**VERY EXPRESSIVE - VERY IMPRESSIVE - A GENTLE TOUCH**

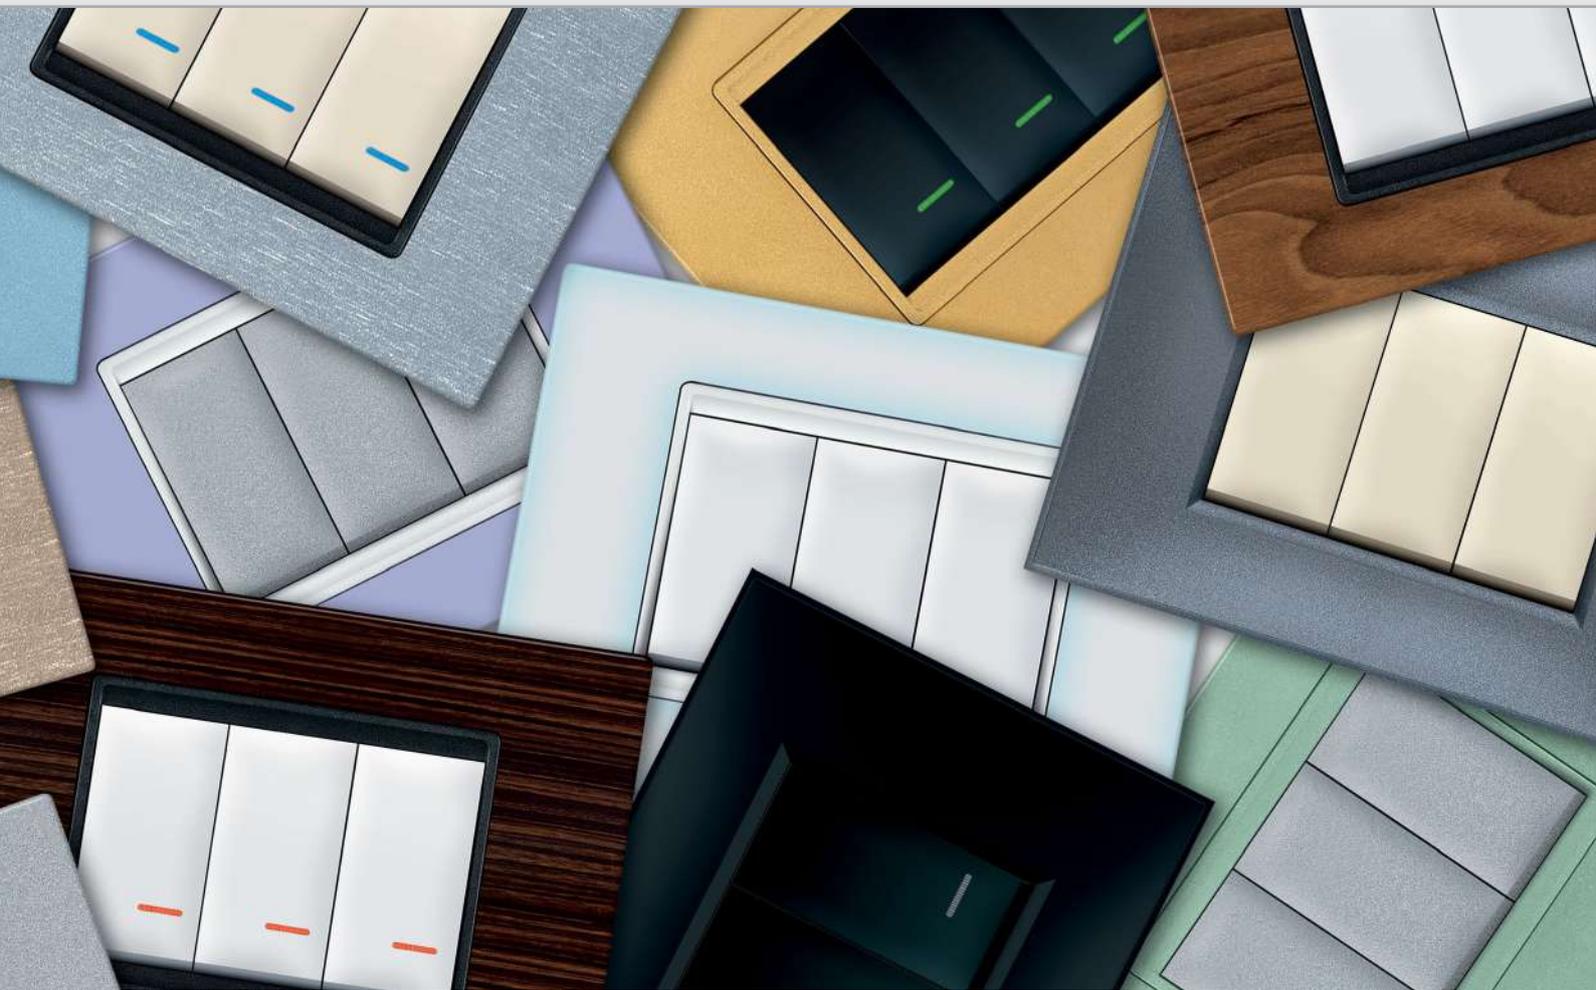

Bela  
*White*



Crna soft  
*Soft black*



Silver  
*Silver*



Krem  
*Beige*

TEHNIČKE PREDNOSTI

experience

TECHNICAL ADVANTAGES

## ○ UNIVERZALNA INSTALACIJA

Ugradnja u montažne kutije Ø60 uz pomoć vijaka ili stegača. Mogućnost nizanja kutija. Program Experience se na ovaj način može ugrađivati kod adaptacije postojećih instalacija bez ugradnje novih montažnih kutija.

## UNIVERSAL INSTALLATION


*Installation into the mounting box Ø60 with screws or screw clamps. The possibility of installation of mounting frames in row. Program Experience in this way can be installed in adaptation of existing installations without installing of new prefabricated mounting boxes.*

## □ MODULARNA INSTALACIJA

Za sklopove 3 ili više modula obezbeđene su posebne montažne kutije na koje se pribornica montira pomoću vijaka. Vijci se isporučuju zajedno sa pribornicom. Montažne kutije mogu biti za pune i za šuplje zidove.

## MODULAR INSTALLATION

*For the assembly of 3 or more modules we are providing special mounting boxes where mounting frame is installing by screws. Screws are supplied together with the mounting frame. Mounting boxes are made for full and hollow walls.*

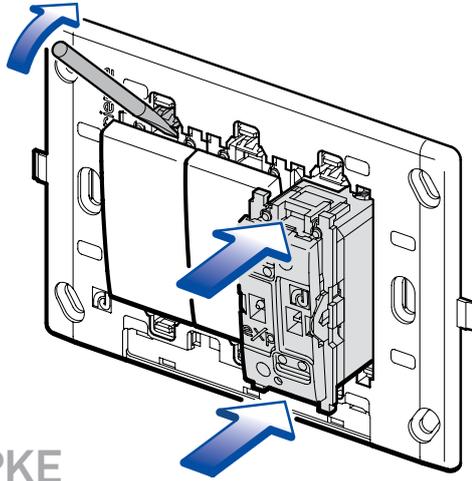

## SKLOPKE

Experience sklopke su jasno označene i sigurne za povezivanje zahvaljujući šemi koja se nalazi sa strane sklopke (smanjen je rizik od pogrešne instalacije).

U prirubnicu se postavljaju ručnim utiskivanjem sa prednje strane, bez skidanja prirubnice sa montažne kutije. Demontaža sklopke se takođe vrši sa prednje strane bez skidanja prirubnice sa montažne kutije. Dovoljno je izvijačem otkačiti modul sklopke.

Sklopke imaju jednostavne vijčane priključke koji omogućavaju sigurnu i brzu montažu. Opremljeni su ulaznim otvorima za lakše uvođenje provodnika. Prihvataju dva provodnika preseka do 4mm<sup>2</sup>. Vijci su obezbedeni od ispadanja.

LED indikacije za sklopke (za indikaciju kada je sklopka uključena ili isključena) postoje u dve varijante: sa kontaktima i sa provodnicima. Korisniku je data mogućnost izbora boje indikacije (crvena, plava, zelena, bela).



## SWITCHES

*Experience switches are clearly marked and safe for connectivity thanks to the scheme, which is located on the side of the switch (reduced risk of incorrect installation).*

*Installing the module switch into the mounting frame is simply done by hand pressing from the front side, without removing the mounting frame from the mounting box. Disassembly is also done from the front side without removing the mounting frame from the mounting box. It is only needed to remove module by screwdriver.*

*Switches have simple screw connectors that allow safe and fast installation. Switches have inlets for easier implementation of conductors. Inlets can wire two conductors up to 4mm<sup>2</sup>. The screws are secured from falling out.*

*LED lamp for switches (for indication when the switch is ON or OFF) are offered in two types: with contacts and with conductors. Customer can choose the color of light (red, blue, green, white).*



## PRIKLJUČNICE


Experience priključnice odgovaraju strogim standardima i sigurnosnim proverama. Priključnice su snabdene vijčanim priključcima sa ulazima za lakše uvođenje dva provodnika preseka do 2,5mm<sup>2</sup>.

Priključnice se rade i u varijanti sa membranama koje obezbeđuju zaštitu za decu sprečavanjem umetanja predmeta u priključnicu.

Montaža i demontaža u prirubnicu se vrši na isti način kao i kod sklopki.

### Prednosti utičnica Experience:

- veoma jednostavna montaža i demontaža
- pritezanje provodnika se vrši sa prednje strane i moguće je i kada je priključnica utisnuta u prirubnicu (olakšava laku montažu kratkih provodnika, krutih provodnika, velikog broja provodnika u kutiji)

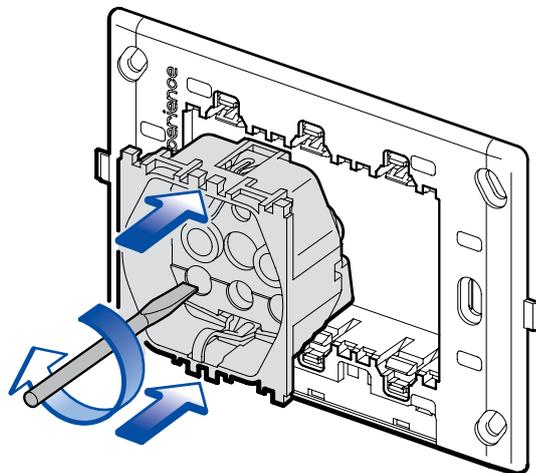

## SOCKET OUTLETS

*Experience socket outlets are complied with strict standards and safety checkouts. Socket outlets are supplied with screw connections with introductions to facilitate the introduction of two conductors up to 2.5mm<sup>2</sup>.*

*Sockets are made with membranes that provide protection for children by preventing insertion of objects into the socket outlet.*

*Installation and disassembly into the mounting frame is done the same way as for the switches.*

### Experience socket outlet advantages:

- user friendly assembly and dis-assembly
- tightening of the conductors is done from the front and is possible even when the socket outlet is inside the mounting frame (facilitates easy installation of short conductors, hard conductors, a large number of conductors in a mounting box)

## TEHNIČKE PREDNOSTI

# experience

## TECHNICAL ADVANTAGES

### REGULATORI

U prirodi najlepše svetlo pojavljuje se u suton. U kući, elektronski regulator vam pomaže da kreirate prijatan svetlosni ambijent u kome ćete se opuštati.

Uz svaki elektronski regulator pakuje se jasno tehničko uputstvo za povezivanje i korišćenje. (slika)

Elektronski regulator za LED rasvetu može da dimuje LED sijalice do 200W. Izuzetne tehničke karakteristike omogućavaju savršeno dimovanje bez treperenja.

#### Prednosti:

- Višefunkcionalni regulator svetlosti
- Jednostavno programiranje tasterom
- Ugradnja u postojeću instalaciju
- Mogućnost dimovanja dimabilnih sijalica male snage (1-3W)

### DIMMERS

*In nature the most beautiful light occurs in the twilight. In the house, the electronic controller helps to create a pleasant lighting atmosphere where you can relax.*

*With each electronic controller is packed a clear technical guidelines for connection and use.*

*Dimmer for LED can regulate LED lights up to 200W. Exceptional technical characteristics provide a perfect flicker-free dimming.*

#### Benefits:

- Multifunctional Dimmer
- Simple programming button
- Installation in an existing installation
- Possibility of dimming of low power (1-3W) dimmable bulbs



### KOMUNIKACIJE

Telefon, TV, Internet – teško je zamisliti sadašnjicu bez komunikacija. Experience komunikacijske priključnice garantuju optimalnu povezanost i visoku pouzdanost prenosa podataka kroz konektore RJ12 i RJ45 koji zadovoljavaju standarde Cat3, Cat5e, Cat6 i Cat6A.

Provodnici se spajaju u konektore bez upotrebe alata (toolless) umetanjem provodnika koji se automatski vezuje sa kontaktima zatvaranjem konektora. Konektori RJ45 zadovoljavaju standarde vezivanja TIA/EIA 568A ili 568B.

### COMMUNICATIONS

*Telephone, TV, Internet – it is hard to imagine the present without communications. Experience communications modules guarantee optimal connection and high reliability of data transfer through the RJ12 and RJ45 connectors that meet the standards Cat3, Cat5e, Cat6 and Cat6A.*

*The conductors are connected to the connectors without tools (tool-less) by inserting conductor that is automatically associated with contact closure connector. RJ45 connectors meet the standards binding TIA / EIA 568A or 568B.*



## DEKORATIVNE MASKE

Maske modularnog programa Experience svojom nekonvencionalnom dimenzijom (92mm visine) i svojim jasnim geometrijskim linijama zadovoljavaju i klasične i moderne zahteve korisnika.


Novina Experience modularnog sistema je posebno dizajniran nosač maske, koji je sastavni deo dekorativne maske. Nosač maske proizvodi se u tri boje: bela, crna i silver. Sa prednje strane vidi se kao međuram koji naglašava dizajn maske. Gledano sa strane, maska sa nosačem deluje kao da „lebdí“ na zidu.

## DECORATIVE COVER FRAMES

Cover frames of modular program Experience with its unconventional dimensions (92mm in height) and its clear geometric lines meet both classic and modern customer demands.

Novelty of Experience modular program is specially designed frame holder, that is an integral part of decorative cover frame. Frame holder is made in three colors: white, black and silver. From the front it looks like inner frame that emphasizes frame design. Seen from the side, the decorative cover frame together with the frame holder appears to “float” on the wall.

- Prekrivna maska se postavlja bez alata jednostavnim utiskivanjem na prirubnicu
- Skidanje maske je veoma jednostavno i izvodi se izvijačem na predviđenom mestu čime se smanjuje mogućnost oštećenja

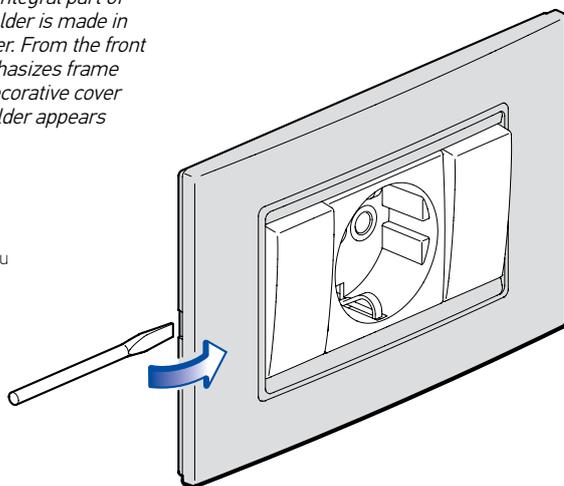

- The covering frame is positioned without any tools by simple pressing onto the flange
- The removal of frame is very simple by using the screw driver on the provided point thus reducing the possibility of any damage

## PRIRUBNICE


Prirubnica je konstruisana tako da poseduje čvrstinu i otpornost na udare i vrlo je jednostavna za ugradnju. Fleksibilna montaža čak i kod neravnih zidova omogućuje da postavljeni sklop uvek stoji ravno.

Mesta za ugradnju na prirubnici i simetrična geometrija prirubnice 2M omogućava horizontalnu i vertikalnu ugradnju u nizu.


## MOUNTING FRAMES

Mounting frame is designed to be hard, withstand impacts and is very easy for installation. A flexible installation allows that even at rough walls assembly can be installed straight.

Holes on mounting frame and symmetric geometry of mounting frame 2M are allowing horizontal and vertical installation in a row.

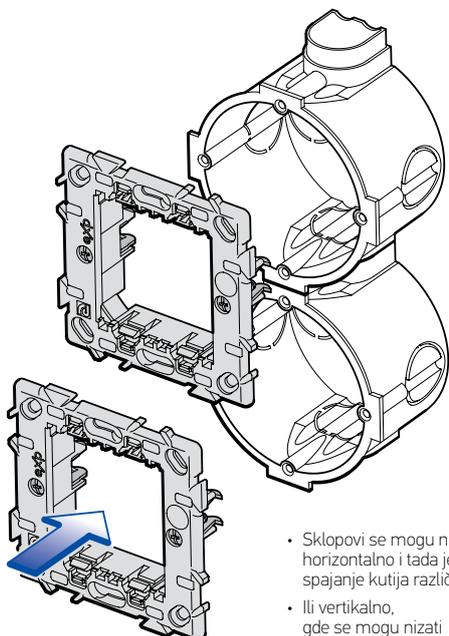

- Sklopovi se mogu nizati horizontalno i tada je moguće spajanje kutija različite veličine.
- Ili vertikalno, gde se mogu nizati samo kutije iste veličine.

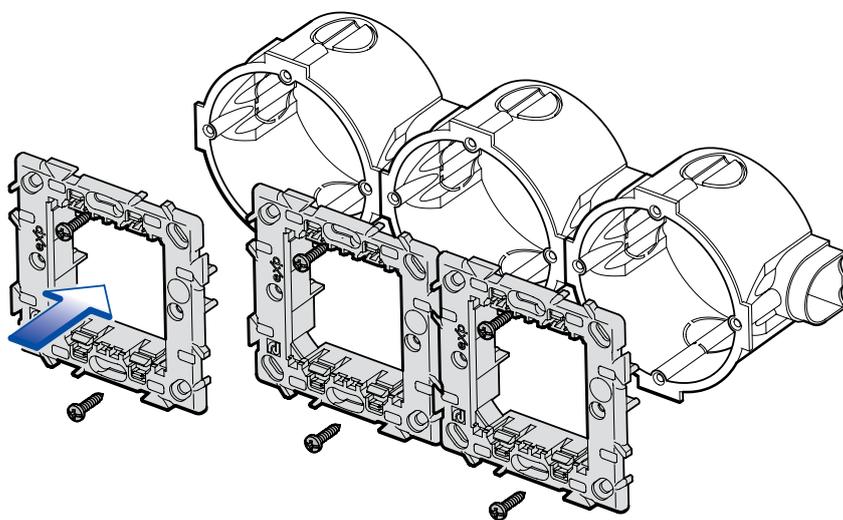

- The assemblies can be followed in a row horizontally and then it is possible to connect the installation boxes of various sizes.
- Or vertically, where only the boxes of the same size can follow in a row.

# experience *Frame*

Harmonična kombinacija ravnih ivica i zakrivljenih površina omogućava da se postigne savršen balans između oštih definicija i mekih, zakrivljenih oblika. Ovaj spoj donosi notu sofisticiranosti i elegancije u dizajn, stvarajući vizuelni dojam koji intrigira posmatrača.

*The harmonious combination of straight edges and curved surfaces makes it possible to achieve a perfect balance between sharp definitions and soft, curved shapes. This combination brings a touch of sophistication and elegance to the design, creating a visual impression that intrigues the viewer.*



# experience

## BASIC

BASIC karakteriše ultimativna elegancija i smeje kombinacije kontrasta svetlosti i tame dopunjenih srebrom. U BASIC liniji tri su osnovne boje maski: bela, crna i silver. Svaka maska dolazi u 3 kombinacije nosača maske.

*BASIC reflects the ultimate elegance and bold contrast of light and dark colors complemented with silver touch. Each mask comes in 3 different combinations with mask holder.*



## COLOR

COLOR grupu proizvoda čini 16 maski podeljenih u razigrani kolorit pod nazivom VIVID, metalik efekat pod nazivom METALLIC i nežne na dodir SOFT TOUCH.

*COLOR consists of 16 cover frames divided into playful colors named VIVID, metallic effect called METALLIC and tender on touch called SOFT TOUCH.*


Linija VIVID sastoji se od 4 pastelne boje sa belim nosačem maske (pastel plava, pastel zelena, pastel narandžasta i lavanda) i 3 neobična kontrasta sa crnim nosačem maske (krem, grafit i crvena)

*VIVID line has 4 pastel colors with white mask holder (pastel blue, pastel green, pastel orange and lavender) and 3 contrast colors with black mask holder (beige, graphite and red)*



Linija METALLIC sastoji se od 7 metalik boja sa istovetnom nijansom nosača maske (metalik zlatna, zlatna sjaj, zlatna saten, antik srebro, aluminijum, metalik zelena, metalik plava).

*METALLIC line consists of 7 metallic colors with the same shade of mask holder (metallic gold, shiny gold, satin gold, antique silver, aluminum, metallic green, metallic blue)*

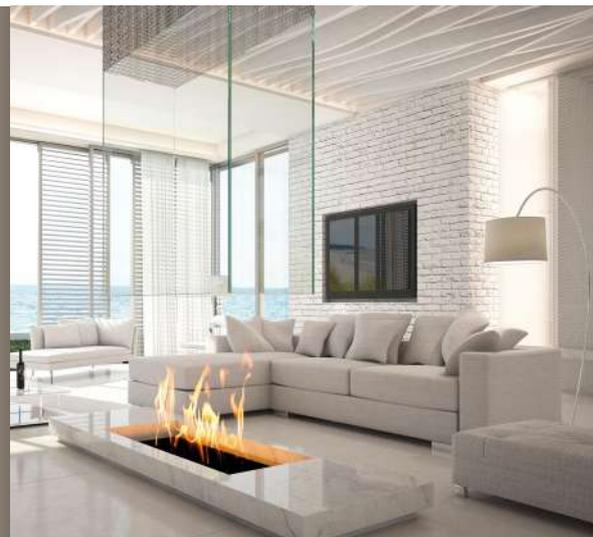

Liniju SOFT TOUCH čine 2 osnovne boje: sky blue i soft touch crna. Novina je sky blue boja (bela sa fosforom) koja u mraku svetli plavičastim svetlom.

*SOFT TOUCH line has 2 colors: sky blue and soft touch black. The novelty is sky blue color (white phosphorus) that illuminates in the dark bluish light.*



## EXCLUSIVE

EXCLUSIVE grupa maski proizvedena je od prirodnih materijala i podjeljena je na maske izrađene od prirodnog drveta WOOD, sofisticirane maske izrađene od stakla GLASS i robusne maske izrađene od metala METAL. Sve maske u EXCLUSIVE grupi izrađuju se sa crnim nosačem maske.

*EXCLUSIVE group mask is made of natural materials and is divided into a mask made of natural Wood, sophisticated masks made of Glass and robust mask made of Metal. All the masks EXCLUSIVE group are made with black mask carrier.*

Liniju WOOD čine četiri elegantne pune drvene maske: wenge, orah, trešnja i javor

*WOOD line is made of natural wood and consists of four elegant cover frames: wenge, nut, cherry and maple*



Linija GLASS sastoji se od 4 staklene maske u boji: kristal bela, kristal crna, ice silver i koral

*GLASS line is made of colored glass and consists of four shiny colors: Crystal white, crystal black, ice silver and coral.*



Liniju METAL čine četiri maske od metala: titanijum, aluminijum, bakar patina i antracit kristal

*METAL line is made of metal and has four colors: titanium aluminium, copper patina and anthracite crystal.*



## SKLOPKE SWITCHES

- Usaglašeno sa IEC 60669-1
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60669-1
- Installation into the mounting frame by pressing



### 72101

Sklopka jednopolna  
16AX 250V~ EXP 1M  
bez tastera

*Single-pole switch  
16AX 250V~ EXP 1M  
without button*



### 72103

Sklopka naizmjenična  
16AX 250V~ EXP 1M  
bez tastera

*Two-way switch  
16AX 250V~ EXP 1M  
without button*



### 72106

Sklopka dvopolna  
10AX 250V~ EXP 1M  
bez tastera

*Double-pole switch  
10AX 250V~ EXP 1M  
without button*



### 72104

Sklopka ukrсна  
16AX 250V~ EXP 1M  
bez tastera

*Intermediate switch  
16AX 250V~ EXP 1M  
without button*



### 72111

Taster sklopka jednopolna  
16A 250V~ EXP 1M bez tastera

*Single-pole push-button switch 16A  
250V~ EXP 1M without button*

- Indikacija svetli kada je sklopka isključena
- Indication is on when the switch is off



### 72105

Sklopka jednopolna 16AX 250V~  
EXP 1M sa priključkom za nulti  
provodnik (indikacija sa provodnicima)  
bez tastera

*Single-pole switch 16AX 250V~ EXP  
1M with connection for the neutral  
conductor (indication with contacts)  
without button*



### 72107

Sklopka jednopolna 16AX 250V~ EXP  
1M sa priključkom na nulti provodnik  
(indikacija sa kontaktima) bez tastera

*Single-pole switch 16AX 250V - EXP 1M  
with connection for the neutral conductor  
(indication with contacts) without button*

- Indikacija svetli kada je sklopka uključena
- Indication is on when the switch is on




### 72117.x

Potezna taster  
sklopka jednopolna  
16A 250V~ EXP 1M

*Push-button  
single-pole with cord  
16A 250V~ EXP 1M*

	Bela White	<b>x = 0</b>
	Crna soft Soft black	<b>x = E1</b>
	Silver Silver	<b>x = S</b>
	Krem Beige	<b>x = 9</b>

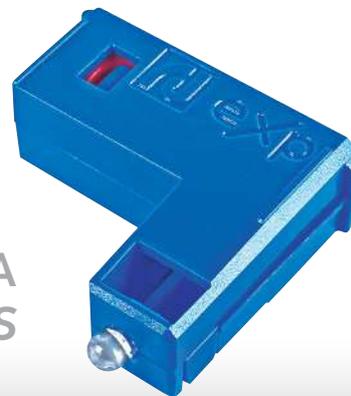

## LED INDIKATORSKA SVETLA LED INDICATION LAMPS

- Za indicaciju kada je sklopka uključena
- Za indicaciju kada je sklopka isključena

- For indication when the switch is on
- For indication when the switch is off



### 72181.4

LED indicacija 230V~  
sa kontaktima  
(za indicaciju) EXP,  
crveno

*LED lamp 230V~  
with contacts  
(for indication) EXP,  
red*



### 72181.5

LED indicacija 230V~  
sa kontaktima  
(za indicaciju) EXP,  
plavo

*LED lamp 230V~  
with contacts  
(for indication) EXP,  
blue*



### 72183.4

LED indicacija 24V~  
sa kontaktima  
(za indicaciju) EXP,  
crveno

*LED lamp 24V~  
with contacts  
(for indication) EXP,  
red*

- Koristi se za indicaciju kada je sklopka isključena (jednopolna sklopka, taster sklopka i naizmenična sklopka sa indicacijom)


- Used for indication when the switch is off (unipolar switch, push - button switch and two-way switch with indication)



### 72182.4

LED indicacija 230V~  
sa provodnicima  
(za indicaciju) EXP,  
crveno

*LED lamp 230V~  
with conductors  
(for indication) EXP,  
red*

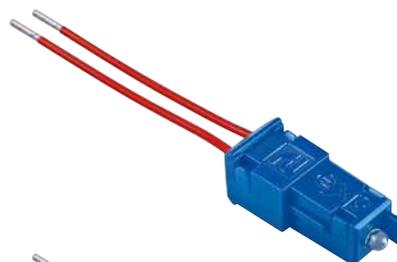

### 72182.5

LED indicacija 230V~  
sa provodnicima  
(za indicaciju) EXP,  
plavo


*LED lamp 230V~  
with conductors  
(for indication) EXP,  
blue*



### 72182.0

LED indicacija 230V~  
sa provodnicima  
(za indicaciju) EXP,  
belo

*LED lamp 230V~  
with conductors  
(for indication) EXP,  
white*

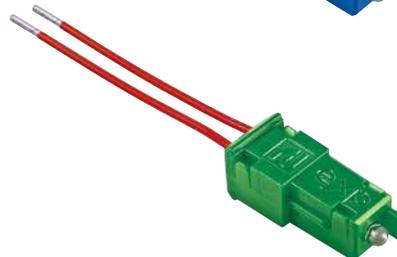


### 72182.12

LED indicacija 230V~  
sa provodnicima  
(za indicaciju) EXP,  
zeleno


*LED lamp 230V~  
with conductors  
(for indication) EXP,  
green*

- Koristi se za indicaciju kada je sklopka uključena (jednopolna sa priključkom za nulti provodnik, dvopolna)
- Koristi se za indicaciju kada je sklopka isključena (ukrsna)

- Used for indication when the switch is on (single-pole switch with connection for the neutral conductor, double-pole switch)
- Used for indication when the switch is off (intermediate switch)

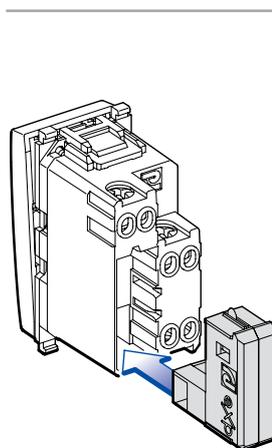


- Taster sklopka, jednopolna sa indicacijom sa kontaktima i naizmenična sklopka sa indicacijom koriste indicaciju sa kontaktima koja se jednostavno utisne u ležište (vidi sliku)
- Push-button switch, single-pole switch with indication are using LED lamp with contacts that is simply pressed into bearing (see image)

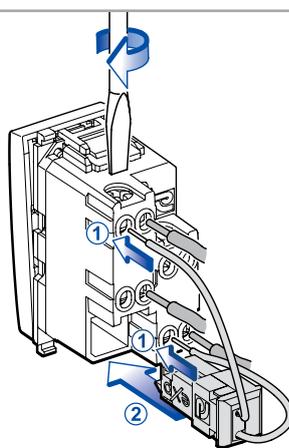

- Za jednopolnu sklopku sa priključkom za nulti provodnik koristi se LED indicacija sa provodnicima. Provodnici se postavljaju zajedno sa instalacionim provodnicima (1) i potom se indicacija utisne u ležište (2)

- Single-pole switch with connection for the neutral conductor is using LED lamp with conductors. Conductors are placed together with installation conductors (1) and then indication is pressed into the bearing (2)

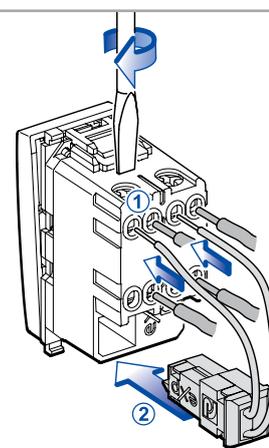


- Za dvopolnu i ukrсну sklopku koristi se LED indicacija sa provodnicima. Provodnici se postavljaju zajedno sa instalacionim provodnicima (1) i potom se indicacija utisne u ležište (2)

- Double-pole switch and intermediate switch are using LED lamp with conductors. Conductors are placed together with installation conductors (1) and then indication is pressed into the bearing (2)

# experience

## TASTERI SWITCH BUTTONS

	Bela White	<b>x = 0</b>
	Crna soft Soft black	<b>x = E1</b>
	Silver Silver	<b>x = S</b>
	Krem Beige	<b>x = 9</b>

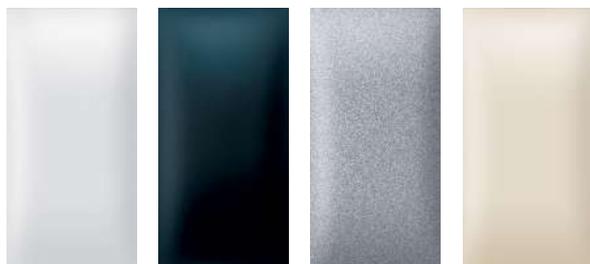

### 73101.x 1M

Taster EXP 1M  
Button EXP 1M

- Taster 1M širine 22,2mm
- Taster 2M širine 44,4mm
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem
- Button 1M width 22,2mm
- Button 2M width 44,4mm
- For switches without indication;
- Installation onto the switch by pressing




### 73301.x 2M

Taster EXP 2M  
Button EXP 2M



### 73201.x 1M

Taster sa indikacijom  
EXP 1M  
Button with indication  
EXP 1M

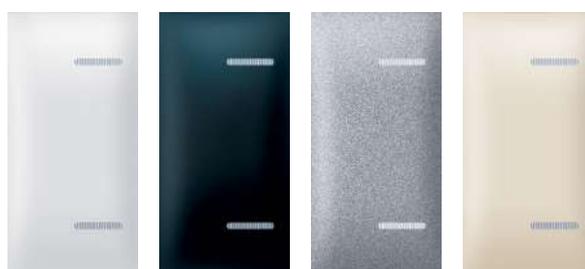

### 73401.x 2M

Taster sa indikacijom  
EXP 2M  
Button with indication  
EXP 2M

- Taster 1M širine 22,2mm
- Taster 2M širine 44,4mm
- Za sklopke sa indikacijom
- Ugradnja na sklopku utiskivanjem
- Button 1M width 22,2mm
- Button 2M width 44,4mm
- For switches with indication
- Installation onto the switch by pressing

### 73221.x 1M

Taster sa duplom  
indikacijom  
EXP 1M  
Button with  
double indication  
EXP 1M



### 70001.x

Poklopac maske  
(slepi modul) EXP 1M  
Blank module  
EXP 1M

- Za pokrivanje mesta gde nedostaje modul
- Pokriva širinu jednog modula 22,2mm
- Ugradnja u noseću priрубnicu utiskivanjem
- For covering the places where module is missing
- Covers the width of one module 22,2mm
- Installation into the holding frame by pressing



### 70002.x

Poklopac maske  
(slepi modul) EXP 2M  
Blank module  
EXP 2M

- Za pokrivanje mesta gde nedostaje modul
- Pokriva širinu dva modula 44,4mm
- Ugradnja u noseću priрубnicu utiskivanjem
- For covering the places where module is missing
- Covers the width of two module 44,4mm
- Installation into the holding frame by pressing


## TASTERI SA UGRAVIRANIM SIMBOLIMA SWITCH BUTTONS ENGRAVED WITH THE SYMBOLS



EXP 1M	73104.x	73105.x	73106.x	73107.x	73102.x	73102.x	
<b>EXP 2M</b>	<b>73304.x</b>	<b>73305.x</b>	<b>73306.x</b>	<b>73307.x</b>	<b>73302.x</b>	<b>73303.x</b>	
sa oznakom with symbol	pojačavanja amplification	ključa key	0-I 0-I	posluge servants	strelica gore arrow up	strelica dole arrow down	
<ul style="list-style-type: none"> <li>• Taster 1M širine 22,2mm</li> <li>• Taster 2M širine 44,4mm</li> <li>• Za sklopke bez indikacije;</li> <li>• Ugradnja na sklopku utiskivanjem</li> </ul>							<b>x = 0</b> Bela White
							<b>x = E1</b> Crna soft Soft black
<ul style="list-style-type: none"> <li>• Button 1M width 22,2mm,</li> <li>• Button 2M width 44,4mm</li> <li>• For switches without indication;</li> <li>• Installation onto the switch by pressing</li> </ul>							<b>x = S</b> Silver Silver
							<b>x = 9</b> Krem Beige

EXP 1M	73202.x	73203.x	73204.x	73205.x	73206.x	73207.x	73208.x	73209.x	73222.x
<b>EXP 2M</b>	<b>73402.x</b>	<b>73403.x</b>	<b>73404.x</b>	<b>73405.x</b>	<b>73406.x</b>	<b>73407.x</b>	<b>73408.x</b>	<b>73409.x</b>	
sa indikacijom i oznakom with indicator and symbol	svetla light	zvona bell	bojlera boiler	grejalice heater	ventilatora fan	priključnice socket	veš mašine washing machine	tuša shower	roletne shutters
<ul style="list-style-type: none"> <li>• Taster 1M širine 22,2mm</li> <li>• Taster 2M širine 44,4mm</li> <li>• Za sklopke sa indikacijom</li> <li>• Ugradnja na sklopku utiskivanjem</li> </ul>									
<ul style="list-style-type: none"> <li>• Button 1M width 22,2mm</li> <li>• Button 2M width 44,4mm</li> <li>• For switches with indication</li> <li>• Installation onto the switch by pressing</li> </ul>									

- Taster se zakači na jednu stranu sklopke, a druga strana se lagano pritisne da klikne taster.
  - **Napomena:**
  - kod tastera sa indikacijom voditi računa o položaju indikacije (vidi sliku 1 i 2)
  - stavljanje tastera je jednostavnije ukoliko se prvo zakači na podignutoj strani sklopke (kao na slici 1 i 2)
  - Taster 2M poseduje nosač koji je sastavni deo tastera 2M; zajedno sa postavljanjem tastera 2M potrebno je utisnuti i nosač u pribudnicu (slika 2)
- The button is hooked to one side of switch, and the other side is lightly pressed until button is clicked.
  - **Note:**
  - At buttons with indication pay attention of the position of indication (see picture 1 and 2)
  - placing the button is easier if first snap to the raised side of the buttons (see picture 1 and 2)
  - Button 2M has a carrier which is an integral part of button 2M; along with setting of button 2M it is necessary to press-in holder into the mounting frame (picture 2)

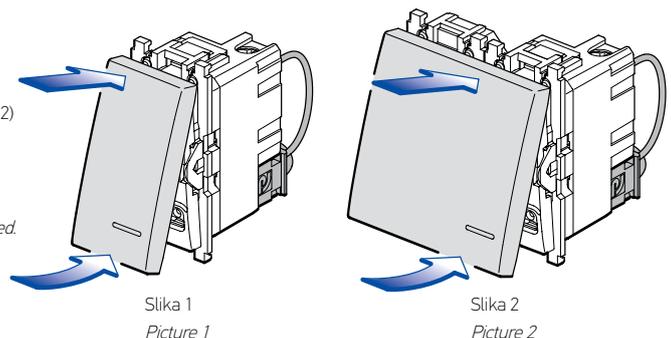

Slika 1  
Picture 1

Slika 2  
Picture 2



experience

## SKLOPKE ZA ROLETNE SWITCHES FOR SHUTTERS


- Par taster sklopki povezanih za upravljanje kretanjem elektromotora za roletne u dva smera
- A pair of connected push-button switches for the control of shutters' electric motor movement in two directions



### 72114.x

Taster sklopka  
za roletne  
16A 250V~ EXP 2M

*Rolling shutter  
push-button switch  
16A 250V~ EXP 2M*

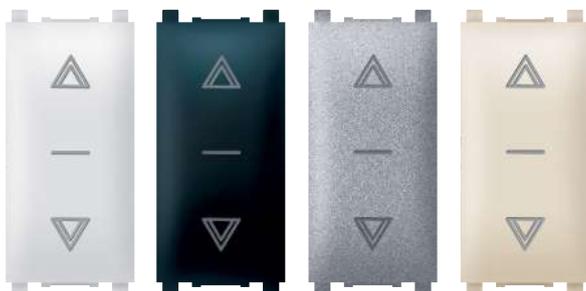

### 72108.x

Sklopka za roletne  
10AX 250V~ EXP 1M

*Rolling shutter switch  
10AX 250V ~ EXP 1M*

- za upravljanje kretanjem elektromotora za roletne u dva smera
- tri stabilna položaja I-0-I

- for control of shutters' electric motor movement in two directions
- three stable positions I-0-I



### 72118.x

Taster sklopka  
za roletne  
10A 250V~ EXP 1M

*Rolling shutter push-  
button switch  
10A 250V ~ EXP 1M*

- za upravljanje kretanjem elektromotora za roletne u dva smera

- for control of shutters' electric motor movement in two directions

experience

## ELEKTRONIKA ELECTRONICS

- Relejni izlaz max 500W za sve tipove sijalica;
- Regulacija vremena isključenosti 10 s - 10 min;
- Regulacija osvetljenosti pri kojoj senzor reaguje 2 - 2000 lx;
- Regulacija svetlosti;
- Mogućnost aktiviranja spoljnim tasterom;
- Vidni ugao po horizontali 110°;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija

- Relay exit max 500W for all lamps;
- Time regulation 10 s - 10 min;
- Light treshold regulation 2 - 2000 lx;
- Sensitivity lever regulation;
- External push button activation;
- Horizontal view angle 110°;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication



### 72203.x

Infracrveni detektor  
pokreta EXP 2M  
500W, 230V~/50Hz

*Infrared motion  
detector EXP 2M  
500W, 230V~/50Hz*

	Bela White	<b>x = 0</b>
	Crna soft Soft black	<b>x = E1</b>
	Silver Silver	<b>x = S</b>
	Krem Beige	<b>x = 9</b>

experience

ELEKTRONIKA  
ELECTRONICS



### 72208.x

Elektronski regulator za LED 4-160W EXP 1M

*Electronic LED dimmer 4-160W EXP 1M*

- Za sijalice sa užarenim vlaknom, dimabilne LED i halogene sijalice, 4-160W 1M;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću pribudnicu utiskivanjem;
- Indikacija

- *For incandescent bulbs, dimmable LED and halogen bulbs, 4-160W 1M*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication*




### 72202.x

Elektronski regulator sa naizmeničnom sklopkom EXP 1M, 40-300VA

*Dimmer with two-way switch EXP 1M, 40-300VA*

- Za sijalice sa užarenim vlaknom i halogene sijalice sa standardnim transformatorom 230V- 40-300W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću pribudnicu utiskivanjem;
- Indikacija

- *For the incandescent lamps and halogen lamps with standard transformer 230V- 40-300W;*
- *For halogen lamps with standard transformer 40-300VA;*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication*

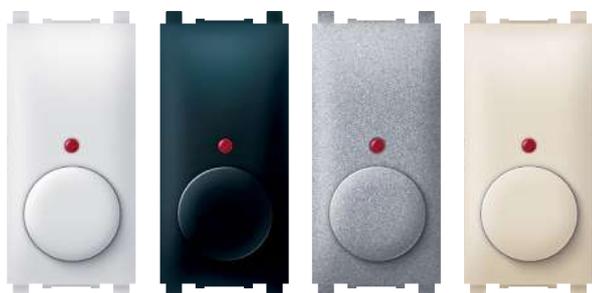

### 72204.x

Elektronski regulator za induktivno opterećenje, EXP 1M, 40-300VA

*Dimmer for inductive load, EXP 1M 40-300VA*

- Za sijalice sa užarenim vlaknom i halogene sijalice 230V- 40-500W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Za halogene sijalice sa elektronskim transformatorom 40-200VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću pribudnicu utiskivanjem;
- Indikacija uključivosti

- *For the incandescent lamps and halogen lamps 230V- 40-500W;*
- *For halogen lamps with standard transformer 40-300VA;*
- *For halogen lamps with electronic transformer 40-200VA;*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication when dimmer is ON*




### 72205.x

Elektronski regulator za LED, EXP 1M, 200W

*Dimmer for LED, EXP 1M, 200W*

- Univerzalni taster elektronski regulator za sve vrste sijalica;
- Osnovna namena za CFL i LED dimabilne sijalice do 200W;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću pribudnicu utiskivanjem;
- Indikacija

- *Universal push-button dimmer for all types of bulbs;*
- *The main purpose for dimmable CFL and LED bulbs up to 200W;*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication*

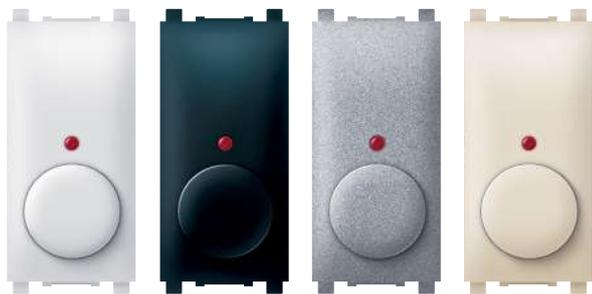

### 72206.x

Elektronski regulator sa rotacionom sklopkom EXP 1M, 800W

*Dimmer rotative 800W EXP 1M*

- Za sijalice sa užarenim vlaknom i halogene sijalice sa standardnim transformatorom 230V- 40-300W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću pribudnicu utiskivanjem;
- Indikacija

- *For the incandescent lamps and halogen lamps with standard transformer 230V- 40-300W;*
- *For halogen lamps with standard transformer 40-300VA;*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication*

# experience

## SET SKLOPKI ZA KUPATILO BATHROOM SWITCH-SET

- Usaglašeno sa IEC 60669-1;
- Ugradnja u montažnu kutiju pomoću vijaka
- Complied with IEC 60669-1;
- Installation into the mounting box by screws



### 72303.00

Set sklopki za kupatilo 3x16AX 250V~ sa indikatorom i kutijom 3M, horizontalno (svetlo, grejalica, bojler) EXP

*Bathroom switch set 3x16AX 250V~ with indicator and mounting box 3M horizontal (light, heater, boiler) EXP*



### 72304.00

Set sklopki za kupatilo 4x16AX 250V~ sa indikatorom i kutijom 4M, horizontalno (svetlo, ventilator, grejalica, bojler) EXP

*Bathroom switch set 4x16AX 250V~ with indicator and mounting box 4M horizontal (light, fan, heater, boiler) EXP*



### 72306.00

Set sklopki za kupatilo 3x16AX 250V~ sa indikatorom i kutijom 2x2M, vertikalno (svetlo 2M, grejalica, bojler) EXP

*Bathroom switch set 3x16AX 250V~ with indicator and mounting box 2x2M vertical (light 2M, heater, boiler) EXP*



### 72308.00

Set sklopki za kupatilo 4x16AX 250V~ sa indikatorom i kutijom 2x2M, vertikalno (svetlo, ventilator, grejalica, bojler) EXP

*Bathroom switch set 4x16AX 250V~ with indicator and mounting box 2x2M vertical (light, fan, heater, boiler) EXP*

- Ugradnja u dve vertikalne nizajuće kutije Ø60 pomoću vijaka
- Installation into two vertical mounted boxes Ø60 by screws



### 72310.00

Set sklopki za kupatilo 3x16AX 250V~ sa indikatorom **UNIVERZALNI** - horizontalno (svetlo, grejalica, bojler) EXP

*Bathroom switch set 3x16AX 250V~ with indicator **UNIVERSAL** - horizontal (light, heater, boiler) EXP*



**72310.E1E1**



**72310.SS**



**72310.99**

Univerzalno rešenje za montažu na već ugrađene kutije (od 108 - 135mm) ili na kutije veličine 4M. Visina maske iznosi 91,8mm

*Universal solution for mounting on existing mounting boxes (from 108 - 135mm) or on mounting boxes 4M. Decorative frame height is 91,8mm*

# UNIVERZALNI KUPATILSKI INDIKATORI UNIVERSAL BATHROOM SWITCH-SET



**72323.00**

**72323.E1E1**

**72323.SS**

**72323.99**

Set sklopki za kupatilo 3x16AX 250V~ sa indicijom  
**UNIVERZALNI** - vertikalni (grejalica, bojler, svetlo 2M) EXP

*Bathroom switch set 3x16AX 250V~ with indication  
**UNIVERSAL** - vertical (heater, boiler, light 2M,) EXP*

- Ugradnja u dve vertikalne nizajuće kutije Ø60 pomoću vijaka

- Installation into two vertical mounted boxes Ø60 by screws

Univerzalno rešenje za montažu na već ugrađene kutije  
(od 108 - 135mm) ili na kutije veličine 4M.

*Universal solution for mounting on existing mounting boxes  
(from 108 - 135mm) or on mounting boxes 4M.*



**72324.00**

**72324.E1E1**

**72324.SS**

**72324.99**

Set sklopki za kupatilo 4x16AX 250V~ sa indicijom  
**UNIVERZALNI** - vertikalni (grejalica, bojler, svetlo, ventilator) EXP

*Bathroom switch set 4x16AX 250V~ with indicator  
**UNIVERSAL** - vertical (heater, boiler, light, fan) EXP*

- Ugradnja u dve vertikalne nizajuće kutije Ø60 pomoću vijaka

- Installation into two vertical mounted boxes Ø60 by screws

Univerzalno rešenje za montažu na već ugrađene kutije  
(od 108 - 135mm) ili na kutije veličine 4M.

*Universal solution for mounting on existing mounting boxes  
(from 108 - 135mm) or on mounting boxes 4M.*



experience


PRIKLJUČNICE NERASTAVNE  
IN SEPARABLE SOCKET OUTLETS



**74151.x**

Priključnica dvopolna  
nerastavna  
16A 250V~ EXP 2M


*Double-pole socket  
outlet in separable  
16A 250V~ EXP 2M*

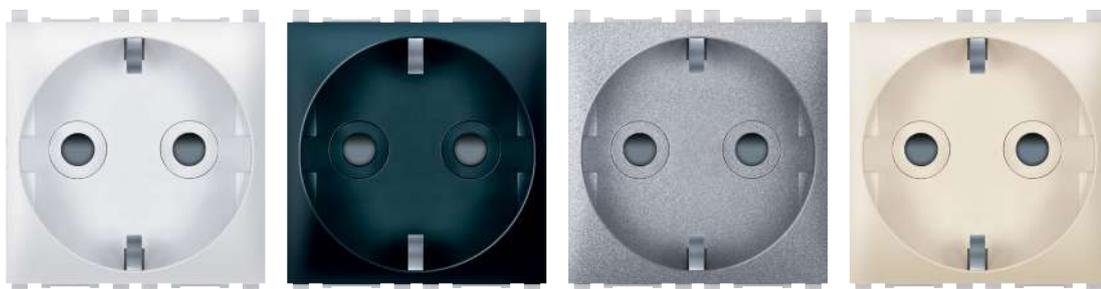

**74152.x**

Priključnica dvopolna  
nerastavna sa zaštitom  
kontakata 16A 250V~ EXP 2M


*Double-pole socket outlet in  
separable with safety shutter  
16A 250V~ EXP 2M*

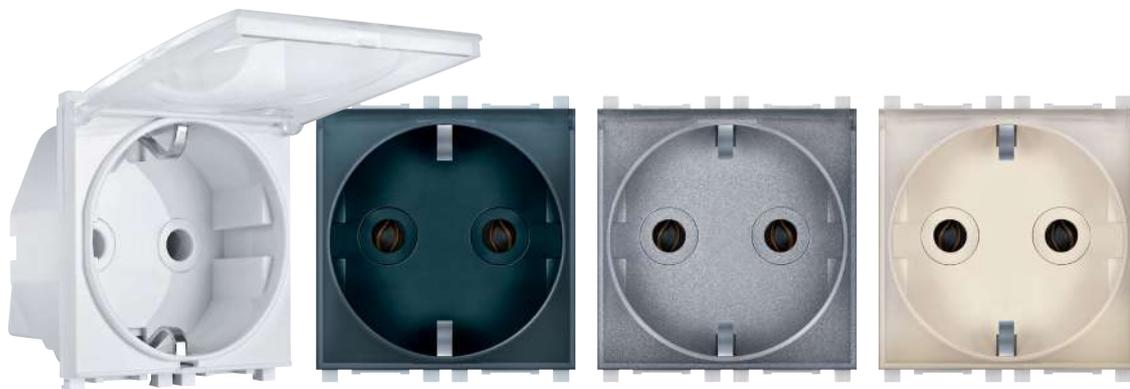

**74153.xT**

Priključnica dvopolna  
nerastavna sa transparentnim  
poklopcem 16A 250V~ EXP 2M

*Double-pole socket outlet in  
separable with transparent  
cover 16A 250V~ EXP 2M*


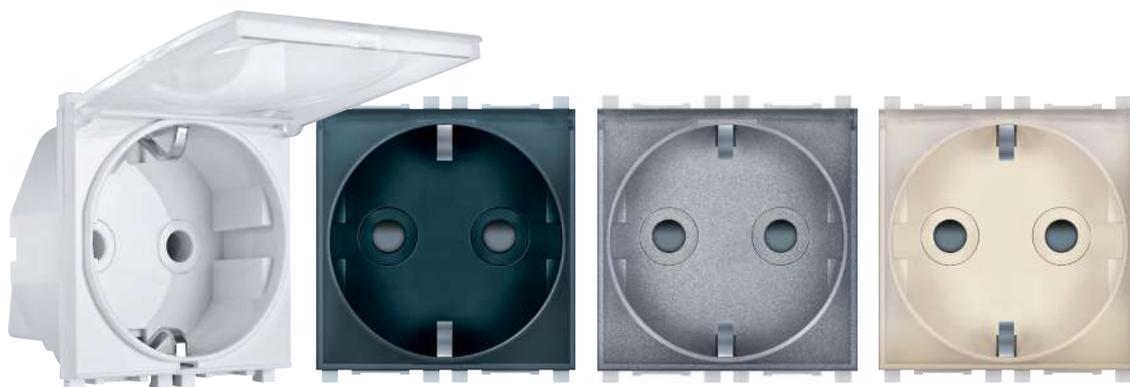


**74154.xT**

Priključnica dvopolna  
nerastavna sa transparentnim  
poklopcem i zaštitom kontakata  
16A 250V~ EXP 2M

*Double-pole socket outlet in  
separable with transparent  
cover and safety shutter  
16A 250V~ EXP 2M*

- Usaglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60884-1
- Installation into the mounting frame by pressing



#### 74151.4

crveni blok  
*red block*

- Za mreže sa UPS (sa transformatorom)
- For power networks with UPS (with transformer)

#### 74151.12

zeleni blok  
*green block*

- Za mreže sa zaštićenim generatorskim napajanjem
- For power networks with protected generator supply via transformer

#### 74151.N

narandžasti blok  
*orange block*

- Za mreže sa generatorskim napajanjem preko transformatora
- For power networks with generator supply via transformer




#### 74162.x

Sklop dve priključnice dvopolne nerastavne 16A 250V ~ EXP 2x2M premoštene

*Double-pole sockets set in separable 16A 250V~EXP 2x2M bridged*

- Premošteni sklopovi priključnica
- Dovoljno je samo priključiti napojni kabl
- Socket outlet assembly with bridged contact
- One need only connected cable



#### 74163.x

Sklop tri priključnice dvopolne nerastavne 16A 250V ~ EXP 3x2M premoštene

*Double-pole sockets set in separable 16A 250V~EXP 3x2M bridged*



#### 74121.x

Priključnica dvopolna 10A 250V~ EXP 1M, CEI 23-50/P11 italijanska

*Double-pole socket outlet CEI 10A 250V~ EXP 1M*

- Complied with CEI 23-50/P11;
- Installation into the mounting frame by pressing



#### 74121.4

Priključnica dvopolna 10A 250V~ EXP 1M, CEI 23-50/P11 italijanska, crvena

*Double-pole socket outlet 10A 250V~ EXP 1M, CEI 23-50/P11 italian type, red*

- Za mreže sa UPS (sa transformatorom)
- For power networks with UPS (with transformer)

- Usaglašeno sa CEI 23-50/P11;
- Ugradnja u noseću prirubnicu utiskivanjem



### 74211.x

Priključnica telefonska Keystone RJ12 6/4 Cat 3 EXP 1M

*Telephone socket Keystone RJ12 6/4 Cat3 EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Priključak za dve parice (linija + terminal);
- Ugradnja u noseću pribudnicu utiskivanjem
- *Complied with IEC 60603-7;*
- *Connection for two pairs (line+terminal);*
- *Installation into the mounting frame by pressing*




### 74212.x

Priključnica telefonska Keystone RJ12 6/6 Cat 3 EXP 1M

*Telephone socket Keystone RJ12 6/6 Cat3 EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Za ISDN linije;
- Montaža provodnika bez upotrebe alata;
- Ugradnja u noseću pribudnicu utiskivanjem
- *Complied with IEC 60603-7;*
- *For ISDN lines;*
- *Toolless conducting wire installation;*
- *Installation into the mounting frame by pressing*

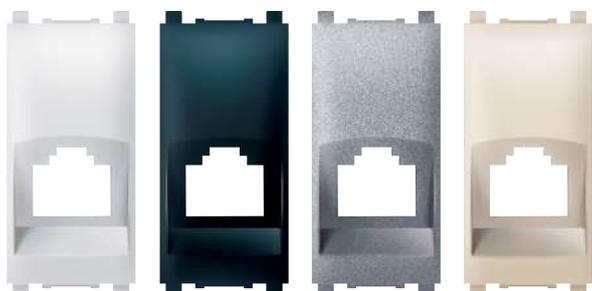

### 74201.x

Keystone nosač EXP 1M

*Keystone holder EXP 1M*

- Modul širine 22,2mm za nošenje Keystone konektora
- Ugradnja u noseću pribudnicu utiskivanjem
- *Module 22,2mm width for Keystone connectors holding*
- *Installation into the mounting frame by pressing*



### 74303

Modul Keystone Linkbasic RJ12 6/4 Cat 3

*Module Keystone Linkbasic RJ12 6/4 Cat 3*



### 74305

Modul Keystone Linkbasic RJ45 Cat 5e UTP

*Module Keystone Linkbasic RJ45 Cat 5e UTP*



### 74306

Modul Keystone Linkbasic RJ45 Cat 6 UTP

*Module Keystone Linkbasic RJ45 Cat 6 UTP*



### 74307

Modul Keystone Linkbasic RJ45 Cat 6A UTP

*Module Keystone Linkbasic RJ45 Cat 6A UTP*



### 74313

Modul Keystone Linkbasic RJ12 6/6 Cat 3

*Module Keystone Linkbasic RJ12 6/6 Cat 3*



### 74315

Modul Keystone Linkbasic RJ45 Cat 5e FTP

*Module Keystone Linkbasic RJ45 Cat 5e FTP*



### 74316

Modul Keystone Linkbasic RJ45 Cat 6 FTP

*Module Keystone Linkbasic RJ45 Cat 6 FTP*



### 74317

Modul Keystone Linkbasic RJ45 Cat 6A FTP

*Module Keystone Linkbasic RJ45 Cat 6A FTP*



### 74221.x

Priključnica komunikacijska Keystone RJ45 Cat 5e UTP EXP 1M

*Data socket Keystone RJ45 Cat5e UTP EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Toolless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



### 74222.x

Priključnica komunikacijska Keystone RJ45 Cat 5e FTP EXP 1M

*Data socket Keystone RJ45 Cat5e FTP EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Toolless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



### 74223.x

Priključnica komunikacijska Keystone RJ45 Cat 6 UTP EXP 1M

*Data socket Keystone RJ45 Cat6 UTP EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Toolless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



### 74224.x

Priključnica komunikacijska Keystone RJ45 Cat 6 FTP EXP 1M

*Data socket Keystone RJ45 Cat6 FTP EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Toolless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



### 74225.x

Priključnica komunikacijska Keystone RJ45 Cat 6A UTP EXP 1M

*Data socket Keystone RJ45 Cat6A UTP EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Toolless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



### 74226.x

Priključnica komunikacijska Keystone RJ45 Cat 6A FTP EXP 1M

*Data socket Keystone RJ45 Cat6A FTP EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Toolless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



### 74261.x

Priključnica  
antenska TV  
IEC M / F  
za individualne  
sisteme EXP 1M

*TV aerial socket  
IEC M/F for  
individual systems  
EXP 1M*

- Usaglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću pribudnicu utiskivanjem
- *Complied with IEC 169-2 - M connector;*
- *Installation of aerial cable by F connector;*
- *Without signal attenuation;*
- *Installation into the mounting frame by pressing*



### 74262.x

Priključnica  
antenska FM  
IEC F / F EXP 1M

*FM aerial socket  
IEC F/F EXP 1M*

- Usaglašeno sa IEC 169-2 - ženski konektor;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću pribudnicu utiskivanjem
- *Complied with IEC 169-2 - F connector;*
- *Installation of aerial cable by F connector;*
- *Without signal attenuation;*
- *Installation into the mounting frame by pressing*



### 74263.x

Priključnica  
antenska TV  
završna 5dB  
IEC EXP 1M

*TV aerial socket  
end-line 5db  
IEC EXP 1M*

### 74264.x

Priključnica  
antenska TV  
prolazna 10dB  
IEC EXP 1M

*TV aerial socket  
throughpass 10db  
IEC EXP 1M*

- Usaglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko vijčane veze;
- Ugradnja u noseću pribudnicu utiskivanjem
- *Complied with IEC 169-2 - M connector;*
- *Installation of aerial cable by screw terminals;*
- *Installation into the mounting frame by pressing*




### 74265.x

Priključnica  
antenska TV  
F/F EXP 1M  
za individualne  
sisteme SAT

*TV aerial socket  
F/F for individual  
systems EXP 1M*

- Završna za satelitske antene;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću pribudnicu utiskivanjem
- *Terminal for satellite aerals;*
- *Installation of aerial cable by F connector;*
- *Without signal attenuation;*
- *Installation into the mounting frame by pressing*

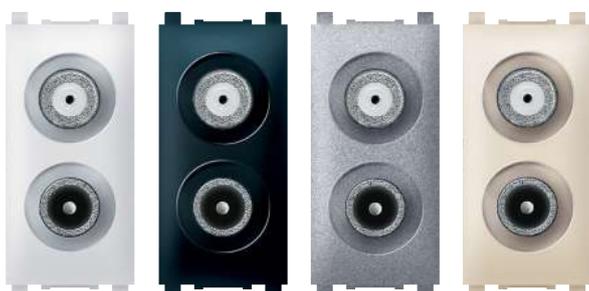

### 74266.x

Priključnica  
antenska TV/SAT  
EXP 1M

*TV/SAT aerial  
socket EXP 1M*

- TV/SAT antenska priključnica završna;
- TV konektor IEC 60169-2 10-862 MHz;
- SAT konektor IEC 61169-24 tip F 950-2400 MHz;
- Odvodno slabljenje <2dB;
- Ugradnja u noseću pribudnicu utiskivanjem
- *TV/SAT aerial socket final;*
- *TV connector IEC 60169-2 10-862 MHz;*
- *SAT connector IEC 61169-24 type F 950-2400 MHz;*
- *Coupling attenuation <2dB;*
- *Installation into the mounting frame by pressing*



### 74283.x

USB punjač  
2,1A 5V=  
EXP 2M  
  
USB charger  
2,1A 5V=  
EXP 2M

- Za punjenje elektronskih uređaja putem standardnog USB porta;
- Punjenje dva uređaja istovremeno;
- Usaglašeno sa EN 60950-1 i EMC direktivom;
- Ugradnja u noseću priрубnicu utiskivanjem

- *For charging of electronic devices via standard USB port;*
- *Enables charging of two devices simultaneously;*
- *Complied with EN 60950-1 and EMC directive;*
- *Installation into the mounting frame by pressing*



### 74289.x

USB punjač  
2,1A 5V=  
EXP 1M  
  
USB C charger  
2,1A 5V=  
EXP 1M

- Za punjenje elektronskih uređaja putem standardnog USB porta;
- Podržava USB 2.0 standard;
- Ugradnja u noseću priрубnicu utiskivanjem

- *For charging of electronic devices via standard USB port;*
- *Complied with EN 60950-1 and EMC directive;*
- *Installation into the mounting frame by pressing*



### 74284.x

Priključnica USB  
EXP 1M  
  
USB socket  
EXP 1M

- Za konekciju USB uređaja i kablova;
- Podržava USB 2.0 standard;
- Ugradnja u noseću priрубnicu utiskivanjem

- *For connection of USB devices and cables;*
- *Supports USB 2.0 standard;*
- *Installation into the mounting frame by pressing*



### 74286.x

USB tip C punjač  
3A/5V= EXP 1M  
  
USB C charger  
3A/5V= EXP 1M

- Za punjenje elektronskih uređaja putem USB C porta;
- Usaglašeno sa EN 60950-1 i EMC direktivom;
- Ugradnja u noseću priрубnicu utiskivanjem

- *For charging of electronic devices via USB C port;*
- *Complied with EN 60950-1 and EMC directive;*
- *Installation into the mounting frame by pressing*



### 74285.x

Priključnica HDMI  
EXP 1M  
  
HDMI socket  
EXP 1M

- Za konekciju kablova za prenos signala preko HDMI priključka;
- Ugradnja u noseću priрубnicu utiskivanjem
- *For the transmission of signal through HDMI connector;*
- *Installation into the mounting frame by pressing*

- Za prenos audio ili video signala;
- Montaža kabela preko BNC konektora;
- Ugradnja u noseću priрубnicu utiskivanjem



### 74281.x

Priključnica audio 2xRCA EXP 1M  
  
Audio socket 2XRCA EXP 1M

- Za prenos audio signala - stereo;
- Montaža provodnika lemljenjem;
- Ugradnja u noseću priрубnicu utiskivanjem
- *For the transmission of audio signals stereo;*
- *Installation of conducting wires by soldering;*
- *Installation into the mounting frame by pressing*



### 74282.x

Priključnica audio/video BNC/BNC EXP 1M  
  
Audio/video socket BNC/BNC EXP 1M

- Za prenos audio ili video signala;
- Montaža kabela preko BNC konektora;
- Ugradnja u noseću priрубnicu utiskivanjem
- *For the transmission of audio or video signals;*
- *Installation of cable by BNC connector;*
- *Installation into the mounting frame by pressing*



# experience *Frame*

DEKORATIVNE FRAME MASKE  
*DECORATIVE FRAME MASKS*



Harmonična kombinacija ravnih ivica i zakrivljenih površina omogućava da se postigne savršen balans između oštih definicija i mekih, zakrivljenih oblika. Ovaj spoj donosi notu sofisticiranosti i elegancije u dizajn, stvarajući vizuelni dojam koji intrigira posmatrača.

*The harmonious combination of straight edges and curved surfaces makes it possible to achieve a perfect balance between sharp definitions and soft, curved shapes. This combination brings a touch of sophistication and elegance to the design, creating a visual impression that intrigues the viewer.*

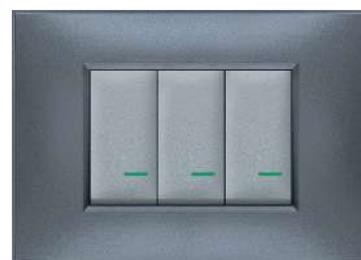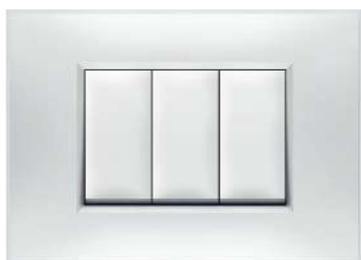




**x = 0**  
Bela maska  
White frame



**x = E**  
Crna maska  
Black frame

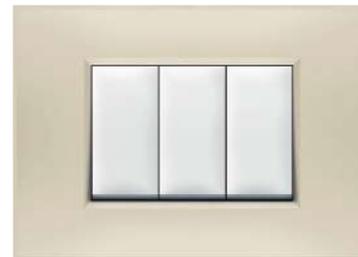

**x = 9**  
Krem maska  
Beige frame



**x = K2**  
Mat bela maska  
Mat white frame




**x = E2**  
Mat crna maska  
Mat black frame



**x = 2**  
Grafitna maska  
Graphite frame



**x = S**  
Srebrna maska  
Silver frame

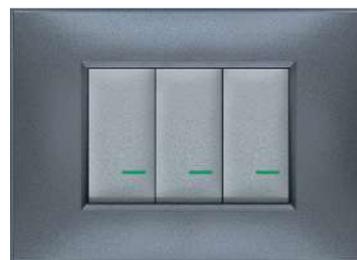

**x = S1**  
Antik silver maska  
Antique silver frame



**x = B1**  
Tobacco braon maska  
Tobacco brown frame



**x = G**  
Zlatna maska  
Gold frame



**x = G2**  
Brušeni niki maska  
Brushed nickel frame

# experience *Frame*

Proizvode se u čak 11 boja,  
kako bi se besprekorno ukombinovale  
u bilo koji ambijent vašeg doma  
ili poslovnog prostora.

*Produced in as many as 11 colors,  
so they can be seamlessly combined  
into any ambience of your home  
or office space.*

- Ugradnja na noseću  
prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting  
frame by pressing
- For covering the assembly of modules;




## 70801.x

Maska 1M  
FRAME EXP

*Cover frame 1M  
FRAME EXP*



95,6 x 86mm




## 70802.x

Maska 2M  
FRAME EXP

*Cover frame 2M  
FRAME EXP*




95,6 x 86mm

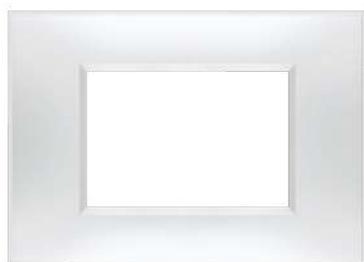

## 70803.x

Maska 3M  
FRAME EXP

*Cover frame 3M  
FRAME EXP*



118 x 86mm




## 70804.x

Maska 4M  
FRAME EXP

*Cover frame 4M  
FRAME EXP*



140,4 x 86mm

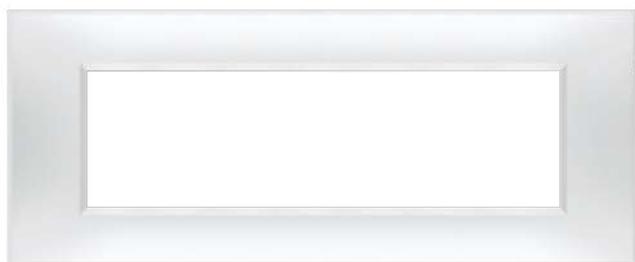

## 70807.x

Maska 7M  
FRAME EXP

*Cover frame 7M  
FRAME EXP*



207,6 x 86mm

# experience

## DEKORATIVNE MASKE DECORATIVE FRAMES

### BASIC

Raznovrsnost programa Experience, pored brojnih funkcionalnih modula, ogleda se i u izuzetno velikoj ponudi dekorativnih maski.

Podeljene su u 3 osnovne grupe BASIC, COLOR i EXCLUSIVE, u zavisnosti od boja i materijala koji su korišćeni pri izradi.

Raznolikost boja i veliki broj kombinacija, program Experience čine savršenim dekorom na zidu kako klasičnih tako i modernih, ekstravagantnih enterijera.



BELA MASKA / BELI NOSAČ  
WHITE FRAME / WHITE HOLDER



CRNA MASKA / CRNI NOSAČ  
BLACK FRAME / BLACK HOLDER



SILVER MASKA / SILVER NOSAČ  
SILVER FRAME / SILVER HOLDER



BELA MASKA / CRNI NOSAČ  
WHITE FRAME / BLACK HOLDER



CRNA MASKA / BELI NOSAČ  
BLACK FRAME / WHITE HOLDER



SILVER MASKA / BELI NOSAČ  
SILVER FRAME / WHITE HOLDER



BELA MASKA / SILVER NOSAČ  
WHITE FRAME / SILVER HOLDER



CRNA MASKA / SILVER NOSAČ  
BLACK FRAME / SILVER HOLDER



SILVER MASKA / CRNI NOSAČ  
SILVER FRAME / BLACK HOLDER

*Diversity of Experience, among numerous functional modules, reflects in very large offer of decorative masks.*

*Divided into three main groups BASIC, COLOR and EXCLUSIVE, depending on the colors and materials.*

*The variety of colors and a large number of combinations, makes Experience the perfect decor on the wall for traditional as well for the modern and extravagant interiors.*

## COLOR



VIVID MASKE  
VIVID FRAMES



METALLIC MASKE  
METALLIC FRAMES



SOFT TOUCH MASKE  
SOFT TOUCH FRAMES

## EXCLUSIVE



DRVENE MASKE  
WOODEN FRAMES



STAKLENE MASKE  
GLASS FRAMES







METALNE MASKE  
METAL TOUCH FRAMES


experience

**BASIC**  
**BELA / WHITE**

Ultimativna elegancija i prozračnost ogledaju se u geometriji oblika i odsjaju površina i kreiraju novu definiciju stila

*Ultimative elegance and lightness are reflected in the geometry of shapes and glossy surface to create a new definition of style*

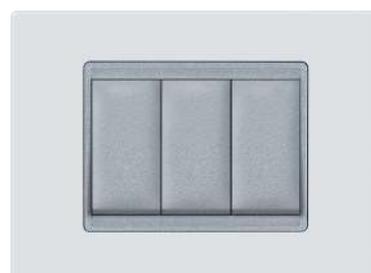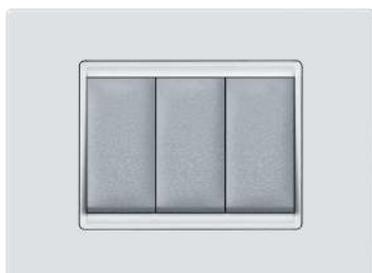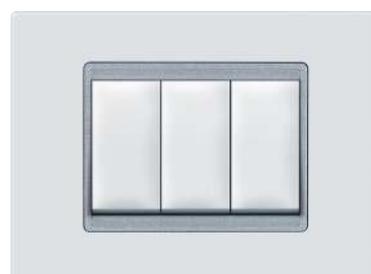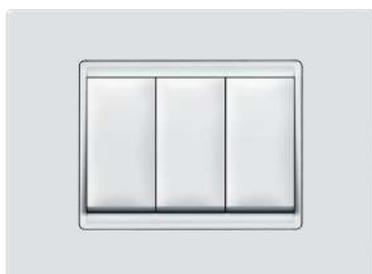

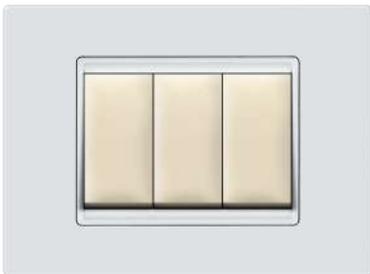


# experience

## BASIC

### BELA MASKA / BELI NOSAČ WHITE FRAME / WHITE HOLDER

- Ugradnja na noseću priрубnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;




#### 70101.00

Maska 1M EXP BASIC,  
bela sa belim nosačem

*Cover frame 1M EXP BASIC,  
white with white holder*



97,6 x 91,8 mm




#### 70102.00

Maska 2M EXP BASIC,  
bela sa belim nosačem

*Cover frame 2M EXP BASIC,  
white with white holder*



97,6 x 91,8 mm

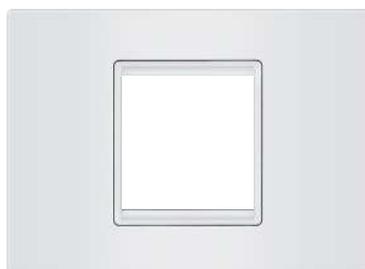


#### 70123.00

Maska 2/3M EXP BASIC,  
bela sa belim nosačem

*Cover frame 2/3M EXP BASIC,  
white with white holder*



120 x 91,8 mm

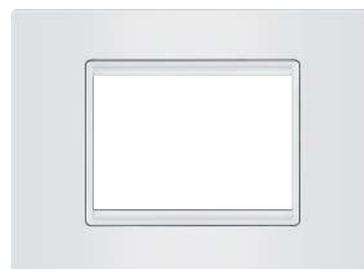


#### 70103.00

Maska 3M EXP BASIC,  
bela sa belim nosačem

*Cover frame 3M EXP BASIC,  
white with white holder*




120 x 91,8 mm

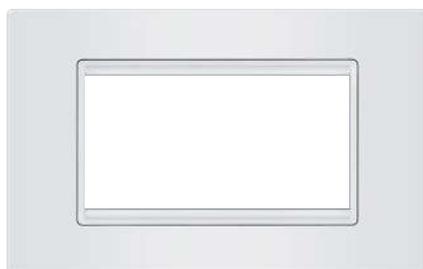

#### 70104.00

Maska 4M EXP BASIC,  
bela sa belim nosačem

*Cover frame 4M EXP BASIC,  
white with white holder*




142,4 x 91,8 mm



#### 70106.00

Maska 6M EXP BASIC,  
bela sa belim nosačem

*Cover frame 6M EXP BASIC,  
white with white holder*



187,2 x 91,8 mm




#### 70107.00

Maska 7M EXP BASIC,  
bela sa belim nosačem

*Cover frame 7M EXP BASIC,  
white with white holder*




209,6 x 91,8 mm

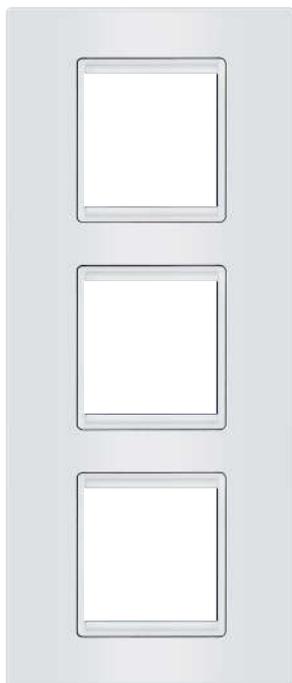


### 70162.00

Maska 3x2M EXP BASIC, vertikalna, bela sa belim nosačem

*Cover frame 3x2M EXP BASIC, vertical, white with white holder*




97,6 x 233,8 mm

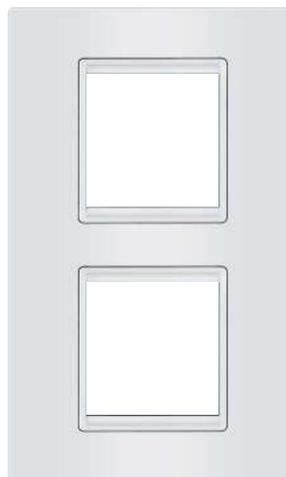


### 70142.00

Maska 2x2M EXP BASIC, vertikalna, bela sa belim nosačem

*Cover frame 2x2M EXP BASIC, vertical, white with white holder*




97,6 x 162,8 mm

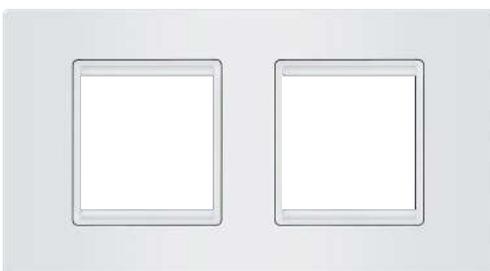


### 70122.00

Maska 2x2M EXP BASIC, horizontalna, bela sa belim nosačem

*Cover frame 2x2M EXP BASIC, horizontal, white with white holder*




168,6 x 91,8 mm

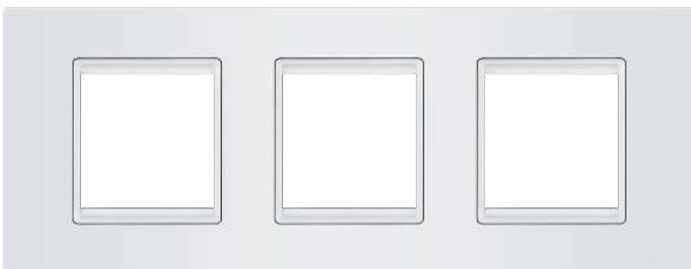


### 70132.00

Maska 3x2M EXP BASIC, horizontalna, bela sa belim nosačem

*Cover frame 3x2M EXP BASIC, horizontal, white with white holder*




239,6 x 91,8 mm

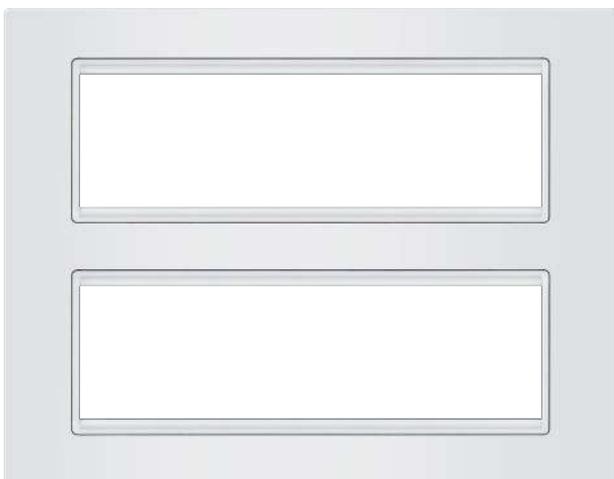

### 70127.00

Maska 2x7M EXP BASIC, bela sa belim nosačem

*Cover frame 2x7M EXP BASIC, white with white holder*



209,6 x 162,8 mm

# experience

## BASIC

### BELA MASKA / CRNI NOSAČ WHITE FRAME / BLACK HOLDER

- Ugradnja na noseću pribudnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;



#### 70101.0E

Maska 1M EXP BASIC,  
bela sa crnim nosačem

*Cover frame 1M EXP BASIC,  
white with black holder*



97,6 x 91,8 mm



#### 70102.0E

Maska 2M EXP BASIC,  
bela sa crnim nosačem

*Cover frame 2M EXP BASIC,  
white with black holder*



97,6 x 91,8 mm



#### 70123.0E

Maska 2/3M EXP BASIC,  
bela sa crnim nosačem

*Cover frame 2/3M EXP BASIC,  
white with black holder*




120 x 91,8 mm



#### 70103.0E

Maska 3M EXP BASIC,  
bela sa crnim nosačem

*Cover frame 3M EXP BASIC,  
white with black holder*




120 x 91,8 mm




#### 70104.0E

Maska 4M EXP BASIC,  
bela sa crnim nosačem

*Cover frame 4M EXP BASIC,  
white with black holder*



142,4 x 91,8 mm

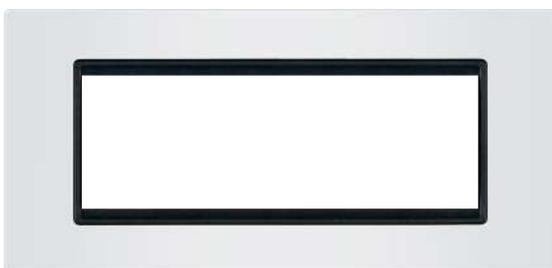

#### 70106.0E

Maska 6M EXP BASIC,  
bela sa crnim nosačem

*Cover frame 6M EXP BASIC,  
white with black holder*



187,2 x 91,8 mm




#### 70107.0E

Maska 7M EXP BASIC,  
bela sa crnim nosačem

*Cover frame 7M EXP BASIC,  
white with black holder*




209,6 x 91,8 mm

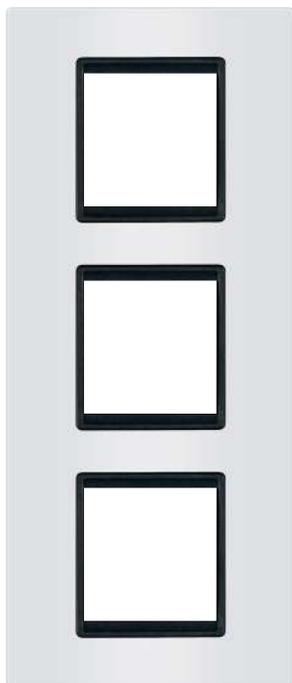


### 70162.0E

Maska 3x2M EXP BASIC, vertikalna, bela sa crnim nosačem

*Cover frame 3x2M EXP BASIC, vertical, white with black holder*




97,6 x 233,8 mm

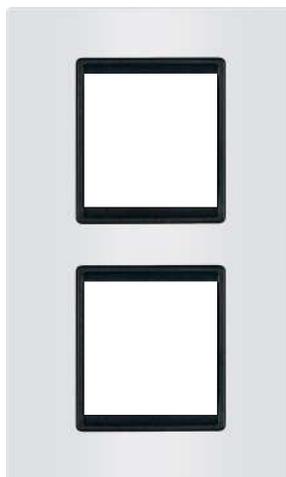


### 70142.0E

Maska 2x2M EXP BASIC, vertikalna, bela sa crnim nosačem

*Cover frame 2x2M EXP BASIC, vertical, white with black holder*



97,6 x 162,8 mm

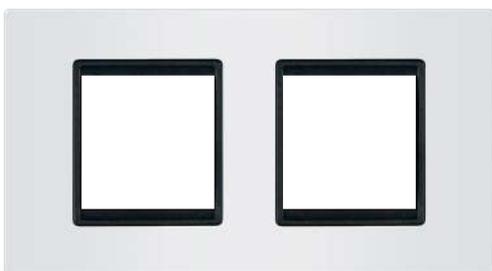


### 70122.0E

Maska 2x2M EXP BASIC, horizontalna, bela sa crnim nosačem

*Cover frame 2x2M EXP BASIC, horizontal, white with black holder*



168,6 x 91,8 mm

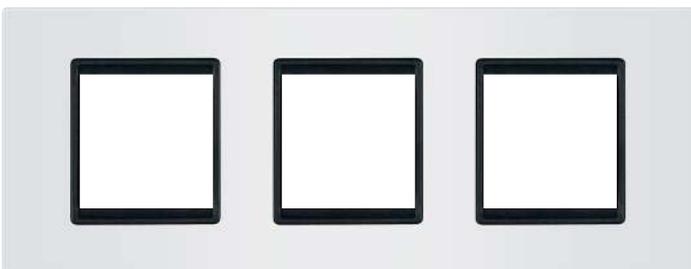


### 70132.0E

Maska 3x2M EXP BASIC, horizontalna, bela sa crnim nosačem

*Cover frame 3x2M EXP BASIC, horizontal, white with black holder*




239,6 x 91,8 mm

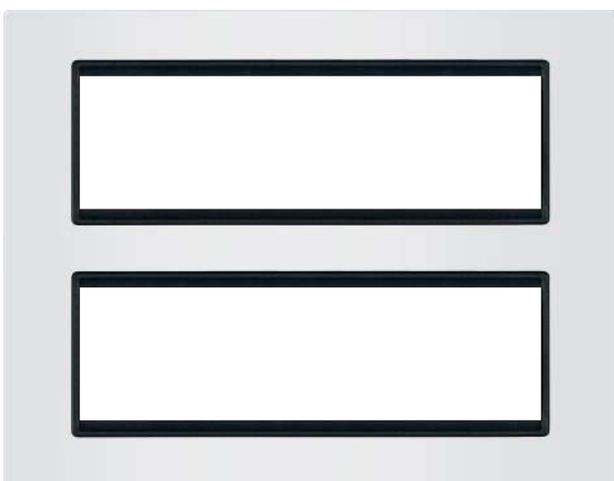

### 70127.0E

Maska 2x7M EXP BASIC, bela sa crnim nosačem

*Cover frame 2x7M EXP BASIC, white with black holder*




209,6 x 162,8 mm

# experience

## BASIC

### BELA MASKA / SILVER NOSAČ WHITE FRAME / SILVER HOLDER

- Ugradnja na noseću priрубnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;



#### 70101.0S

Maska 1M EXP BASIC,  
bela sa silver nosačem

*Cover frame 1M EXP BASIC,  
white with silver holder*



97,6 x 91,8 mm




#### 70102.0S

Maska 2M EXP BASIC,  
bela sa silver nosačem

*Cover frame 2M EXP BASIC,  
white with silver holder*



97,6 x 91,8 mm

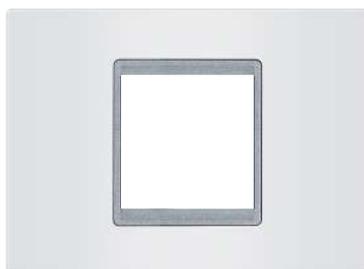

#### 70123.0S

Maska 2/3M EXP BASIC,  
bela sa silver nosačem

*Cover frame 2/3M EXP BASIC,  
white with silver holder*




120 x 91,8 mm




#### 70103.0S

Maska 3M EXP BASIC,  
bela sa silver nosačem

*Cover frame 3M EXP BASIC,  
white with silver holder*




120 x 91,8 mm

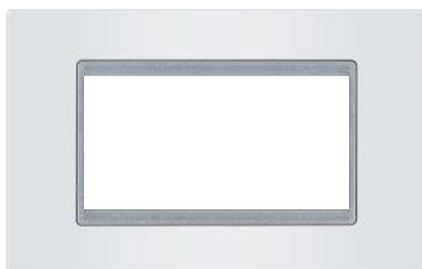


#### 70104.0S

Maska 4M EXP BASIC,  
bela sa silver nosačem

*Cover frame 4M EXP BASIC,  
white with silver holder*



142,4 x 91,8 mm

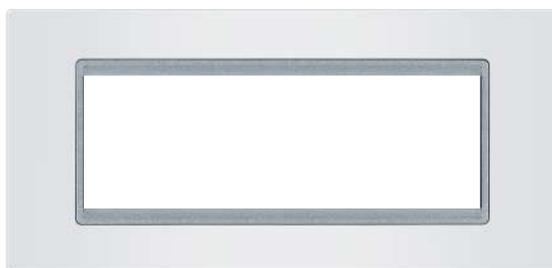

#### 70106.0S

Maska 6M EXP BASIC,  
bela sa silver nosačem

*Cover frame 6M EXP BASIC,  
white with silver holder*




187,2 x 91,8 mm




#### 70107.0S

Maska 7M EXP BASIC,  
bela sa silver nosačem

*Cover frame 7M EXP BASIC,  
white with silver holder*





209,6 x 91,8 mm

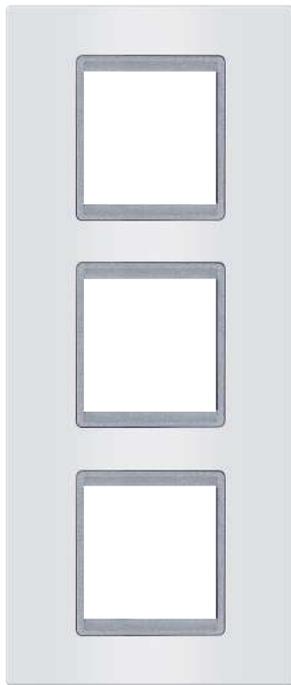

### 70162.0S

Maska 3x2M EXP BASIC, vertikalna, bela sa silver nosačem



*Cover frame 3x2M EXP BASIC, vertical, white with silver holder*

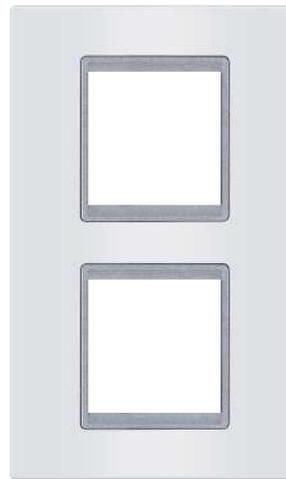

### 70142.0S

Maska 2x2M EXP BASIC, vertikalna, bela sa silver nosačem



*Cover frame 2x2M EXP BASIC, vertical, white with silver holder*

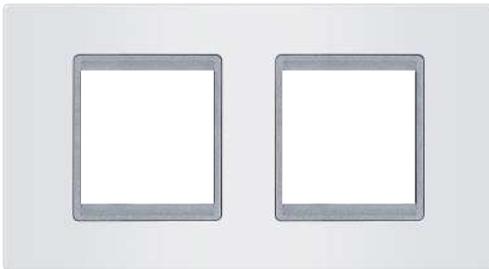

### 70122.0S

Maska 2x2M EXP BASIC, horizontalna, bela sa silver nosačem



*Cover frame 2x2M EXP BASIC, horizontal, white with silver holder*

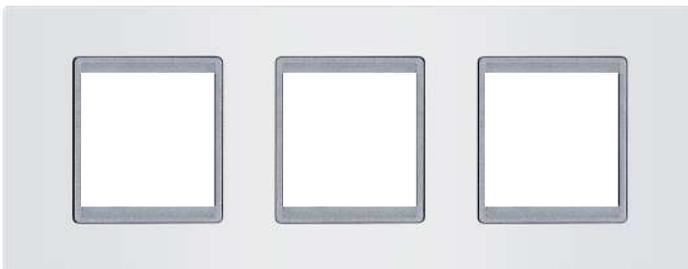

### 70132.0S

Maska 3x2M EXP BASIC, horizontalna, bela sa silver nosačem


*Cover frame 3x2M EXP BASIC, horizontal, white with silver holder*

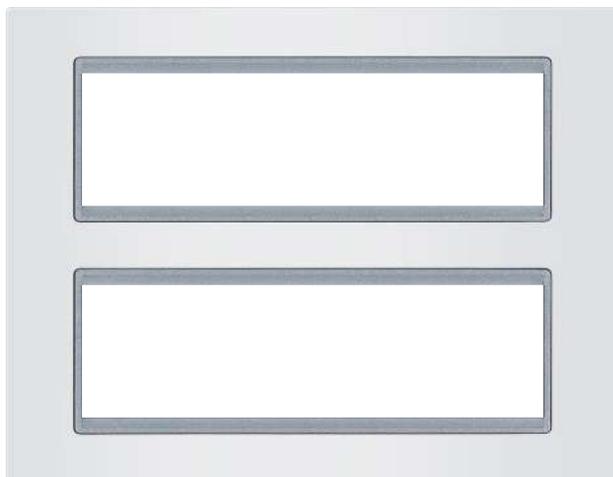

### 70127.0S

Maska 2x7M EXP BASIC, bela sa silver nosačem

*Cover frame 2x7M EXP BASIC, white with silver holder*





experience

**BASIC**  
**CRNA / BLACK**

Snaga crne boje ogleda se u smelim kombinacijama koje će Vašem prostoru dati dozu ekstravagancije

*Power of black reflects in daring combinations that will give your space a dose of extravagance*

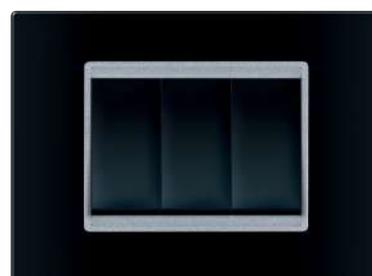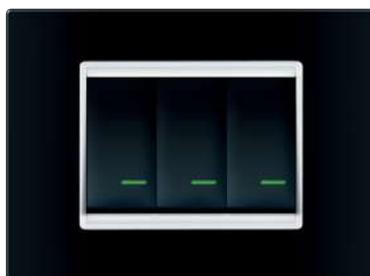



# experience

## BASIC

### CRNA MASKA / CRNI NOSAČ BLACK FRAME / BLACK HOLDER

- Ugradnja na noseću pribornicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;



#### 70101.EE

Maska 1M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 1M EXP BASIC,  
black with black holder*



97,6 x 91,8 mm



#### 70102.EE

Maska 2M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 2M EXP BASIC,  
black with black holder*




97,6 x 91,8 mm



#### 70123.EE

Maska 2/3M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 2/3M EXP BASIC,  
black with black holder*




120 x 91,8 mm



#### 70103.EE

Maska 3M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 3M EXP BASIC,  
black with black holder*




120 x 91,8 mm




#### 70104.EE

Maska 4M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 4M EXP BASIC,  
black with black holder*




142,4 x 91,8 mm

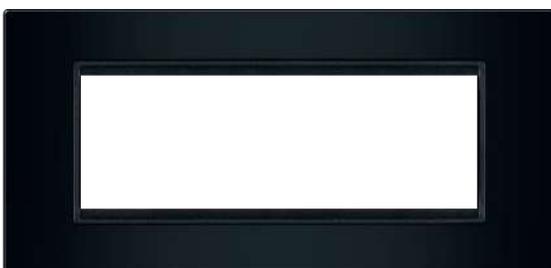


#### 70106.EE

Maska 6M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 6M EXP BASIC,  
black with black holder*



187,2 x 91,8 mm

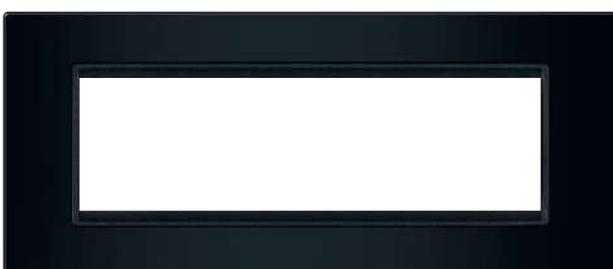

#### 70107.EE

Maska 7M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 7M EXP BASIC,  
black with black holder*




209,6 x 91,8 mm



### 70162.EE

Maska 3x2M EXP BASIC, vertikalna, crna sa crnim nosačem



*Cover frame 3x2M EXP BASIC, vertical, black with black holder*



### 70142.EE

Maska 2x2M EXP BASIC, vertikalna, crna sa crnim nosačem



*Cover frame 2x2M EXP BASIC, vertical, black with black holder*

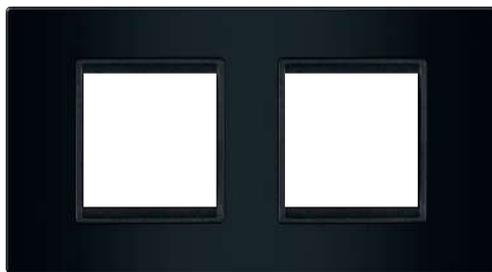

### 70122.EE

Maska 2x2M EXP BASIC, horizontalna, crna sa crnim nosačem



*Cover frame 2x2M EXP BASIC, horizontal, black with black holder*

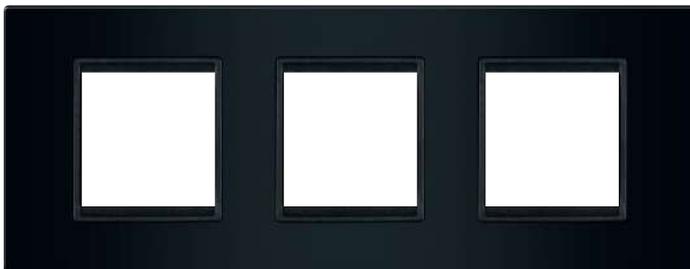

### 70132.EE

Maska 3x2M EXP BASIC, horizontalna, crna sa crnim nosačem


*Cover frame 3x2M EXP BASIC, horizontal, black with black holder*

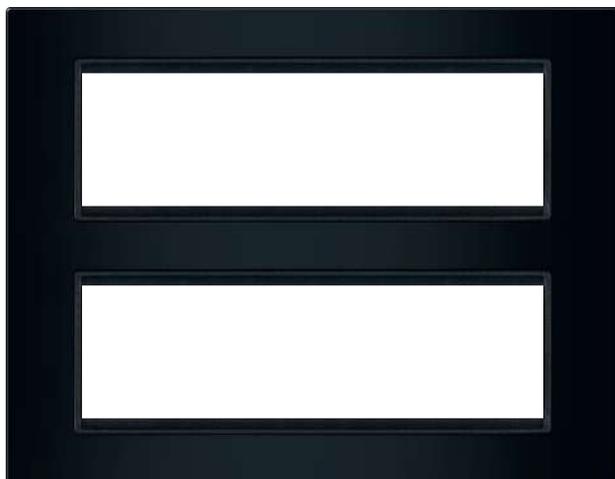

### 70127.EE

Maska 2x7M EXP BASIC, crna sa crnim nosačem

*Cover frame 2x7M EXP BASIC, black with black holder*

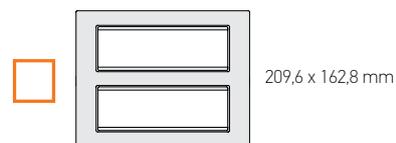

# experience

## BASIC

### CRNA MASKA / BELI NOSAČ BLACK FRAME / WHITE HOLDER

- Ugradnja na noseću pribornicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;




#### 70101.E0

Maska 1M EXP BASIC,  
crna sa belim nosačem

*Cover frame 1M EXP BASIC,  
black with white holder*



97,6 x 91,8 mm



#### 70102.E0

Maska 2M EXP BASIC,  
crna sa belim nosačem

*Cover frame 2M EXP BASIC,  
black with white holder*




97,6 x 91,8 mm



#### 70123.E0

Maska 2/3M EXP BASIC,  
crna sa belim nosačem

*Cover frame 2/3M EXP BASIC,  
black with white holder*




120 x 91,8 mm



#### 70103.E0

Maska 3M EXP BASIC,  
crna sa belim nosačem

*Cover frame 3M EXP BASIC,  
black with white holder*




120 x 91,8 mm



#### 70104.E0

Maska 4M EXP BASIC,  
crna sa belim nosačem

*Cover frame 4M EXP BASIC,  
black with white holder*




142,4 x 91,8 mm




#### 70106.E0

Maska 6M EXP BASIC,  
crna sa belim nosačem

*Cover frame 6M EXP BASIC,  
black with white holder*



187,2 x 91,8 mm

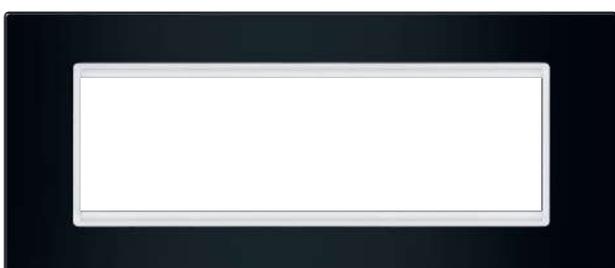


#### 70107.E0

Maska 7M EXP BASIC,  
crna sa belim nosačem

*Cover frame 7M EXP BASIC,  
black with white holder*





209,6 x 91,8 mm

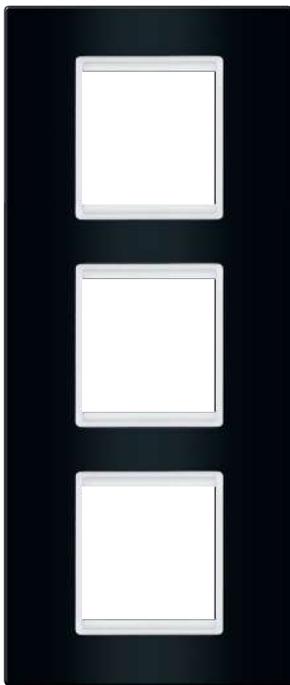

### 70162.E0

Maska 3x2M EXP  
BASIC, vertikalna,  
crna sa belim nosačem



*Cover frame 3x2M EXP  
BASIC, vertical,  
black with white holder*

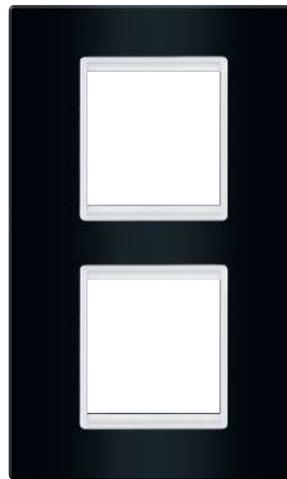

### 70142.E0

Maska 2x2M EXP  
BASIC, vertikalna,  
crna sa belim nosačem



*Cover frame 2x2M EXP  
BASIC, vertical,  
black with white holder*

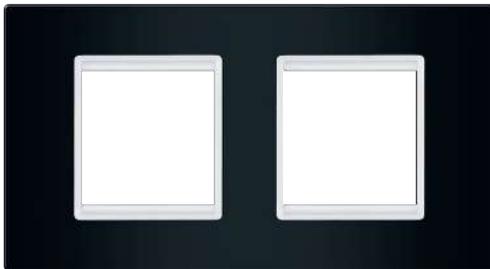

### 70122.E0

Maska 2x2M EXP BASIC,  
horizontalna, crna sa belim nosačem



*Cover frame 2x2M EXP BASIC,  
horizontal, black with white holder*

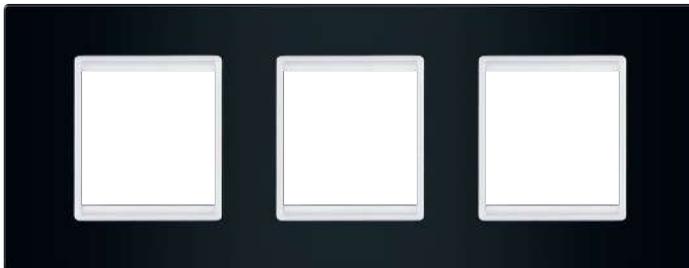

### 70132.E0

Maska 3x2M EXP BASIC,  
horizontalna, crna sa belim nosačem


*Cover frame 3x2M EXP BASIC,  
horizontal, black with white holder*

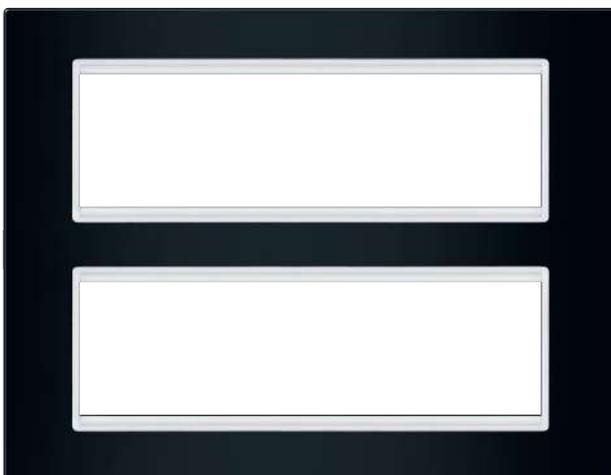

### 70127.E0

Maska 2x7M EXP BASIC,  
crna sa belim nosačem

*Cover frame 2x7M EXP BASIC,  
black with white holder*

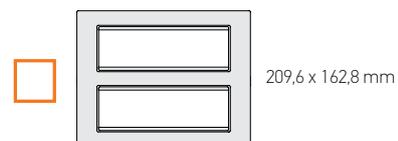

# experience

## BASIC

### CRNA MASKA / SILVER NOSAČ BLACK FRAME / SILVER HOLDER

- Ugradnja na noseću pribornicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;




#### 70101.ES

Maska 1M EXP BASIC,  
crna sa silver nosačem

*Cover frame 1M EXP BASIC,  
black with silver holder*



97,6 x 91,8 mm



#### 70102.ES

Maska 2M EXP BASIC,  
crna sa silver nosačem

*Cover frame 2M EXP BASIC,  
black with silver holder*



97,6 x 91,8 mm



#### 70123.ES

Maska 2/3M EXP BASIC,  
crna sa silver nosačem

*Cover frame 2/3M EXP BASIC,  
black with silver holder*



120 x 91,8 mm




#### 70103.ES

Maska 3M EXP BASIC,  
crna sa silver nosačem

*Cover frame 3M EXP BASIC,  
black with silver holder*



120 x 91,8 mm

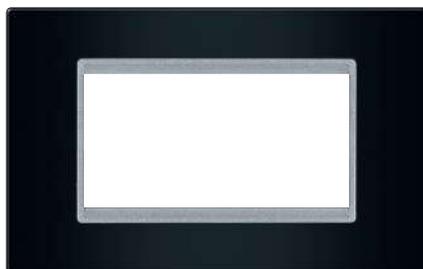


#### 70104.ES

Maska 4M EXP BASIC,  
crna sa silver nosačem

*Cover frame 4M EXP BASIC,  
black with silver holder*



142,4 x 91,8 mm

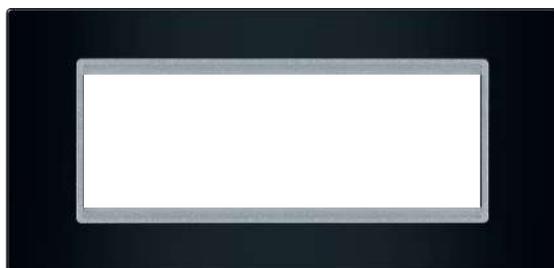


#### 70106.ES

Maska 6M EXP BASIC,  
crna sa silver nosačem

*Cover frame 6M EXP BASIC,  
black with silver holder*



187,2 x 91,8 mm

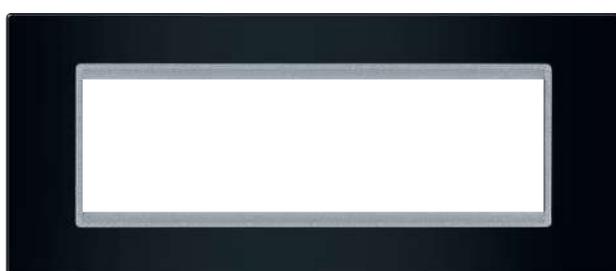


#### 70107.ES

Maska 7M EXP BASIC,  
crna sa silver nosačem

*Cover frame 7M EXP BASIC,  
black with silver holder*





209,6 x 91,8 mm

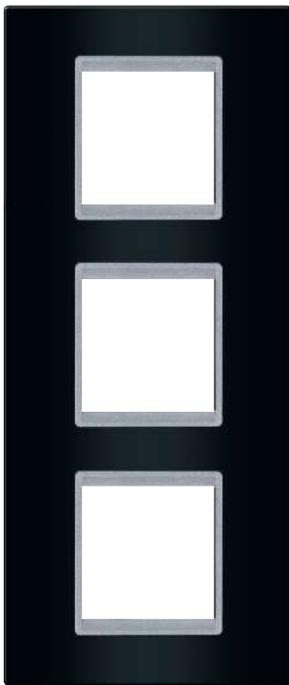

### 70162.ES

Maska 3x2M EXP  
BASIC, vertikalna,  
crna sa silver nosačem



*Cover frame 3x2M EXP  
BASIC, vertical,  
black with silver holder*

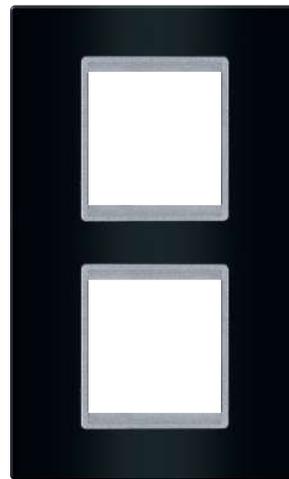

### 70142.ES

Maska 2x2M EXP  
BASIC, vertikalna,  
crna sa silver nosačem


*Cover frame 2x2M EXP  
BASIC, vertical,  
black with silver holder*

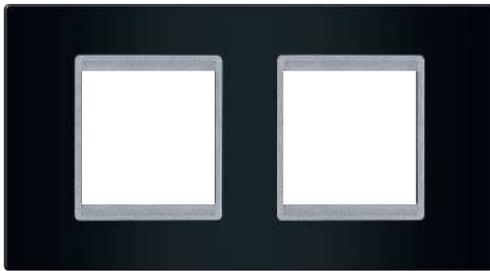

### 70122.ES

Maska 2x2M EXP BASIC,  
horizontalna, crna sa silver nosačem



*Cover frame 2x2M EXP BASIC,  
horizontal, black with silver holder*



### 70132.ES

Maska 3x2M EXP BASIC,  
horizontalna, crna sa silver nosačem


*Cover frame 3x2M EXP BASIC,  
horizontal, black with silver holder*

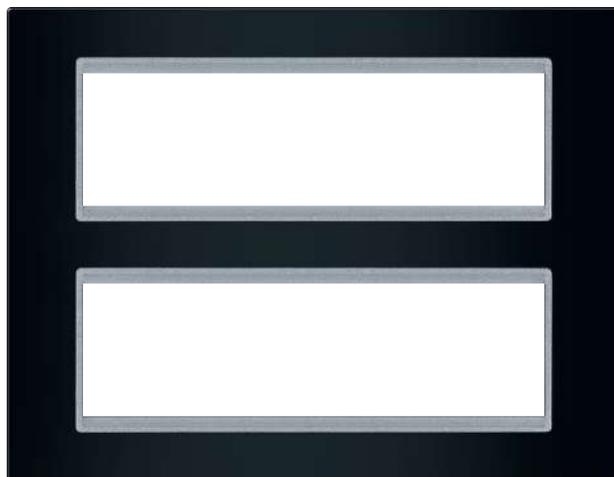

### 70127.ES

Maska 2x7M EXP BASIC,  
crna sa silver nosačem

*Cover frame 2x7M EXP BASIC,  
black with silver holder*






experience

**BASIC**  
**SILVER / SILVER**

Srebrna tekstura za moderne  
enterijere i kao modni dodatak  
na Vašem zidu

*Silver texture for modern interiors  
and as a fashion accessory  
to your wall*

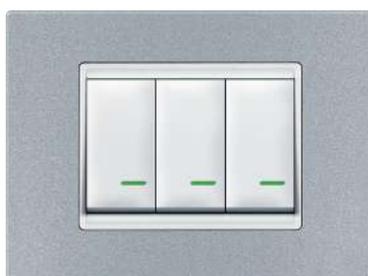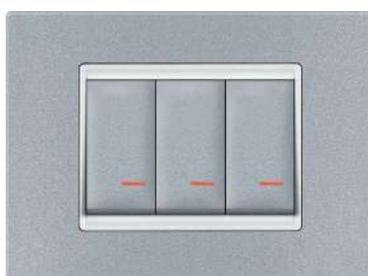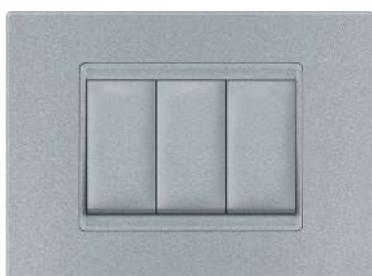




# experience

## BASIC

### SILVER MASKA / SILVER NOSAČ SILVER FRAME / SILVER HOLDER


- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;



#### 70101.SS

Maska 1M EXP BASIC,  
silver sa silver nosačem


*Cover frame 1M EXP BASIC,  
silver with silver holder*



#### 70102.SS

Maska 2M EXP BASIC,  
silver sa silver nosačem


*Cover frame 2M EXP BASIC,  
silver with silver holder*

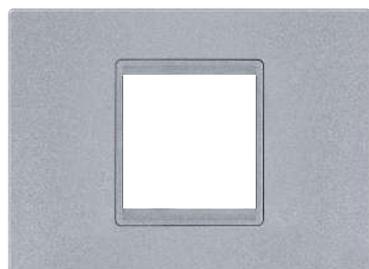

#### 70123.SS

Maska 2/3M EXP BASIC,  
silver sa silver nosačem


*Cover frame 2/3M EXP BASIC,  
silver with silver holder*

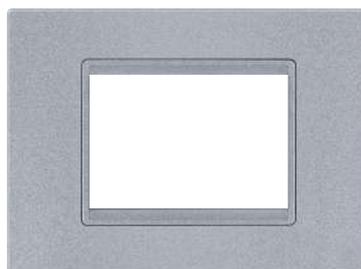

#### 70103.SS

Maska 3M EXP BASIC,  
silver sa silver nosačem

*Cover frame 3M EXP BASIC,  
silver with silver holder*

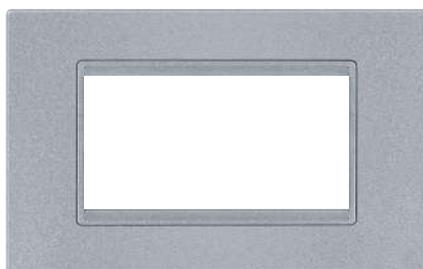

#### 70104.SS

Maska 4M EXP BASIC,  
silver sa silver nosačem


*Cover frame 4M EXP BASIC,  
silver with silver holder*



#### 70106.SS

Maska 6M EXP BASIC,  
silver sa silver nosačem

*Cover frame 6M EXP BASIC,  
silver with silver holder*

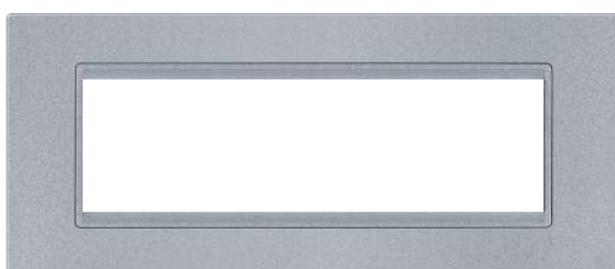


#### 70107.SS

Maska 7M EXP BASIC,  
silver sa silver nosačem

*Cover frame 7M EXP BASIC,  
silver with silver holder*




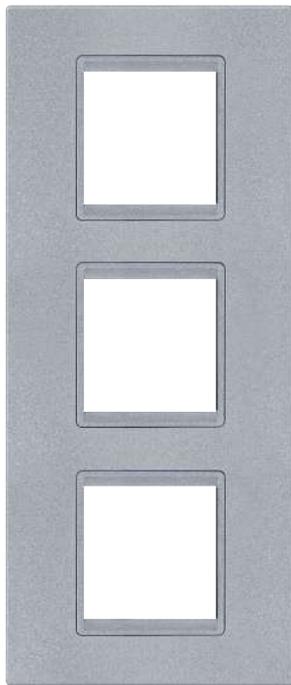


### 70162.SS

Maska 3x2M EXP BASIC, vertikalna, silver sa silver nosačem

*Cover frame 3x2M EXP BASIC, vertical, silver with silver holder*




97,6 x 233,8 mm

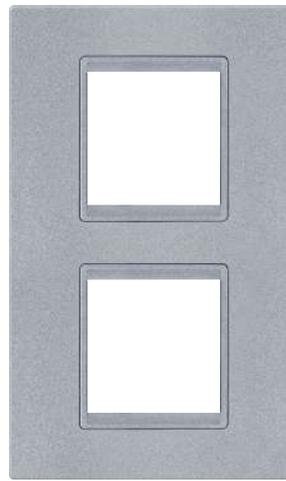


### 70142.SS

Maska 2x2M EXP BASIC, vertikalna, silver sa silver nosačem

*Cover frame 2x2M EXP BASIC, vertical, silver with silver holder*




97,6 x 162,8 mm

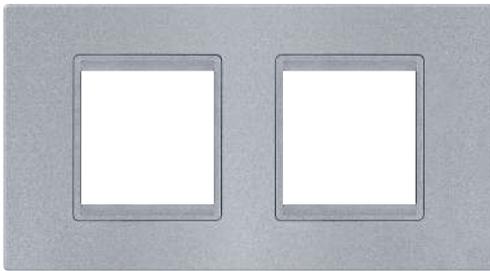


### 70122.SS

Maska 2x2M EXP BASIC, horizontalna, silver sa silver nosačem

*Cover frame 2x2M EXP BASIC, horizontal, silver with silver holder*




168,6 x 91,8 mm

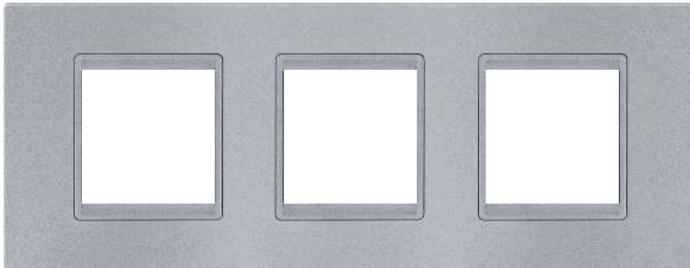


### 70132.SS

Maska 3x2M EXP BASIC, horizontalna, silver sa silver nosačem

*Cover frame 3x2M EXP BASIC, horizontal, silver with silver holder*




239,6 x 91,8 mm

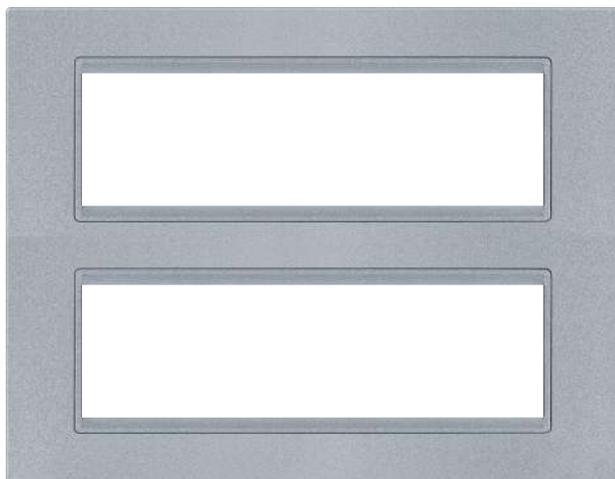

### 70127.SS

Maska 2x7M EXP BASIC, silver sa silver nosačem

*Cover frame 2x7M EXP BASIC, silver with silver holder*




209,6 x 162,8 mm

# experience

## BASIC

### SILVER MASKA / BELI NOSAČ SILVER FRAME / WHITE HOLDER

- Ugradnja na noseću priрубnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;




#### 70101.S0

Maska 1M EXP BASIC,  
silver sa belim nosačem

*Cover frame 1M EXP BASIC,  
silver with white holder*



97,6 x 91,8 mm




#### 70102.S0

Maska 2M EXP BASIC,  
silver sa belim nosačem

*Cover frame 2M EXP BASIC,  
silver with white holder*



97,6 x 91,8 mm

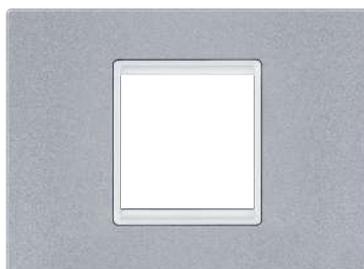


#### 70123.S0

Maska 2/3M EXP BASIC,  
silver sa belim nosačem

*Cover frame 2/3M EXP BASIC,  
silver with white holder*




120 x 91,8 mm

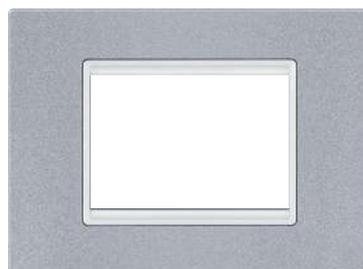


#### 70103.S0

Maska 3M EXP BASIC,  
silver sa belim nosačem

*Cover frame 3M EXP BASIC,  
silver with white holder*




120 x 91,8 mm

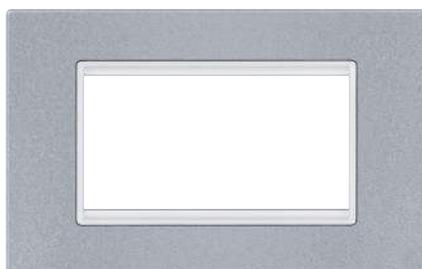

#### 70104.S0

Maska 4M EXP BASIC,  
silver sa belim nosačem

*Cover frame 4M EXP BASIC,  
silver with white holder*




142,4 x 91,8 mm



#### 70106.S0

Maska 6M EXP BASIC,  
silver sa belim nosačem

*Cover frame 6M EXP BASIC,  
silver with white holder*




187,2 x 91,8 mm




#### 70107.S0

Maska 7M EXP BASIC,  
silver sa belim nosačem

*Cover frame 7M EXP BASIC,  
silver with white holder*





209,6 x 91,8 mm

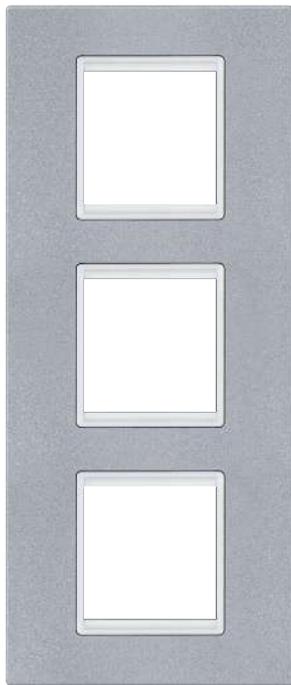

### 70162.S0

Maska 3x2M EXP BASIC, vertikalna, silver sa belim nosačem



*Cover frame 3x2M EXP BASIC, vertical, silver with white holder*

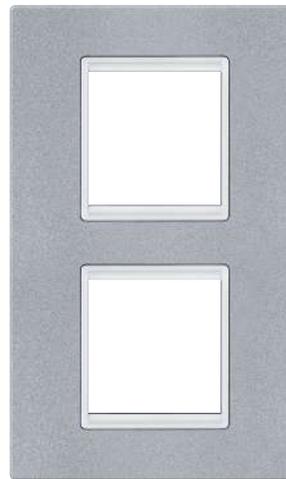

### 70142.S0

Maska 2x2M EXP BASIC, vertikalna, silver sa belim nosačem



*Cover frame 2x2M EXP BASIC, vertical, silver with white holder*

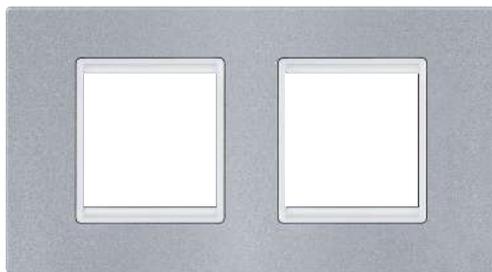

### 70122.S0

Maska 2x2M EXP BASIC, horizontalna, silver sa belim nosačem



*Cover frame 2x2M EXP BASIC, horizontal, silver with white holder*

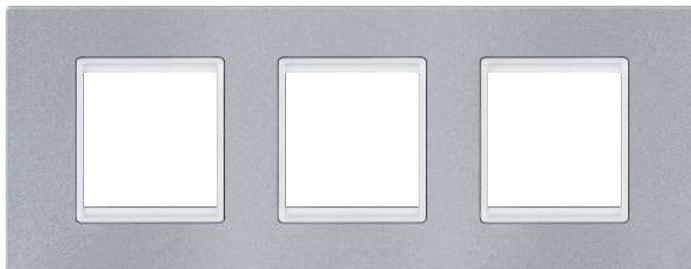

### 70132.S0

Maska 3x2M EXP BASIC, horizontalna, silver sa belim nosačem


*Cover frame 3x2M EXP BASIC, horizontal, silver with white holder*

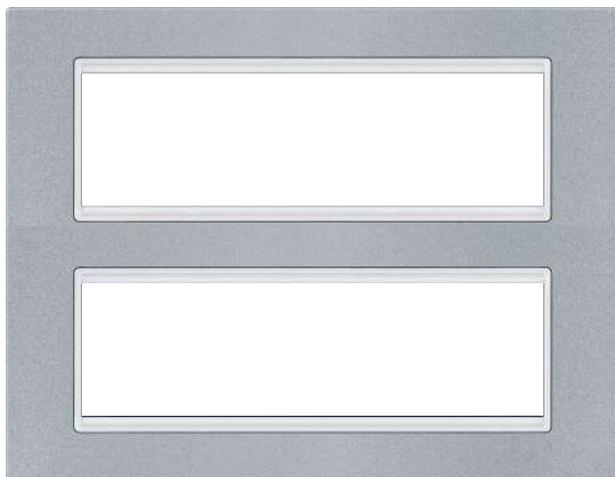

### 70127.S0

Maska 2x7M EXP BASIC, silver sa belim nosačem

*Cover frame 2x7M EXP BASIC, silver with white holder*



# experience

## BASIC

### SILVER MASKA / CRNI NOSAČ SILVER FRAME / BLACK HOLDER

- Ugradnja na noseću priрубnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;



#### 70101.SE

Maska 1M EXP BASIC,  
silver sa crnim nosačem

*Cover frame 1M EXP BASIC,  
silver with black holder*



97,6 x 91,8 mm




#### 70102.SE

Maska 2M EXP BASIC,  
silver sa crnim nosačem

*Cover frame 2M EXP BASIC,  
silver with black holder*



97,6 x 91,8 mm

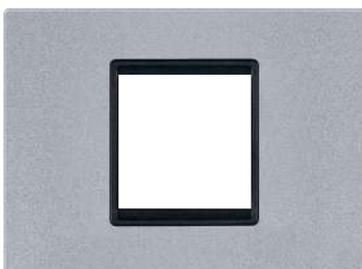


#### 70123.SE

Maska 2/3M EXP BASIC,  
silver sa crnim nosačem

*Cover frame 2/3M EXP BASIC,  
silver with black holder*




120 x 91,8 mm

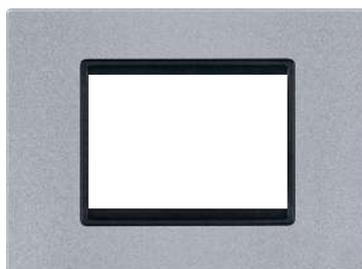

#### 70103.SE

Maska 3M EXP BASIC,  
silver sa crnim nosačem

*Cover frame 3M EXP BASIC,  
silver with black holder*




120 x 91,8 mm



#### 70104.SE

Maska 4M EXP BASIC,  
silver sa crnim nosačem

*Cover frame 4M EXP BASIC,  
silver with black holder*




142,4 x 91,8 mm




#### 70106.SE

Maska 6M EXP BASIC,  
silver sa crnim nosačem

*Cover frame 6M EXP BASIC,  
silver with black holder*




187,2 x 91,8 mm

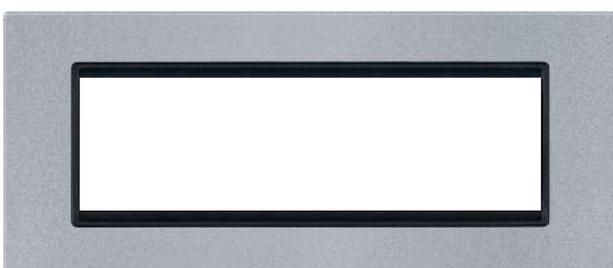


#### 70107.SE

Maska 7M EXP BASIC,  
silver sa crnim nosačem

*Cover frame 7M EXP BASIC,  
silver with black holder*




209,6 x 91,8 mm

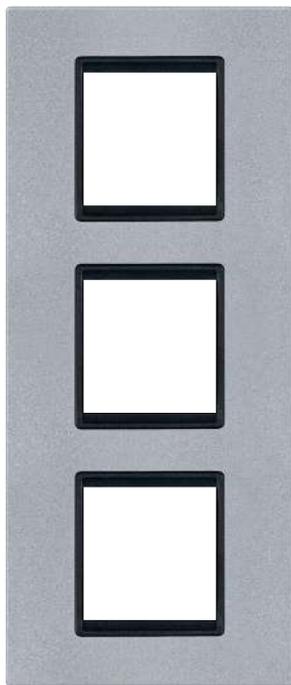


### 70162.SE

Maska 3x2M EXP BASIC, vertikalna, silver sa crnim nosačem

*Cover frame 3x2M EXP BASIC, vertical, silver with black holder*




97,6 x 233,8 mm

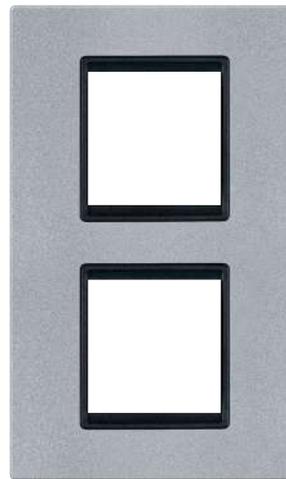


### 70142.SE

Maska 2x2M EXP BASIC, vertikalna, silver sa crnim nosačem

*Cover frame 2x2M EXP BASIC, vertical, silver with black holder*




97,6 x 162,8 mm

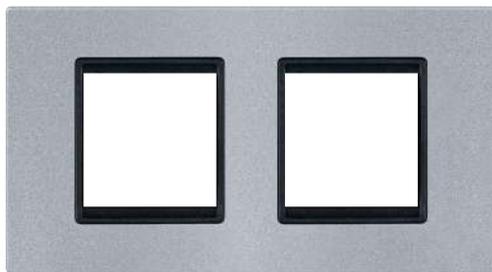


### 70122.SE

Maska 2x2M EXP BASIC, horizontalna, silver sa crnim nosačem

*Cover frame 2x2M EXP BASIC, horizontal, silver with black holder*




168,6 x 91,8 mm

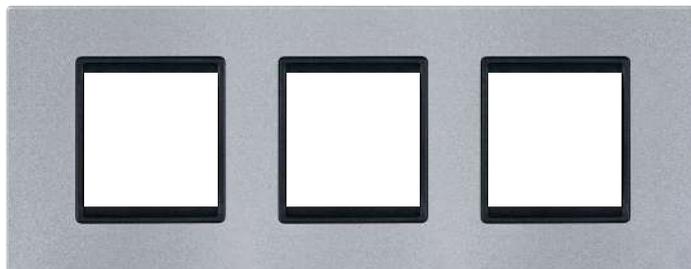


### 70132.SE

Maska 3x2M EXP BASIC, horizontalna, silver sa crnim nosačem

*Cover frame 3x2M EXP BASIC, horizontal, silver with black holder*




239,6 x 91,8 mm

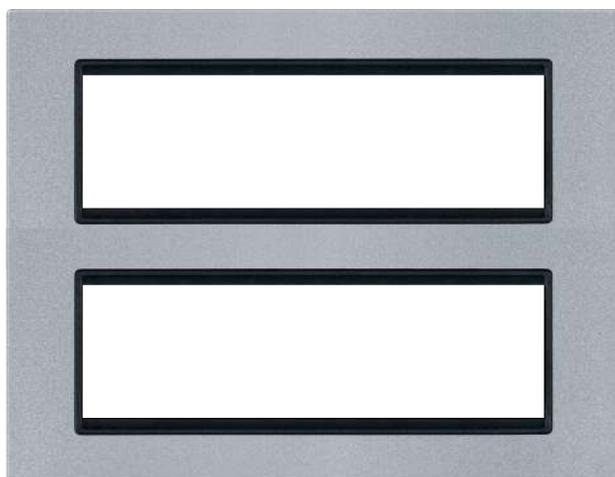




### 70127.SE

Maska 2x7M EXP BASIC, silver sa crnim nosačem

*Cover frame 2x7M EXP BASIC, silver with black holder*




209,6 x 162,8 mm

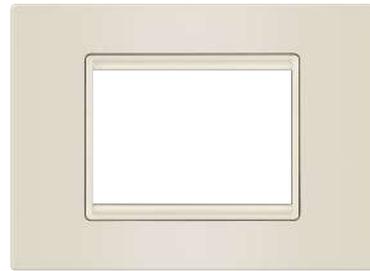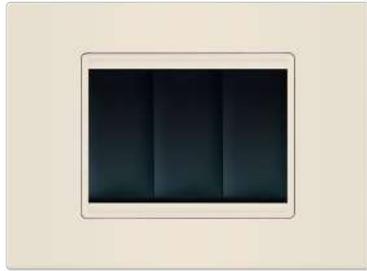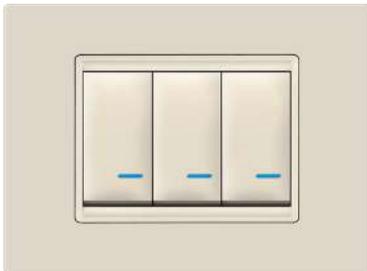



**x = 99**  
Krem/Krem  
*Beige/Beige*





**x = 9**  
Krem  
*Beige*

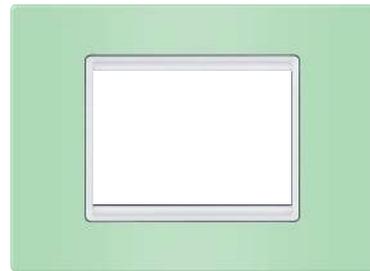

**x = 7**  
Pastel zelena  
*Pastel green*

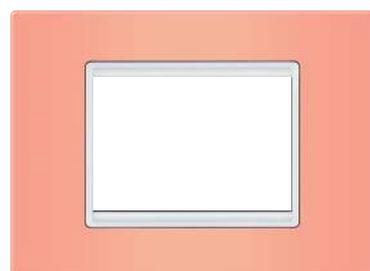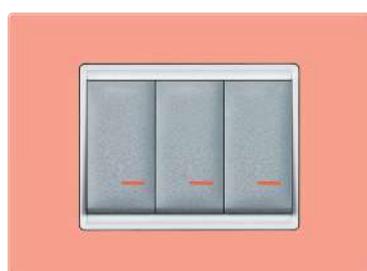

**x = N**  
Pastel narandžasta  
*Pastel orange*

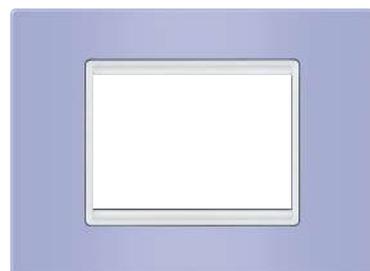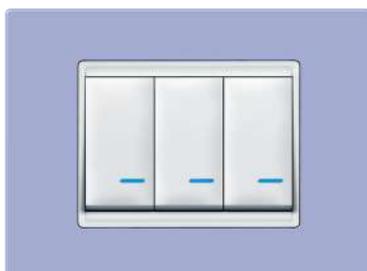



**x = V**  
Lavanda  
*Lavander*

experience

Razigrani kolorit u jasnim formama  
pruža veliki broj kombinacija boja

*Playfull coloring in clear forms  
provides a variety of combinations  
of design*

COLOR  
VIVID

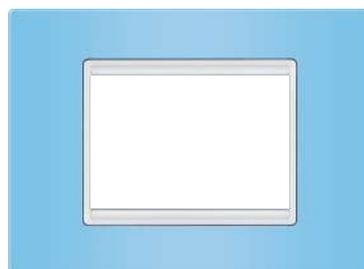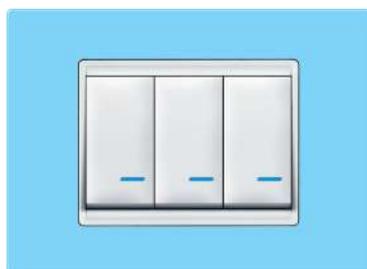

**x = 5**  
Pastel plava  
Pastel blue



**x = 2**  
Grafit  
Graphite




**x = 4**  
Crvena  
Red




**1M**  
70201.x




**2M**  
70202.x



**2/3M**  
70223.x




**3M**  
70203.x




**2x2M**  
70242.x




**3x2M**  
70262.x



**2x2M**  
70222.x



**3x2M**  
70232.x




**4M**  
70204.x



**6M**  
70206.x




**7M**  
70207.x




**2x7M**  
70227.x





**x = G2**  
Brušeni niki  
*Brushed nickel*

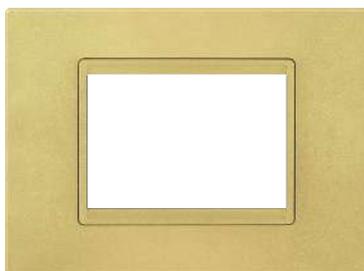


**x = G1**  
Zlatna sjaj  
*Shiny gold*

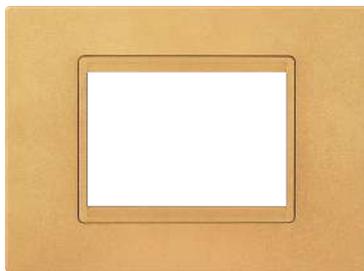

**x = G**  
Zlatna  
*Gold*


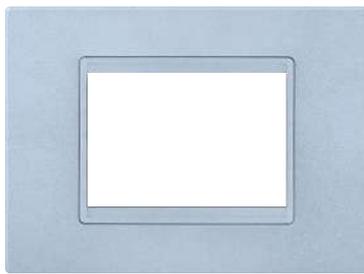
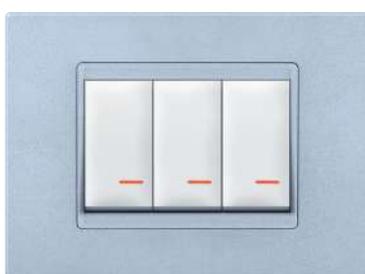


**x = U**  
Aluminijum  
*Aluminium*

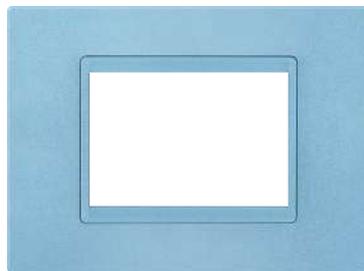


**x = P**  
Plava metalik  
*Blue metallic*


## COLOR METALLIC

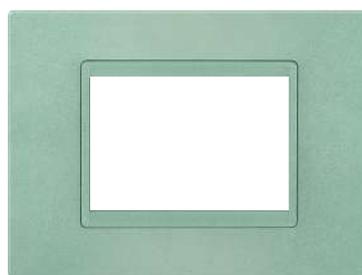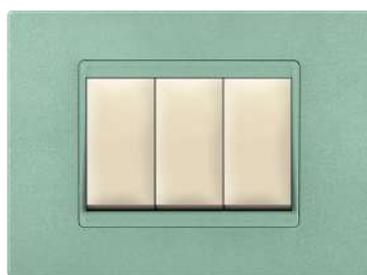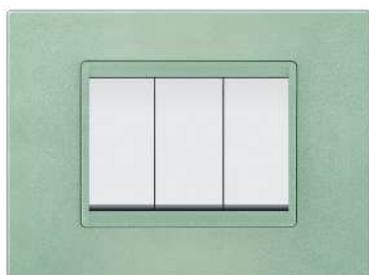

**x = Z**  
Zelena metalik  
*Green metallic*

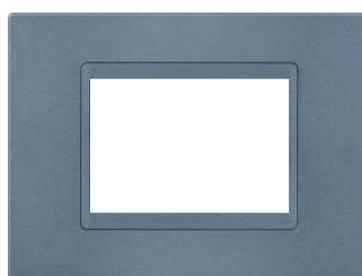

**x = S1**  
Antik silver  
*Antique silver*

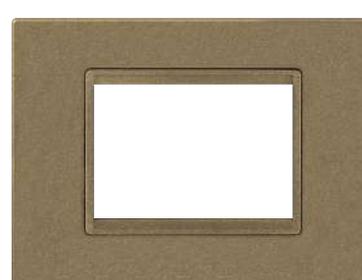


**x = B1**  
Tobacco braon  
*Tobacco brown*




**1M**  
70301.x




**2M**  
70302.x



**2/3M**  
70323.x




**3M**  
70303.x




**2x2M**  
70342.x




**3x2M**  
70362.x



**2x2M**  
70322.x



**3x2M**  
70332.x




**4M**  
70304.x




**6M**  
70306.x



**7M**  
70307.x



**2x7M**  
70327.x

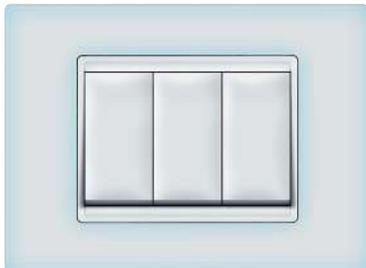

## LEPOTA SKRIVENA U DODIRU

Nova linija maski programa Experience budi u korisniku još jedno čulo: čulo dodira.

Mekana, nežna površina - specifičnost koja naglašava sofisticirani izgled.

Maske soft touch proizvode se u dve osnovne boje: crnoj i beloj (sky blue).

Novina se ogleda u beloj masci koja samo u mraku svetli plavičastim svetlom, pa otuda i naziv sky blue.

## BEAUTY HIDDEN IN TOUCH

*New line of frames arouses in user a new feeling: a sense of touch.*

*Soft, tender surface - a distinctive feature that highlights a sophisticated look.*



*Soft touch frames are produced in two basic colors: black and white (sky blue).*

*Originality is reflected in the white frame that glows in the dark by bluish light, hence the name is sky blue.*

Kada se svetlo ugasi soft touch sky blue uvodi Vas u novi svet dekorativnih maski

*When the light is off, sky blue soft touch brings you into the new world of decorative frames*

## COLOR SOFT TOUCH

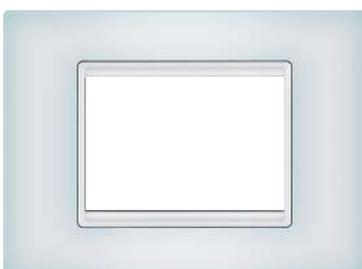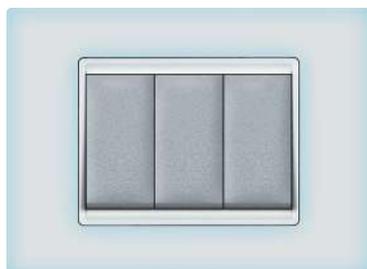


**x = K1**

Sky blue  
Sky blue



**x = E1**

Crna soft  
Soft black

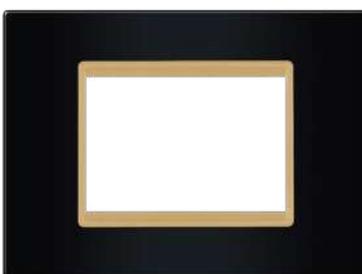

**x = E1G**


Crna soft sa zlatnim  
nosačem  
Soft black with gold  
interframe




**1M**  
70401.x




**2M**  
70402.x



**2/3M**  
70423.x



**3M**  
70403.x




**4M**  
70404.x



**6M**  
70406.x



**7M**  
70407.x



**2x7M**  
70427.x



## DOZA RUSTIČNOSTI U VAŠEM DOMU

Dekoratívne maske od punog drveta daju prostoru zemljani, prirodan izgled.

Ono što ih čini jedinstvenim su karakteristike i šare samog drveta od kojeg su izradene.

## A DOSE OF RUSTICITY AT YOUR HOME

*Decorative cover masks made of solid wood are bringing the living area earthy, natural look.*

*What make them unique are characteristics and patterns of the wood they are made of.*

experience

## EXCLUSIVE WOOD

Četiri elegantne vrste za  
tradicionalne prostore i korisnike  
koji uživaju u toplini punog drveta

*Four elegant woods  
for traditional spaces and users  
that enjoys the warmth of solid wood*



**x = J**

Javor  
Maple



**x = Y**

Trešnja  
Cherry



**x = W**

Wenge  
Wenge



**x = R**


Orah  
Nut




**2M**  
70502.x




**3M**  
70503.x






**4M**  
70504.x




**7M**  
70507.x

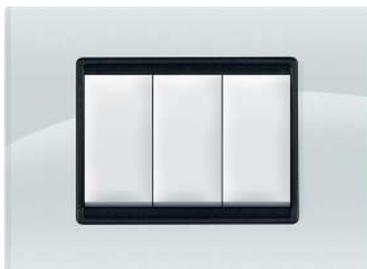

**x = 0**  
 Kristal bela  
*Chystal white*

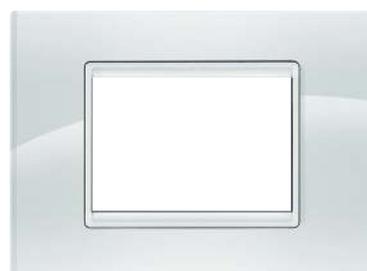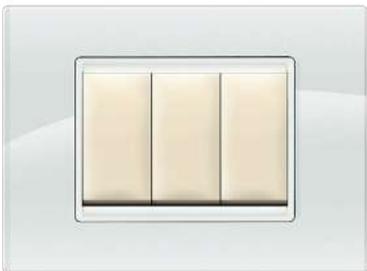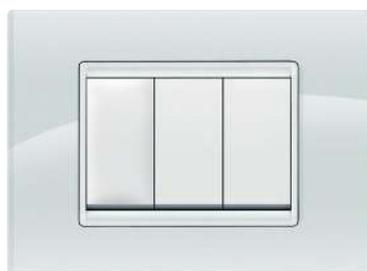

**x = 00**  
 Kristal  
 bela  
 sa belim  
 nosačem  
*Chystal  
 white  
 with  
 white  
 holder*

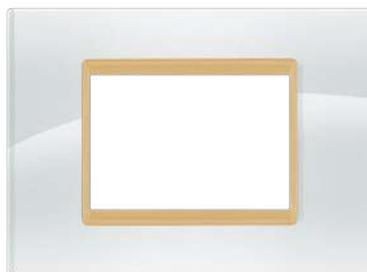

**x = 0G**  
 Kristal bela  
 sa zlatnim  
 nosačem  
*Chystal white  
 with  
 gold holder*



**x = 7**  
 Koral  
*Coral*

**ČISTO I  
 SENZUALNO...  
 EKSTRAVAGANTNO  
 I SJAJNO...**

Staklo je jedan od osnovnih materijala u našim životnim prostorima već nekoliko vekova i sve do današnjih dana sve više pronalazi svoje mesto u dizajnu enterijera.

**PURE AND  
 SENSUAL...  
 EXTRAVAGANT  
 AND SHINY...**




*Glass is one of the basic materials i n our living spaces for several centuries and until today more and more finds its place in interior design.*

experience



## EXCLUSIVE GLASS

Osvojiće svaki prostor koji prati najnovije trendove u dizajnu enterijera



*Fulfill every space that follows the latest trends in interior design*

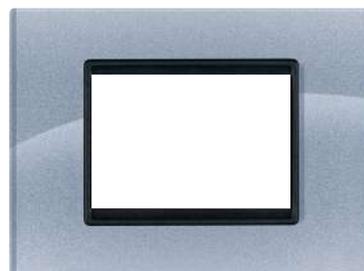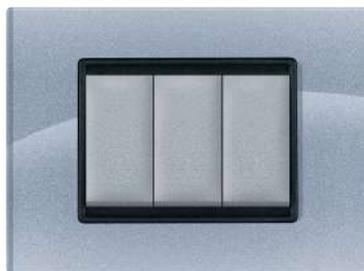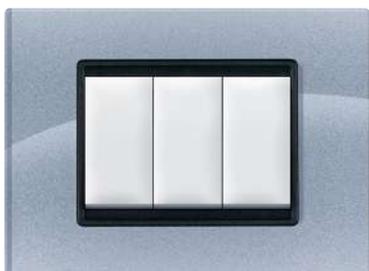

**x = S**  
Ice silver  
*Ice silver*

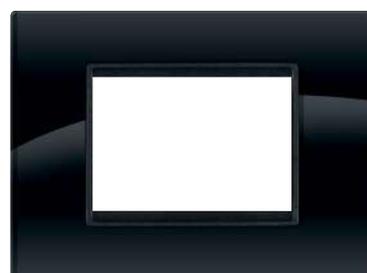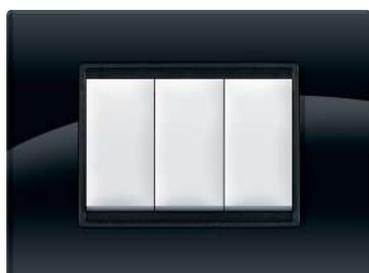

**x = E**  
Kristal crna  
*Crystal black*

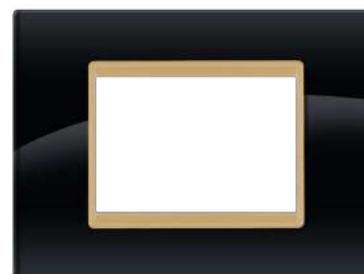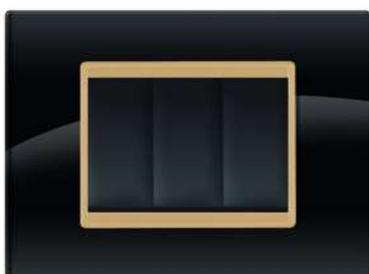


**x = EG**  
Kristal crna sa zlatnim nosačem  
*Chystal black with gold holder*



**2M**  
**70602.x**



**3M**  
**70603.x**



**4M**  
**70604.x**



**7M**  
**70607.x**



## IZVANREDAN... JASAN... TRAJAN... PLEMENIT... METAL

Exclusive linija programa Experience obogaćena je još jednim prirodnim materijalom – metalom.

Metal kao materijal budi u korisniku osećaj trajnosti i robusnosti.

Metal kao detalj na zidu oslikava karakter vlasnika i zasigurno budi pažnju posmatrača.

U kombinaciji sa jasnim geometrijskim linijama i grubim površinama dekorativne maske od metala lako su uklopive u rustične, ali i u ultra moderne domove.

## OUTSTANDING... CLEAR... DURABLE... NOBLE... METAL

*Exclusive line in Experience is enriched with another natural material - metal.*

*Metal as a material arouse in user a sense of durability and robustness.*

*Metal as a detail on the wall reflects the character of owners and certainly awakes the attention of viewer.*

*In combination with clear geometric lines and rough surfaces metal covering masks are easy fitting in rustic and in ultra modern homes.*

experience

Moć livenog metala pretočena  
u eleganciju za jedinstvene prostore


*Distinctive materials  
for unique spaces*

## EXCLUSIVE METAL



**x = Q**

Titanijum  
*Titanium*

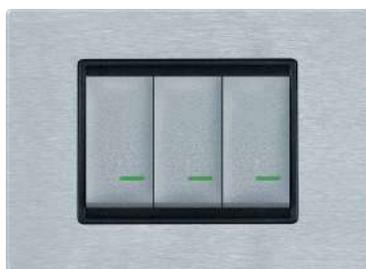

**x = U**

Aluminijum  
*Aluminum*



**x = A1**

Antracit kristal  
*Anthracite crystal*



**x = C1**


Bakar patina  
*Copper patina*




**2M**  
70702.x



**3M**  
70703.x



**4M**  
70704.x












**7M**  
70707.x

UGRADNJA  
INSTALLATION

- Montažne kutije Ø60  
• Installation boxes Ø60

- Montažne kutije za modularni program  
• Installation boxes for modular program

			 <p><b>1M</b></p>
			 <p><b>2M</b></p>
			 <p><b>2/3M</b></p>
			
			 <p><b>3M</b></p>
			 <p><b>4M</b></p>
			 <p><b>6M</b></p>

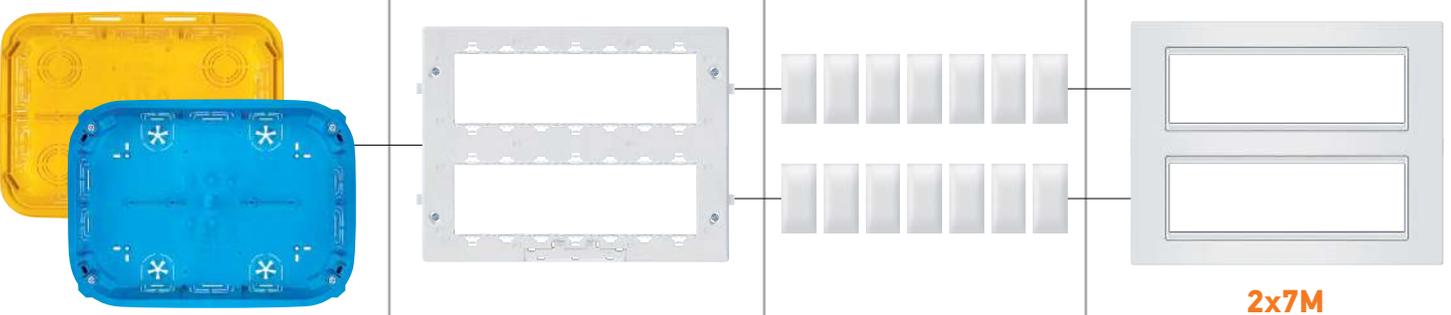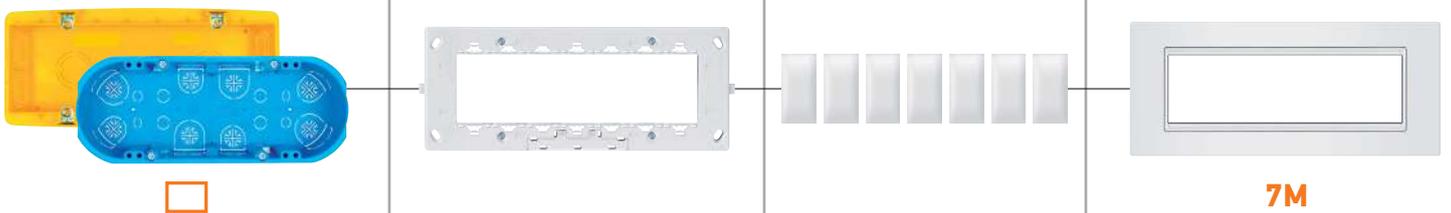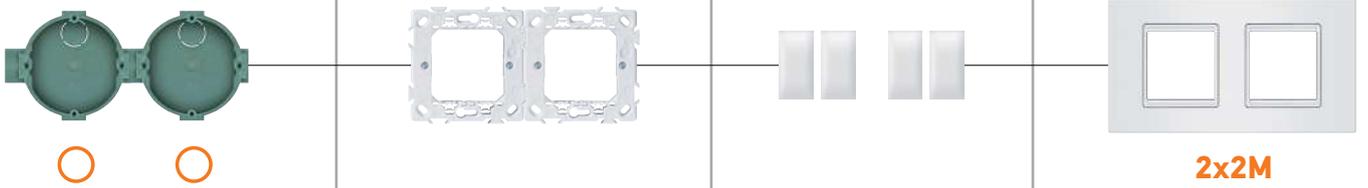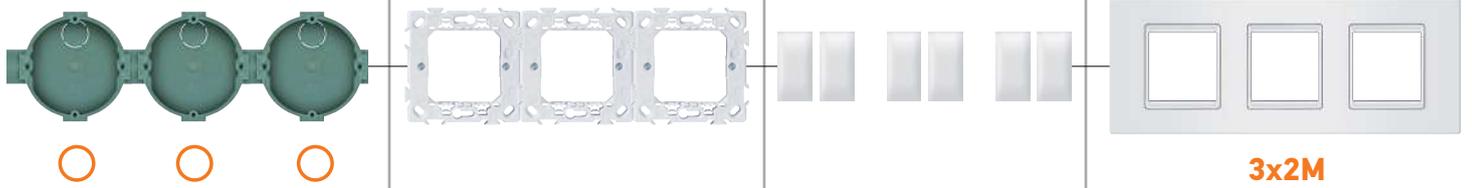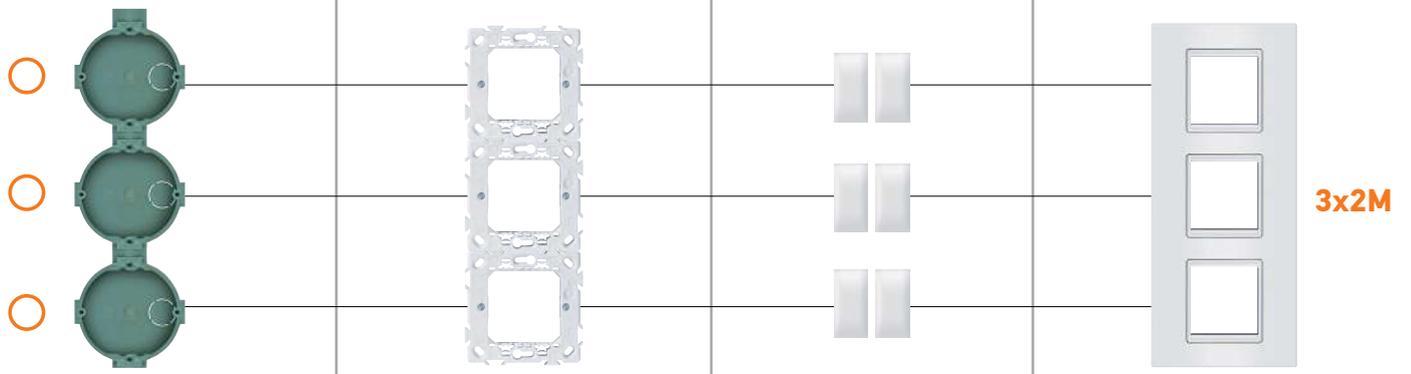

## PRIRUBNICE MOUNTING FRAMES



### 71001

Prirubnica  
1M EXP  
za šuplji zid

*Mounting  
frame 1M EXP  
for hollow wall*



- Za ugradnju jednog modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka
- For one module installation;
- Installation into the mounting box Ø60 by screws



### 71101

Prirubnica  
1M EXP  
sa stegačima

*Mounting  
frame 1M EXP  
with claws*



- Za ugradnju jednog modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača
- For one module installation;
- Installation into the mounting box Ø60 by clamps



### 71002

Prirubnica  
2M EXP  
za šuplji zid

*Mounting  
frame 2M EXP  
for hollow wall*



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka
- For two module installation;
- Installation into the mounting box Ø60 by screws



### 71102

Prirubnica  
2M EXP  
sa stegačima

*Mounting  
frame 2M EXP  
with claws*



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača
- For two module installation;
- Installation into the mounting box Ø60 by clamps



### 71022

Prirubnica sa metalnim  
umetkom 2M EXP  
za šuplji zid

*Mounting frame with  
metal insert 2M EXP  
for hollow wall*



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka
- For two module installation;
- Installation into the mounting box Ø60 by screws




### 71122

Prirubnica sa metalnim  
umetkom 2M EXP  
sa stegačima

*Mounting frame with  
metal insert 2M EXP  
with claws*



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača
- For two module installation;
- Installation into the mounting box Ø60 by clamps

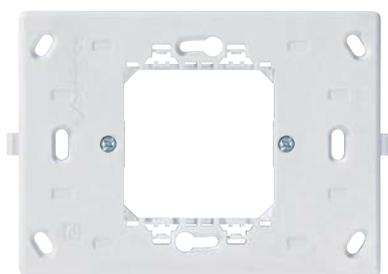

### 71023

Prirubnica  
2/3M EXP  
sa vijcima

*Mounting  
frame 2/3M EXP  
with screws*



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju 3M pomoću vijaka
- For two module installation;
- Installation into the mounting box 3M by screws

### 71123

Prirubnica  
2/3M EXP  
sa stegačima

*Mounting  
frame 2/3M EXP  
with claws*



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača
- For two module installation;
- Installation into the mounting box Ø60 by clamps




### 71003

Prirubnica  
3M EXP  
sa vijcima

*Mounting  
frame 3M EXP  
with screws*



- Za ugradnju tri modula;
- Ugradnja u montažnu kutiju 3M pomoću vijaka
- For three module installation;
- Installation into the mounting box 3M by screws

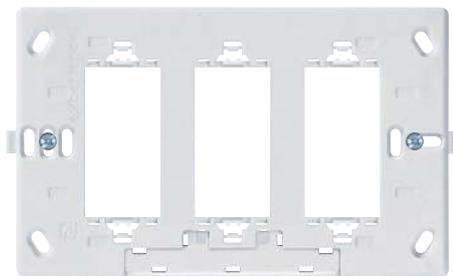

### 71131


Prirubnica 3x1M EXP  
za univerzalni kupatilski indikator,  
sa vijcima

*Mounting frame 3x1M EXP  
for universal bathroom set,  
with screws*



- Za ugradnju tri modula;
- Ugradnja u montažnu kutiju 4M pomoću vijaka

- For three module installation;
- Installation into the mounting box 4M by screws

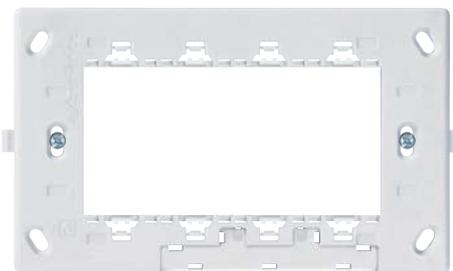

### 71004


Prirubnica 4M EXP  
sa vijcima

*Mounting frame 4M EXP  
with screws*



- Za ugradnju četiri modula;
- Ugradnja u montažnu kutiju 4M pomoću vijaka

- For four module installation;
- Installation into the mounting box 4M by screws

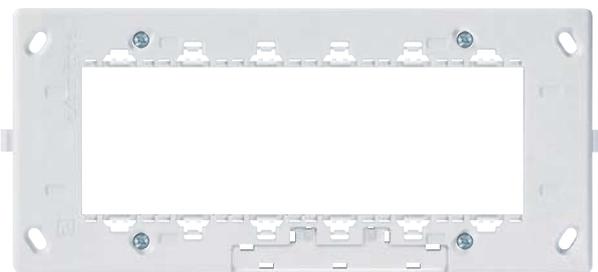

### 71006


Prirubnica 6M EXP  
sa vijcima

*Mounting frame 6M EXP  
with screws*



- Za ugradnju šest modula;
- Ugradnja u montažnu kutiju 7M pomoću vijaka

- For six module installation;
- Installation into the mounting box 7M by screws

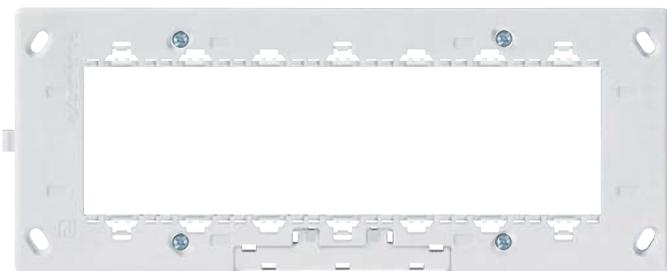

### 71007


Prirubnica 7M EXP  
sa vijcima

*Mounting frame 7M EXP  
with screws*



- Za ugradnju sedam modula;
- Ugradnja u montažnu kutiju 7M pomoću vijaka

- For seven module installation;
- Installation into the mounting box 7M by screws

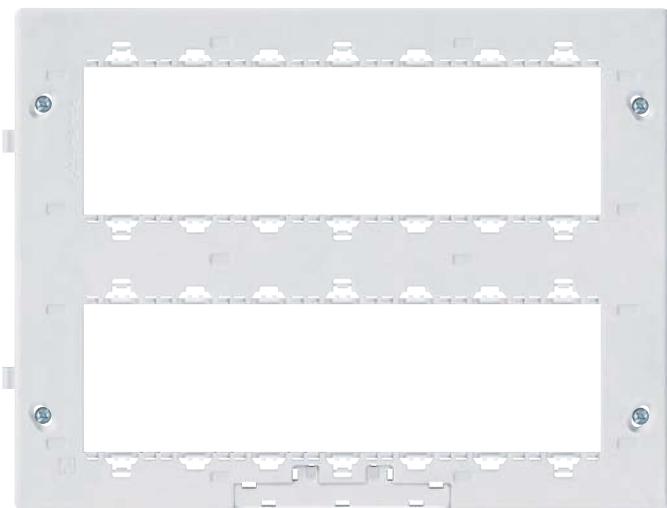

### 71027


Prirubnica 2x7M EXP  
sa vijcima

*Mounting frame 2x7M EXP  
with screws*



- Za ugradnju 2 x sedam modula;
- Ugradnja u montažnu kutiju 2x7M pomoću vijaka

- For 2 x seven module installation;
- Installation into the mounting box by screws

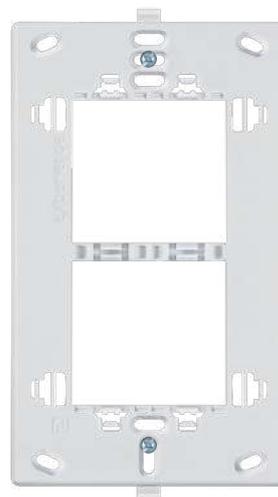

### 71144

Prirubnica 2x2M EXP za univerzalni kupatilski indikator, sa vijcima


*Mounting frame 2x2M EXP for universal bathroom set, with screws*



- Za ugradnju 2 x dva modula;
- Ugradnja u montažnu kutiju 4M pomoću vijaka

- For 2 x two module installation;
- Installation into the mounting box 4M by screws

## PRIRUBNICE SA LED OSVETLJENJEM MOUNTING FRAMES WITH LED LIGHTNING

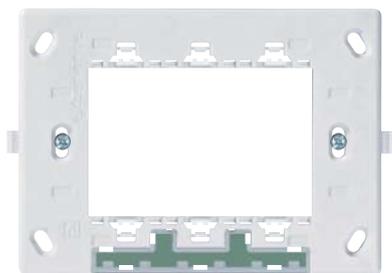


### 71303.5

Prirubnica  
3M EXP sa vijcima  
i LED osvetljenjem  
plavo svetlo,

*Mounting  
frame 3M EXP  
with screws  
and LED lightning,  
blue light*

- Za ugradnju tri modula;
- Ugradnja u montažnu kutiju pomoću vijaka

- For three module installation;
- Installation into the mounting box by screws

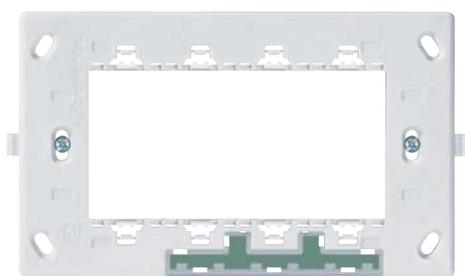


### 71304.5

Prirubnica  
4M EXP sa vijcima  
i LED osvetljenjem  
plavo svetlo,

*Mounting  
frame 4M EXP  
with screws  
and LED lightning,  
blue light*

- Za ugradnju četiri modula;
- Ugradnja u montažnu kutiju pomoću vijaka

- For four module installation;
- Installation into the mounting box by screws

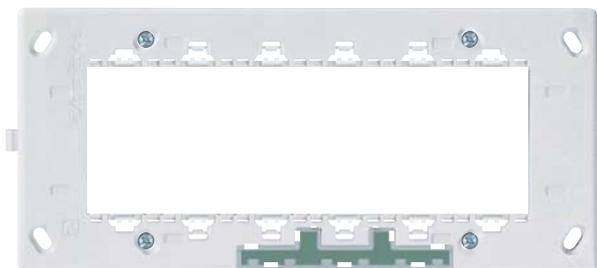


### 71306.5

Prirubnica  
6M EXP sa vijcima  
i LED osvetljenjem  
plavo svetlo,

*Mounting  
frame 6M EXP  
with screws  
and LED lightning,  
blue light*

- Za ugradnju šest modula;
- Ugradnja u montažnu kutiju pomoću vijaka

- For six module installation;
- Installation into the mounting box by screws

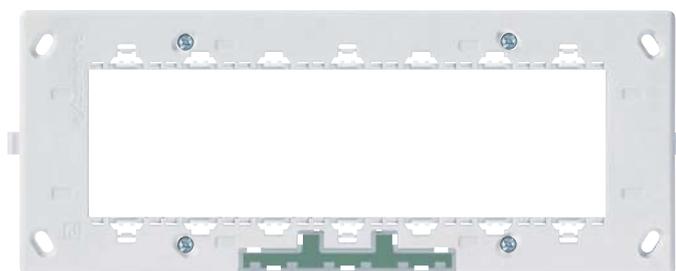

### 71307.5

Prirubnica  
7M EXP sa vijcima  
i LED osvetljenjem  
plavo svetlo,

*Mounting  
frame 7M EXP  
with screws  
and LED lightning,  
blue light*

- Za ugradnju sedam modula;
- Ugradnja u montažnu kutiju pomoću vijaka

- For seven module installation;
- Installation into the mounting box by screws



### 71202

Set vijaka M3,5 x 20  
pakovanje 100 kom  
*Screw set M3,5 x 20  
pack. 100 pcs.*



### 71203


Set vijaka M3,5 x 35  
pakovanje 50 kom  
*Screw set M3,5 x  
35 pack. 50 pcs.*



### 71205

Set vijaka M3,5 x 50  
pakovanje 50 kom  
*Screw set M3,5 x  
50 pack. 50 pcs.*

## MONTAŽNI PRIBOR INSTALLATION ACCESSORIES

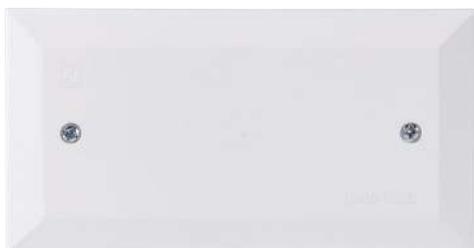

### 65232.0

Poklopac za kutiju 3M, beli

*Ornamental cover for 3M, white*

### 65242.0

Poklopac za kutiju 4M, beli

*Ornamental cover for 4M, white*

### 65272.0

Poklopac za kutiju 7M, beli

*Ornamental cover for 7M, white*

### 65277.0

Poklopac za kutiju 2x7M, beli


*Ornamental cover for 2x7M, white*

- Montaža kutije za 3, 4 i 7 modula poseduje i posebne ukrasne poklopcce koji se na kutiju pričvršćuju vijcima. Poklopci imaju višestruku namenu i obezbeđuju sledeće:

- Mogućnost korišćenja montažnih kutija, kao razvodne instalacione kutije.
- Mogućnost da se izvede dodatna instalacija koja će se naknadno povezati i koristiti,
- Mogućnost upotrebe montažnih kutija kao kutija za izjednačenje potencijala uz primenu odgovarajućih rednih stezaljki.

- *The installation boxes for 3, 4 or 7 modules have the special ornamental covers to be fixed to the box by screws. The covers are intended for multipurpose application and provide the following:*

- *Possibility of using the installation boxes as the junction boxes.*
- *Possibility of connecting and using the additional installations.*
- *Possibility of using the installation boxes as potential equalizing boxes by applying, the appropriate block terminals.*

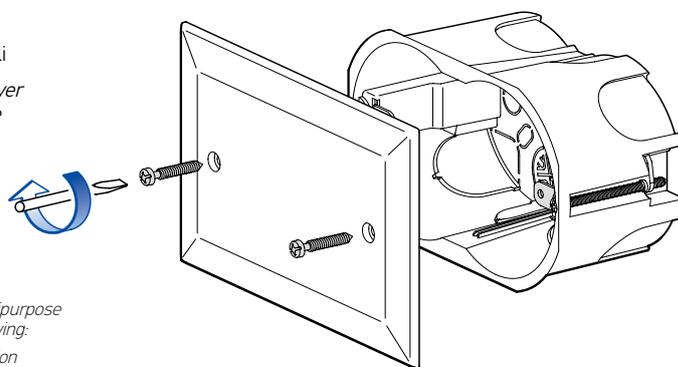

- Poklopac za zatvaranje montažne kutije kada se koristi kao razvodna ili za izjednačenje potencijala;
- Ugradnja na montažnu kutiju vijcima

- *Cover for mounting box when is used as junction box or equipotentialing;*
- *Installation onto the mounting box by screws*

\* Halogen free



### 65231.0

Zaštitni poklopac za kutiju PM3

*Protecting cover for PM3 installation box*

### 65241.0

Zaštitni poklopac za kutiju PM4

*Protecting cover for PM4 installation box*

### 65271.0

Zaštitni poklopac za kutiju PM7


*Protecting cover for PM7 installation box*

- Kod ugradnje montažnih kutija u pune zidove unutrašnjost kutije se osigurava zaštitnim poklopcem koji prilikom malterisanja zidova obezbeđuje nesmetani rad.
- Nakon sušenja maltera poklopac se jednostavno izvadi zajedno sa delom maltera koji je preko njega.
- Unutrašnjost kutije i provodnici ostaju čisti.

- *When installing, the installation boxes into the solid walls, the internal parts of the box are to be protected by the protecting cover which provides the trouble-free wall plastering.*
- *After drying, the cover can be simply taken out together with a part of plaster over it.*
- *The internal part of the box and the conducting wires remain clean.*

- Poklopac za zaštitu kutije i provodnika prilikom malterisanja;
- Snabdeven signalnim piccima radi lakšeg pronalaženja nakon malterisanja;
- Ugradnja na montažnu kutiju utiskivanjem

- *Protective cover for mounting box and conducting wires during plastering;*
- *With signal extensions for easier finding after plastering;*
- *Installation onto the mounting box by pressing*

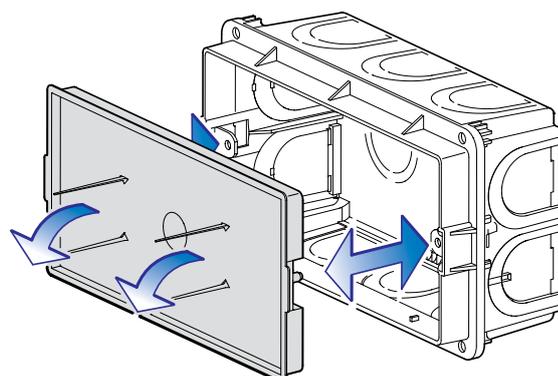

\* Halogen free

## NADGRADNE KUTIJE ZA NA ZID WALL MOUNTED BOXES

 Bela  
White **x = 0**

 Crna  
Black **x = E**



### 71402.x

Kutija nadgradna  
2M za na zid

*Wall mounted  
box 2M*

- Za ugradnju dva modula;
- Ugradnja na zid pomoću vijaka

- *For two module installation;*
- *Wall mounting with screws*



### 71012.0

Adapter za  
din šinu 35 mm  
EXP 2M

*Adapter for  
din rail 35 mm  
EXP 2M*




### 71404.x

Kutija nadgradna  
4M za na zid

*Wall mounted  
box 4M*

- Za ugradnju četiri modula;
- Ugradnja na zid pomoću vijaka

- *For four module installation;*
- *Wall mounting with screws*

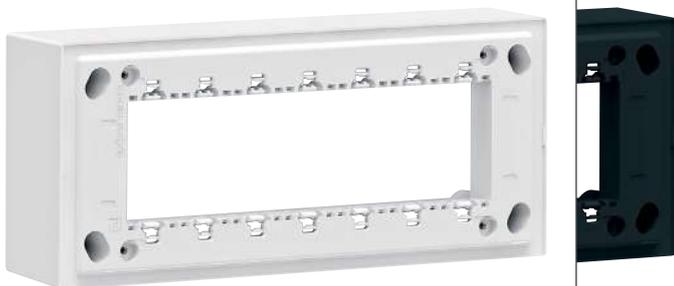

### 71407.x

Kutija nadgradna  
7M za na zid

*Wall mounted  
box 7M*

- Za ugradnju sedam modula;
- Ugradnja na zid pomoću vijaka

- *For seven module installation;*
- *Wall mounting with screws*



### 71414.x

Kutija nadgradna  
ugaona 4M

*Wall mounted  
angle box 4M*

- Kutija za ugradnju četvorostruke prirubnice;
- Ugradnja na zid pomoću vijaka

- *Mounting box for four gang mounting frame;*
- *Wall mounting with screws*



### 71417.x

Kutija nadgradna  
ugaona 7M

*Wall mounted  
angle box 7M*

- Kutija za ugradnju sedmostruke prirubnice;
- Ugradnja na zid pomoću vijaka

- *Mounting box for seven gang mounting frame;*
- *Wall mounting with screws*

- **KUĆIŠTA IP55**  
za ugradnju modula  
iz programa EXPERIENCE.

- Poseduju zaštitu od:
  - taloženja prašine,
  - potpunu zaštitu od dodira,
  - zaštitu od prskanja vode u svim smerovima.

 Bela  
White **x = 0**

- **ENCLOSURES IP55**  
for installation of  
EXPERIENCE modules.

- Enclosure has protection:
  - against dust,
  - complete touch protection
  - protection against spraying water in all directions

 Siva  
Grey **x = 1**

experience

## KUĆIŠTA IP55 ENCLOSURES IP55



### 71432.x

Kućište modula  
EXP za u zid **IP55**  
sa vijcima 2M

*Enclosure for  
modules EXP for  
into the wall **IP55**  
with screws 2M*

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja u zid u montažnu kutiju Ø60

- Protection degree IP55
- Complied with IEC 60670-1
- Mounting into the wall in mounting box Ø60



### 71442.x

Kućište modula  
EXP za u zid **IP55**  
sa stegačima 2M

*Enclosure for  
modules EXP for  
into the wall **IP55**  
with claws 2M*

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja u zid u montažnu kutiju Ø60

- Protection degree IP55
- Complied with IEC 60670-1
- Mounting into the wall in mounting box Ø60



### 71422.x

Kućište modula  
EXP za na zid **IP55** 2M

*Enclosure for  
modules EXP  
for onto the wall  
**IP55** 2M*

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja na zid pomoću vijaka prečnika do 4mm

- Protection degree IP55
- Complied with IEC 60670-1
- Wall mounting by screws dia.up to 4mm



### 71434.x

Kućište modula  
EXP za u zid **IP55**  
sa vijcima 4M

*Enclosure for  
modules EXP for  
into the wall **IP55**  
with screws 4M*

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja u zid u modularnu montažnu kutiju (4M)

- Protection degree IP55
- Complied with IEC 60670-1
- Mounting into the wall in modular mounting box (4M)



### 71424.x

Kućište modula  
EXP za na zid **IP55** 4M

*Enclosure for  
modules EXP  
for onto the wall  
**IP55** 4M*

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja na zid pomoću vijaka prečnika do 4mm

- Protection degree IP55
- Complied with IEC 60670-1
- Wall mounting by screws dia.up to 4mm

## MONTAŽNE KUTIJE ZA PUNI ZID INSTALLATION BOXES FOR SOLID WALL



### 700

Montažna kutija  
Ø60 x 40 mm  
nizajuća za rastojanje  
71mm

*Installation box  
Ø60 x 40 mm  
for sequencing  
71mm step*

### 710

Montažna kutija  
Ø60 x 60mm  
nizajuća za rastojanje  
71mm

*Installation box  
Ø60 x 60 mm  
for sequencing  
71mm step*


### 800

Montažna kutija  
Ø60 x 40mm  
nizajuća za rastojanje  
80mm

*Installation box  
Ø60 x 40 mm  
for sequencing  
80mm step*

- Usaglašeno sa IEC 60570-1
- Ugradnja u zid,
- Mogućnost instalacije pomoću stegača ili vijaka
- *Complied with IEC 60670-1*
- *Flush mounted,*
- *Accessory installation by clamps or screw*

○ 650°C, 500V~



### 6523

Montažna kutija 3M  
za puni zid,  
50 mm

*Installation box 3M  
for solid wall,  
50 mm*

### 65236

Montažna kutija 3M  
za puni zid,  
65 mm

*Installation box 3M  
for solid wall,  
65 mm*

- Kutija za ugradnju trostruke prirubnice;
- Ugradnja u puni zid pod malter

- *Mounting box for three gang mounting frame;*
- *Installation into the solid wall*

□ 650°C, 400V~



### 6524

Montažna kutija 4M  
za puni zid, 50 mm

*Installation box 4M  
for solid wall,  
50 mm*

### 65246

Montažna kutija 4M  
za puni zid, 65 mm

*Installation box 4M  
for solid wall,  
65 mm*

- Kutija za ugradnju četvorstruke prirubnice;
- Ugradnja u puni zid pod malter

- *Mounting box for four gang mounting frame;*
- *Installation into the solid wall*

□ 650°C, 400V~



### 6527

Montažna kutija 6M/7M  
za puni zid,  
50 mm

*Installation box  
6M/7M for solid wall,  
50 mm*

### 65276


Montažna kutija 6M/7M  
za puni zid,  
65 mm

*Installation box  
6M/7M for solid wall,  
65 mm*

- Kutija za ugradnju sedmostruke prirubnice;
- Ugradnja u puni zid pod malter

- *Mounting box for seven gang mounting frame;*
- *Installation into the solid wall*

□ 650°C, 400V~

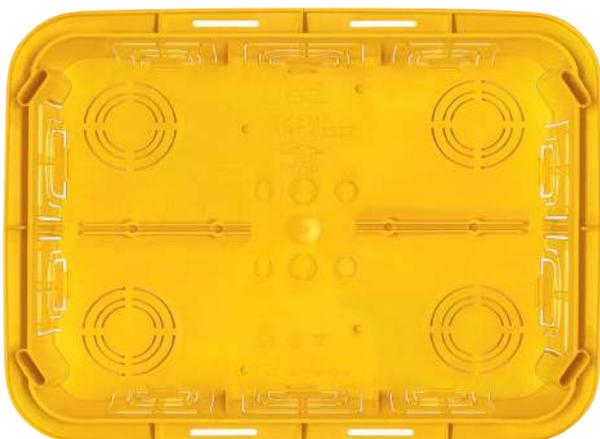

### 65227

Montažna kutija 2 x 7M  
za puni zid,  
50 mm

*Installation box  
2 x 7M for solid wall,  
50 mm*

- Kutija za ugradnju 2 x sedmostruke prirubnice;
- Ugradnja u puni zid pod malter

- *Mounting box for 2 x seven gang mounting frame;*
- *Installation into the solid wall*

□ 650°C, 400V~

## MONTAŽNE KUTIJE ZA ŠUPLJI ZID INSTALLATION BOXES FOR HOLLOW WALL




### 711

Montažna kutija  
Ø60 x 40 mm  
za šuplji zid

*Installation box  
Ø60 x 40 mm  
for hollow wall*

- Ugradnja u šuplji zid pomoću kandži sa vijcima
- *Installation into the hollow wall by screw clamps*

○ 850°C, 400V~

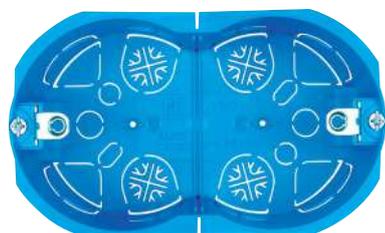


### 6533

Montažna kutija 3M  
za šuplji zid,  
50 mm

*Installation box 3M  
for hollow wall,  
50 mm*

- Kutija za ugradnju trostruke prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- *Mounting box for three gang mounting frame;*
- *Installation into the hollow wall by screw clamps*

□ 850°C, 400V~

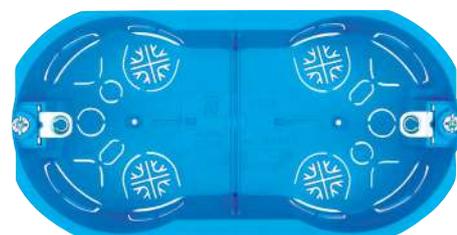


### 6534

Montažna kutija 4M  
za šuplji zid,  
50 mm

*Installation box 4M  
for hollow wall,  
50 mm*

- Kutija za ugradnju četvorostruke prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- *Mounting box for four gang mounting frame;*
- *Installation into the hollow wall by screw clamps*

□ 850°C, 400V~

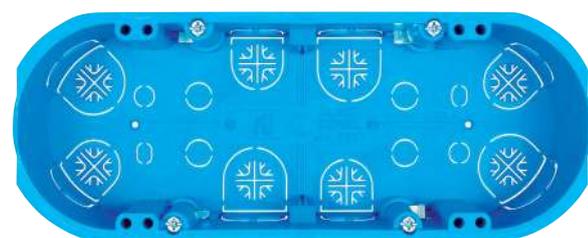

### 6537

Montažna kutija 6M/7M  
za šuplji zid,  
50 mm

*Installation box 6M/7M  
for hollow wall,  
50 mm*

- Kutija za ugradnju sedmostruke prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- *Mounting box for seven gang mounting frame;*
- *Installation into the hollow wall by screw clamps*

□ 850°C, 400V~



### 65327

Montažna kutija 2 x 7M  
za šuplji zid,  
50 mm

*Installation box 2 x 7M  
for hollow wall,  
50 mm*

- Kutija za ugradnju 2 x sedmostruke prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- *Mounting box for 2 x seven gang mounting frame;*
- *Installation into the hollow wall by screw clamps*

□ 850°C, 400V~



## SISTEM KUĆNE AUTOMATIZACIJE HOME AUTOMATION SYSTEM

OBLO living kombinuje kompletno softversko rešenje za kućnu automatizaciju sa interno razvijenim uređajima i partnerskim uređajima, sa ciljem da pokrije rasvetu, bezbednost, sigurnost, energetska efikasnost i ostale aspekte tržišta kućne automatike.

*OBLO living combines end-to-end software solution for home automation with inhouse developed home automation devices and devices from our partners to cover lighting, security, safety, energy management and other aspects of home automation market.*

### RASVETA

- Daljinski kontrolišete svetla
- Automatski upalite/ugasite svetla
- Podesite svetlo u skladu sa raspoloženjem
- Promenite boju svetla

### LIGHTNING

- Remotely control your lights
- Automatically turn on/off lights
- Set ambient light based on your mood
- Change the color of your lights



### BEZBEDNOST

- Nadgledajte dom pomoću IP kamere
- Detektujte vanredne situacije
- Budite obavešteni o nivou bezbednosti Vašeg doma
- Osigurajte se od provalnika

### SAFETY

- Monitor your home via IP camera
- Detect emergency situations
- Get notified about security flaws in your home
- Keep your home safe from potential burglars



## UŠTEDA

- Daljinski upravljajte sistemima za grejanje i hlađenje
- Pratite potrošnju električne energije
- Smanjite troškove kontrolišući dom na pametniji način
- Budite obavješteni o najvećim potrošačima u kući

## ENERGY

- Remotely control heating and cooling systems
- Monitor power consumption of home appliances
- Control your home in a smarter way to reduce energy bills
- Get notified about high energy consumption sources



## KOMFOR

- Kreirajte jutarnju scenu za savršen početak dana
- Kontrolišite uređaje dok sedite
- Pratite temperaturu, intenzitet svetlosti i vlažnost vazduha
- Proverite vremensku prognozu

## COMFORT

- Create your morning scene for the perfect start of the day
- Control devices without leaving your seat
- Monitor temperature, light intensity and humidity in your home
- Get outdoor weather information



**69400.00**

OBLO  
Smart Home  
Kontroler

OBLO  
Smart Home  
Gateway

- Napajanje ~110 – 230VAC, 50-60Hz, potrošnja <5W
- Kompatibilan sa ZigBee i Z-Wave protokolima
- Podržava integraciju uređaja zasnovanih na IP tehnologiji
- Povezuje se na internet ruter preko WiFi ili Ethernet kabla
- Ugrađeni zvučnik upozorava na vanredne situacije

- Power supply ~110 – 230VAC, 50-60Hz, power consumption <5W
- Compliant with ZigBee and Z-Wave
- Supports integration of IP-based devices
- Connects to Internet router via WiFi or Ethernet cable
- Built-in buzzer alerts emergency situations



### 6931.0

Pametna utičnica  
16A 250V~  
*Smart Plug*  
16A 250V~

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje: do 3600W (16A)
- Merenje i praćenje potrošnje

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load: up to 3600W (16A)*
- *Control appliances, monitor power usage and save energy*



### 72231

Pametni dimer  
EXP 200W, 1M  
*Smart dimmer*  
EXP 200W, 1M

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Vrsta opterećenja:
  - 2 žice – inkandescenatna, dimabilne LED i CFL
  - 3 žice – inkandescenatna, nedimabilne i dimabilne LED i CFL
- Minimalno opterećenje:
  - 2 žice – 30W inkandescenatna, 3W dimabilne LED i CFL
  - 3 žice – 0W
- Maksimalno opterećenje: do 200W

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Load type:*
  - *2 wire – incandescent, dimmable LED and dimmable CFL*
  - *3 wire – incandescent, non dimmable and dimmable LED and CFL*
- *Minimum load:*
  - *2 wire – 30W incandescent, 3W dimmable led and cfl*
  - *3 wire – 0w*
- *Maximum load: up to 200W*



### 72232

Pametna sklopka  
EXP, 10A, 1M  
*Smart Outlet*  
(High Load Switch)  
EXP 10A, 1M

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje: 10A
- Merenje i praćenje potrošnje

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load up to 10A*
- *Control appliances, monitor power usage and save energy*



### 72234

Kontroler scena,  
2 tastera EXP, 1M  
*Scene Controller,*  
2 switch EXP, 1M

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Aktivira do 4 scene pomoću 2 tastera

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Associate up to 4 rules to 2 available buttons*



### 72236

Kontroler roletni  
EXP, 1M  
*Shutter controller*  
EXP, 1M

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje: do 600W

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load: up to 600W*



### 72235.00

Baterijski kontroler scena  
EXP, sa maskom 2M  
*Battery Scene Controller*  
EXP, with cover frame 2M

- Napajanje: Baterijsko, CR2450
- Tip komunikacije: ZigBee
- Aktivira do 8 scena pomoću 4 tastera

- *Power: Battery, CR2450*
- *Connectivity: ZigBee*
- *Associate up to 8 rules to 4 available buttons*



### 69501

RGBW dimer  
za LED traku

*RGBW  
Dimmer*

- Napajanje: 12-24VAC
- Tip komunikacije: ZigBee
- Maksimalno opterećenje:  
do 4A po kanalu

- *Power: 12-24VAC*
- *Connectivity: ZigBee*
- *Minimum load:  
Up to 4A per channel*



### 69500

Kontroler  
roletni  
za doznu

*Flush  
Shutter*

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje:  
do 300W

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load:  
up to 300W*



### 69502

Pametna  
sklopka  
za doznu

*Flush  
Relay*

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje:  
do 2200W (10A)

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load:  
up to 2200W (10A)*



### 69503

Pametni dimer  
0-10V

*Flush Dimmer  
0-10V*

- Napajanje: 12VAC
- Tip komunikacije: ZigBee

- *Power: 12VAC*
- *Connectivity: ZigBee*



### 69511

Pametni dimer  
za doznu

*Flush  
dimmer*

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje:  
do 150W

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load:  
up to 150W*



### 69516

ON/OFF  
termostat  
za doznu

*Flush  
ON/OFF  
Thermostat*

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Izlaz: relejni, opterećenja  
do 2200W (10A)

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Output: Relay,  
up to 2200W (10A)*



### 69512

Baterijski  
sobni termostat  
*Room temperature  
controller - battery*

- Napajanje: baterijsko (2x AA 1.5V)
- Tip komunikacije: ZigBee
- Izlaz: relejni, opterećenja do 2200W (10A)

- *Power: Battery (2X AA)*
- *Connectivity: ZigBee*
- *Output: Relay, up to 2200W (10A)*



### 69513

Sobni  
termostat  
*Room  
temperature  
controller*

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: Z-Wave
- Izlaz: relejni, opterećenja do 2200W (10A)

- *Power: 230VAC, 50Hz*
- *Connectivity: Z-Wave*
- *Output: Relay, up to 2200W (10A)*



### 69519

Fan coil termostat  
za dvocevni  
sistem  
*Fan coil temp.  
controller  
for two-pipe  
systems*

### 69520

Fan coil termostat  
za četvorocevni  
sistem  
*Fan coil temp.  
controller  
for four-pipe  
systems*

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: Z-Wave
- Izlaz: relejni, opterećenja do 2200W (10A)

- *Power: 230VAC, 50Hz*
- *Connectivity: Z-Wave*
- *Output: Relay, up to 2200W (10A)*



### 69509

Termostat  
za radiator  
*Radiator  
thermostat*

- Napajanje: baterijsko (2x AA 1.5V)
- Tip komunikacije: ZigBee
- Izlaz: relejni, opterećenja do 2200W (10A)

- *Power: Battery (2X AA)*
- *Connectivity: ZigBee*
- *Output: Relay, up to 2200W (10A)*



### 69504

AC Kontroler PRO  
*AC Controller PRO*

- Napajanje: 5VDC
- Tip komunikacije: Z-Wave
- Kontrola klima uredjaja

- *Power: 5VDC*
- *Connectivity: Z-Wave*
- *Air condition controller*



### 69510

IR univerzalni  
daljinski upravljač  
*IR universal  
remote control*

- Napajanje: 5VDC
- Tip komunikacije: Z-Wave
- Emulator IR protokola

- *Power: 5VDC*
- *Connectivity: Z-Wave*
- *IR Emulator*



### 69508

Sirena  
*Siren*

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: Z-Wave
- Zvučni alarm, 105dB

- *Power: 230VAC, 50Hz*
- *Connectivity: Z-Wave*
- *Sound alarm, 105dB*



### 69600

CO senzor  
*CO sensor*

- Napajanje: baterijsko (CR123)
- Tip komunikacije: ZigBee
- Zvučni alarm, 85dB

- Power: Battery (CR123)
- Connectivity: ZigBee
- Sound alarm, 85dB



### 69601

Detektor dima  
*Smoke sensor*

- Napajanje: baterijsko (CR123)
- Tip komunikacije: ZigBee
- Zvučni alarm, 85dB

- Power: Battery (CR123)
- Connectivity: ZigBee
- Sound alarm, 85dB



### 69602

Detektor vode  
*Flood sensor*

- Napajanje: baterijsko (CR123)
- Tip komunikacije: ZigBee
- Zvučni alarm, 85dB

- Power: Battery (CR123)
- Connectivity: ZigBee
- Sound alarm, 85dB



### 69608

Detektor gasa  
*Gas detector*

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Zvučni alarm, 85dB

- Power: 230VAC, 50Hz
- Connectivity: ZigBee
- Sound alarm, 85dB



### 69603

Detektor pokreta  
*Motion sensor*

- Napajanje: baterijsko (CR123)
- Tip komunikacije: ZigBee

- Power: Battery (CR123)
- Connectivity: ZigBee



### 69609

Senzor za vrata/prozore  
*Door/Window sensor*

- Napajanje: baterijsko (CR2450)
- Tip komunikacije: ZigBee

- Power: Battery (CR2450)
- Connectivity: ZigBee



### 69604

Multisenzor 3 u 1  
*Multisensor 3 in 1*

- Napajanje: baterijsko (CR123)
- Tip komunikacije: ZigBee
- Detekcija pokreta, temperature i osvetljaja

- Power: Battery (CR123)
- Connectivity: ZigBee
- Motion sensor, temperature, lux meter

## ANTIBAKTERIJSKI PROGRAM ANTIBACTERIAL PROGRAM



### A73101.0

Taster EXP 1M  
*Button EXP 1M*


- Taster 1M širine 22,2mm
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem
- *Button 1M width 22,2mm,*
- *For switches without indication;*
- *Installation onto the switch by pressing*



### A73201.0

Taster sa indikacijom EXP 1M  
*Button with indication EXP 1M*


- Taster 1M širine 22,2mm
- Za sklopke sa indikacijom
- Ugradnja na sklopku utiskivanjem
- *Button 1M width 22,2mm,*
- *For switches without indication;*
- *Installation onto the switch by pressing*



### A73301.0

Taster EXP 2M  
*Button EXP 2M*

- Taster 2M širine 44,4mm
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem
- *Button 2M width 44,4mm,*
- *For switches without indication;*
- *Installation onto the switch by pressing*



### A73401.0

Taster sa indikacijom EXP 2M  
*Button with indication EXP 2M*

- Taster 2M širine 44,4mm
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem
- *Button 2M width 44,4mm,*
- *For switches with indication*
- *Installation onto the switch by pressing*



### A70001.0

Poklopac maske (slepi modul) EXP 1M  
*Blank module EXP 1M*

- Za pokrivanje slepih modula širine 22,2mm
- Ugradnja u noseću prirubnicu utiskivanjem
- *For blank module covering 22,2mm width;*
- *Installation into the mounting frame by pressing*



### A74201.0

Keystone nosač EXP 1M  
*Keystone holder EXP 1M*

- Modul širine 22,2mm za nošenje Keystone konektora
- Ugradnja u noseću prirubnicu utiskivanjem
- *Module 22,2mm width for Keystone connectors holding*
- *Installation into the mounting frame by pressing*

# ČUVAR VAŠEG ZDRAVLJA

# YOUR HEALTH GUARDIAN

- Antibakterijski program izrađen u standardnom ALING EXPERIENCE dizajnu i isključivo u beloj boji ima funkciju zaštite korisnika od prenošenja bakterija, virusa, mikroba i gljivica čestim dodirivanjem. Dnevno više korisnika dodiruje tastere sklopki, maske i blokove priključnica. Ovo je naročito izraženo u javnim i zdravstvenim ustanovama tako da je prednja površina idealno mesto za razvoj i širenje bakterija.
- Specijalni aditivi na bazi srebrnih jona koji se dodaju u plastične mase tokom vremena uništavaju i sprečavaju dalje širenje bakterija na površini plastike. Zahvaljujući ovim karakteristikama srebra postiže se veoma efikasna i dugotrajna zaštita zdravlja svih korisnika koji dolaze u dodir sa sklopkama, maskama i priključnicama.
- Prvenstveno je značajna primena u svim prostorima gde se zahteva visok stepen higijene kao što su bolnice i druge zdravstvene ustanove, restorani, autobuske i železničke stanice, aerodromi, školske ustanove, stanovi sa bolesnim osobama osetljivim na bakterije i viruse, stanovi zdravstvenih radnika, trgovinski i poslovni centri, javne ustanove (sudovi, opštine, muzeji, bioskopi, sportski objekti i sl.).
- Proizvodi su testirani u skladu sa standardom JIS Z 2801 i poseduju visok stepen redukcije bakterija na površini plastike.
- Održavanje i čišćenje se sprovodi isto kao i kod proizvoda koji nemaju antibakterijsku zaštitu.
- Proizvodi su identični kao i standardni program sa dodatom oznakom A ispred oznake proizvoda.
- Sve maske antibakterijskog programa označene su znakom raspoznavanja



- *Antibacterial program made in standard ALING MODE design and exclusively in white color has a function to protect user from transmission of bacterial, viruses, microbes and fungi during the often touching. During the day more users touches the switch buttons, covering frames and socket blocks. It is especially expressed in the public and medical institutions, so that the front surface is perfect place for growth and spread of bacteria.*
- *The special additives on silver ions that were added to plastic compounds damage and block bacteria spread on the plastic surface. With the help of this silver characteristic there is very effective and long term protection of health for all users which are in contact with switches, covering frames and sockets.*
- *At the first time application is important at the places where a high level of hygiene is required like hospitals and other medical institutions, restaurants, bus and train stations, airports, schools, apartments with the sick persons which are sensitive on bacteria and viruses, medical employees apartments, shopping and business centers, public institutions (courthouses, townships, museums, cinemas, sport arenas).*
- *The products are tested according the standard JIS Z 2801 and they have a high level of bacteria reduction on plastic surface.*
- *Cleaning and maintenance is same like products without antibacterial protection.*
- *Products are identical with standard program with additional mark A ahead of product mark.*
- *All covering frames are marked with sign of recognition*



## A74102.0

Priključnica dvopolna sa zaštitom kontakata 16A 250V~ EXP 2M

*Double-pole socket outlet with safety shutter 16A 250V~ EXP 2M*

- Usaglašeno sa IEC 60884-1
- Ugradnja u noseću priрубnicu utiskivanjem

- *Complied with IEC 60884-1*
- *Installation into the mounting frame by pressing*



## A74104.0T

Priključnica dvopolna sa transparentnim poklopcem i zaštitom kontakata 16A 250V~ EXP 2M

*Double-pole socket outlet with transparent cover and safety shutter 16A 250V~ EXP 2M*

- Usaglašeno sa IEC 60884-1
- Ugradnja u noseću priрубnicu utiskivanjem

- *Complied with IEC 60884-1*
- *Installation into the mounting frame by pressing*



## A72121.0

Priključnica dvopolna 10A 250V~ EXP1M, CEI 23-50/P11 italijanska

*Double-pole socket outlet CEI 10A 250V ~ EXP 1M*

- Usaglašeno sa CEI 23-50/P11;
- Ugradnja u noseću priрубnicu utiskivanjem

- *Complied with CEI 23-50/P11;*
- *Installation into the mounting frame by pressing*




## A74263.0

Priključnica antenska TV IEC završna 5dB EXP 1M

*TV aerial socket end-line 5db IEC EXP 1M*

- Usaglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko vijčane veze;
- Prigušenje signala cca 5dB;
- Ugradnja u noseću priрубnicu utiskivanjem

- *Complied with IEC 169-2 - M connector;*
- *Installation of aerial cable by screw terminals;*
- *Signal attenuation approx. 5dB;*
- *Installation into the mounting frame by pressing*



### A70102.0


Maska  
2M EXP,  
ANTIBACTERIAL,  
bela

*Cover frame  
2M EXP,  
ANTIBACTERIAL,  
white*



- Za pokrivanje sklopa sa dva modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with two modules;*
- *Installation onto the mounting frame by pressing*

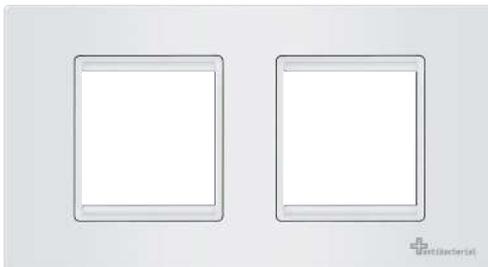


### A70122.0

Maska 2x2M EXP,  
ANTIBACTERIAL,  
horizontalna, bela

*Cover frame  
2x2M, EXP,  
ANTIBACTERIAL,  
horizontal, white*

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the two assemblies with two modules in horizontal mounted box Ø60;*
- *Installation onto the mounting frame by pressing*

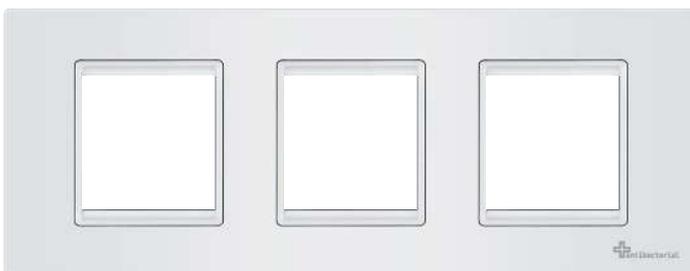



### A70132.0

Maska 3x2M EXP,  
ANTIBACTERIAL,  
horizontalna, bela

*Cover frame  
3x2M, EXP,  
ANTIBACTERIAL,  
horizontal, white*

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the three assemblies with two modules in horizontal mounted box Ø60;*
- *Installation onto the mounting frame by pressing*

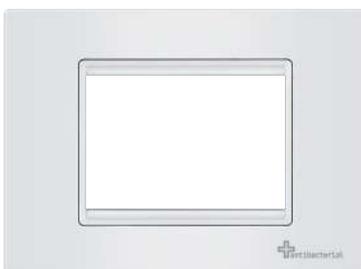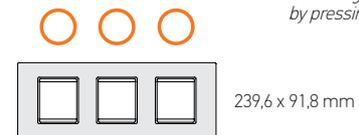


### A70103.0

Maska  
3M EXP,  
ANTIBACTERIAL,  
bela

*Cover frame  
3M EXP,  
ANTIBACTERIAL,  
white*

- Za pokrivanje sklopa sa tri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with three modules;*
- *Installation onto the mounting frame by pressing*

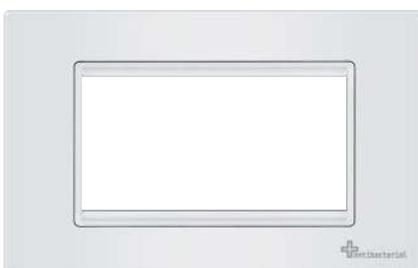

### A70104.0

Maska  
4M EXP,  
ANTIBACTERIAL,  
bela

*Cover frame  
4M EXP,  
ANTIBACTERIAL,  
white*

- Za pokrivanje sklopa sa četiri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with four modules;*
- *Installation onto the mounting frame by pressing*



### A70107.0

Maska  
7M EXP,  
ANTIBACTERIAL,  
bela

*Cover frame  
7M EXP,  
ANTIBACTERIAL,  
white*


- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*






## ŠEME VEZIVANJA WIRING DIAGRAMS

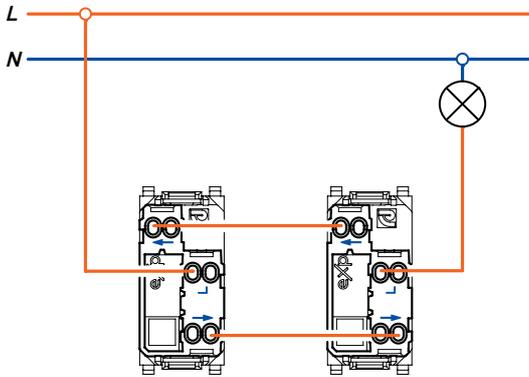


**72103**

Sklopka naizmenična  
Two-way switch

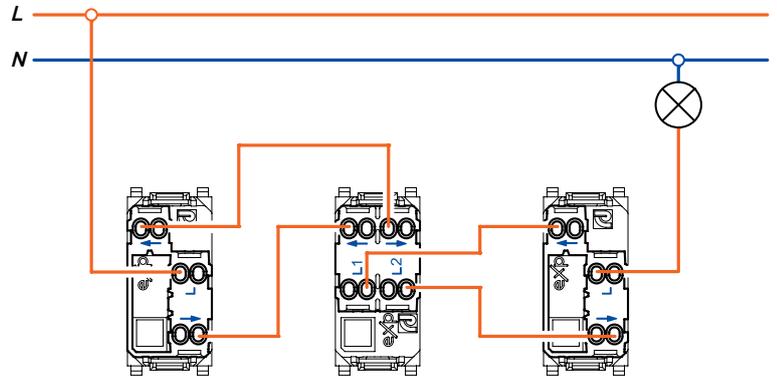


**72104**

Sklopka ukrсна u kombinaciji sa dve sklopke naizmenične  
Intermediate switch in combination with two two-way switches

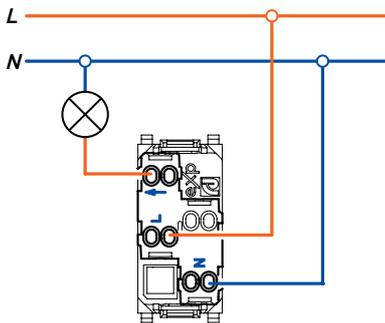


**72105**

Sklopka jednopolna sa priključkom za nulti  
provodnik (indikatorska)  
Single-pole switch with connection for the  
neutral conductor (with indicator)



**72107**




**72101**

Sklopka jednopolna  
Single-pole switch


**72111**

Taster sklopka jednopolna  
Single-pole push-button  
switch

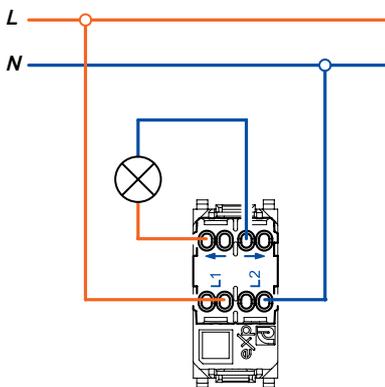

**72106**

Sklopka dvopolna  
Double-pole switch

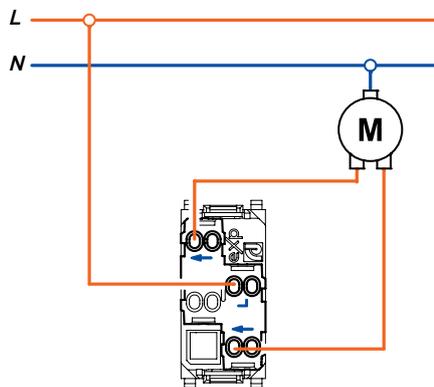


**72108**

Sklopka za roletne  
Rolling shutter  
switch


**72118**

Taster sklopka za roletne  
Rolling shutter push-button  
switch

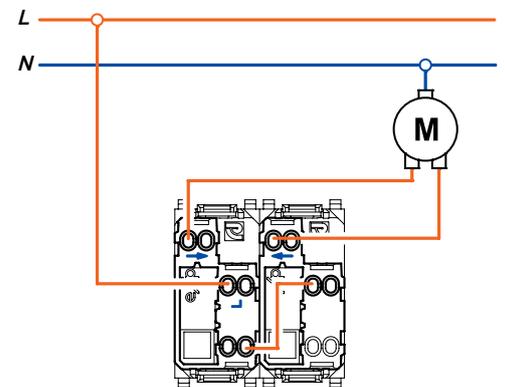


**72114**

Taster sklopka za roletne  
Rolling shutter push-button  
switch

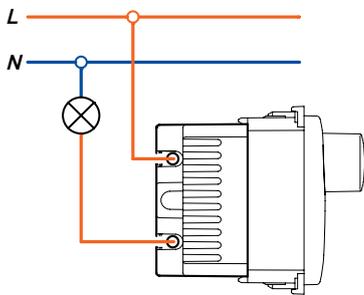


**72201**

Elektronski regulator  
rotativne




**72202**

Elektronski regulator sa naizmjeničnom sklopkom

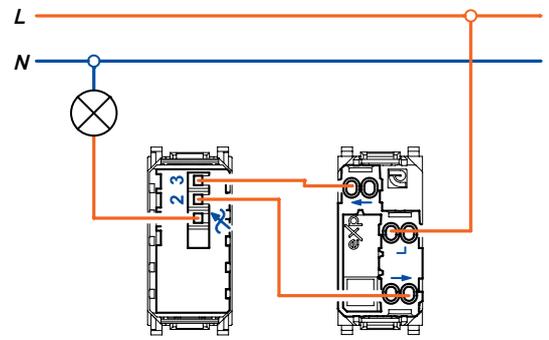


Elektronski regulator sa naizmjeničnom sklopkom, povezivanje u naizmjeničnom režimu rada




**72204**

Elektronski regulator za induktivno opterećenje

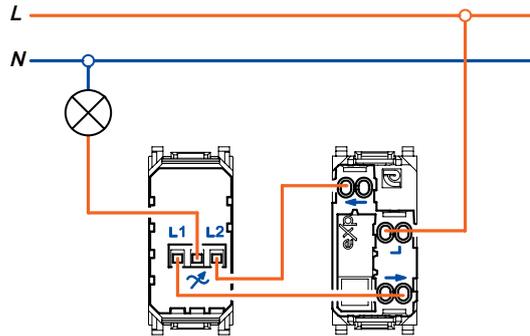


Elektronski regulator za induktivno opterećenje, povezivanje u naizmjeničnom režimu rada




**72206**

Regulator 800W povezuje se kao jedнопolna sklopka.




**72205**

Elektronski regulator za LED




Elektronski regulator za LED u režimu rada sa nultim provodnikom

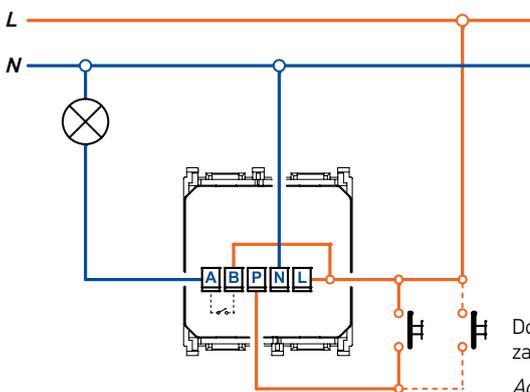

**72203**










Infracrveni detektor pokreta








Dodatni tasteri za ručno aktiviranje

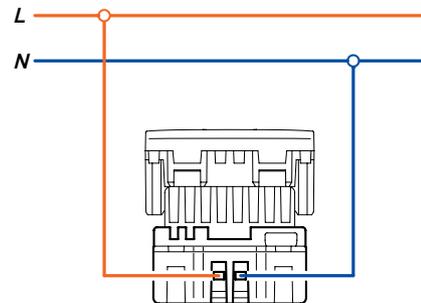




**74283**








Priključnica USB punjač

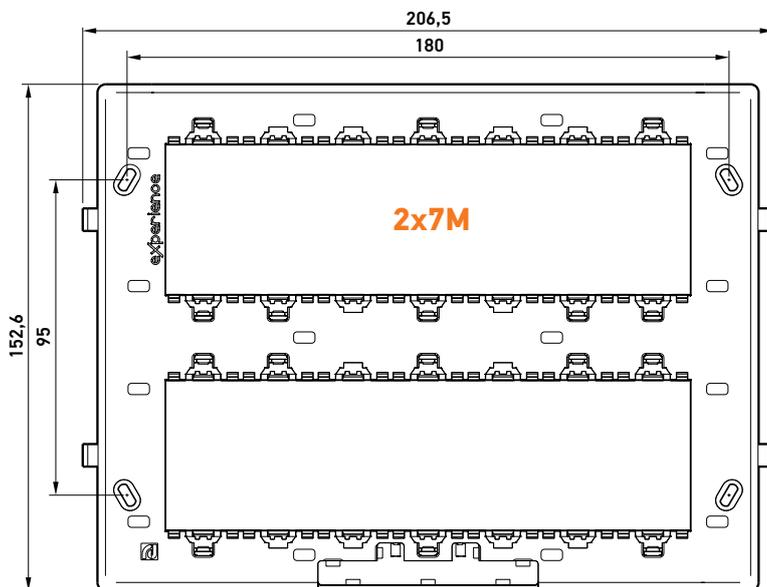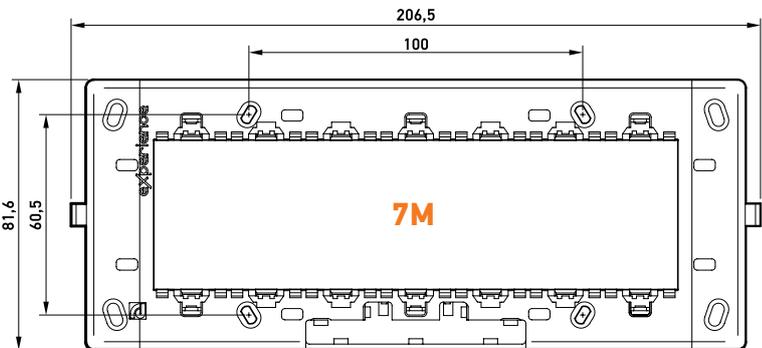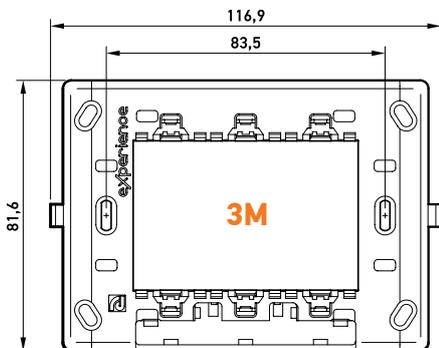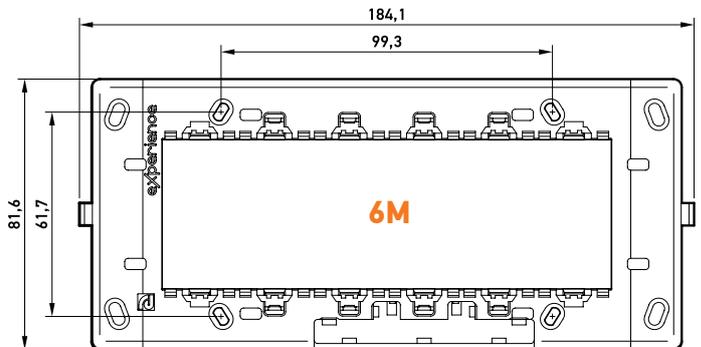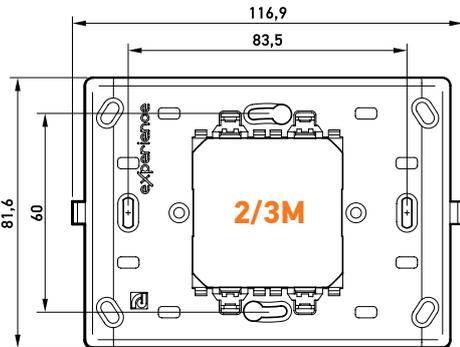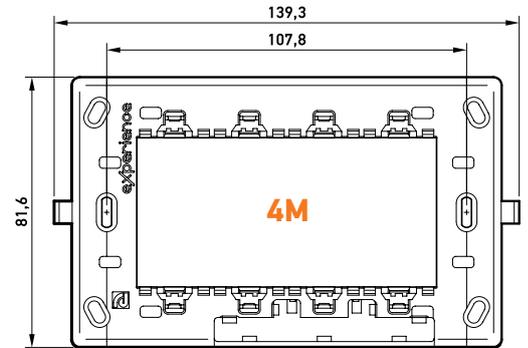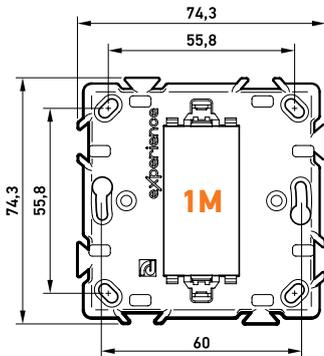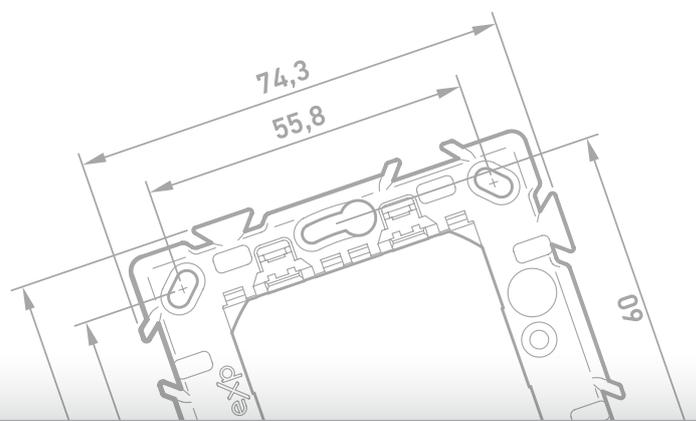

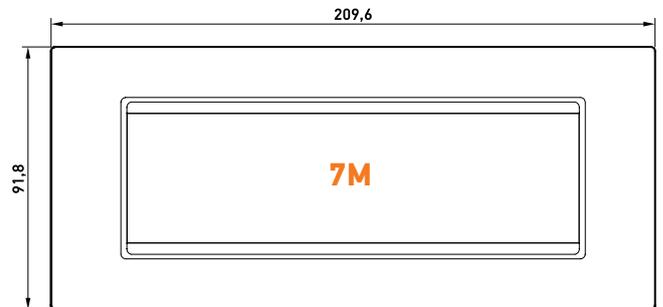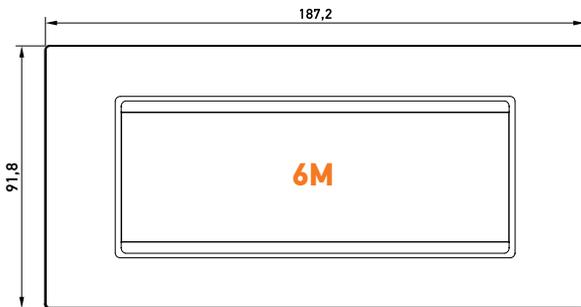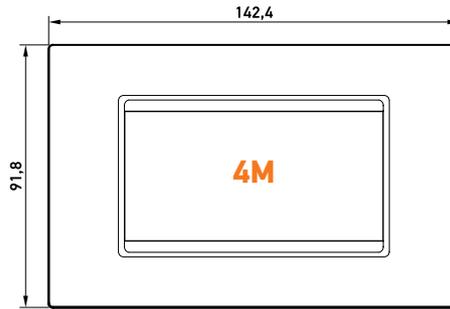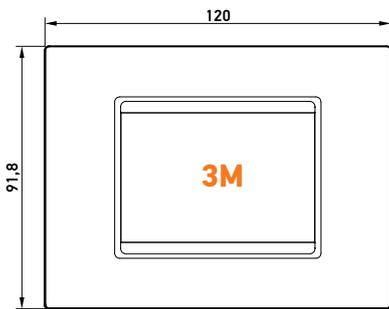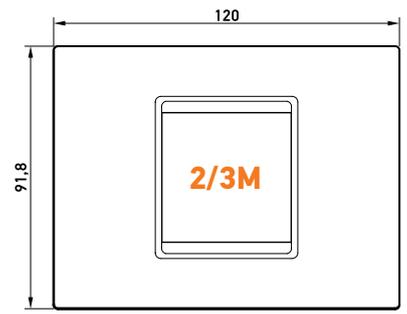

## Frame

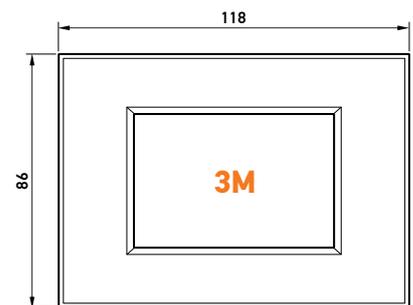

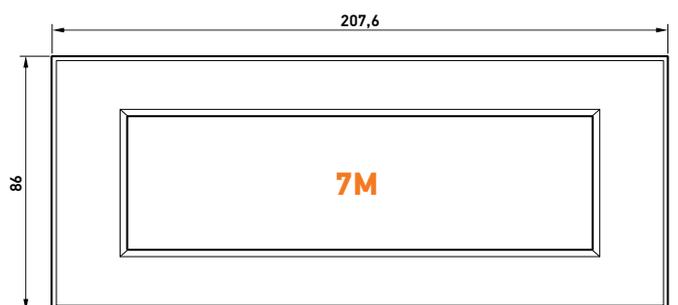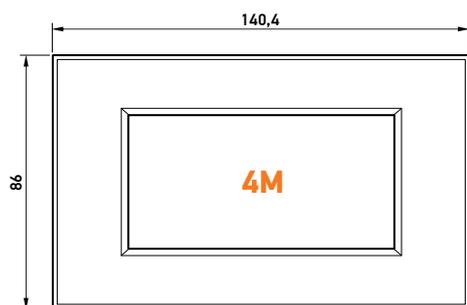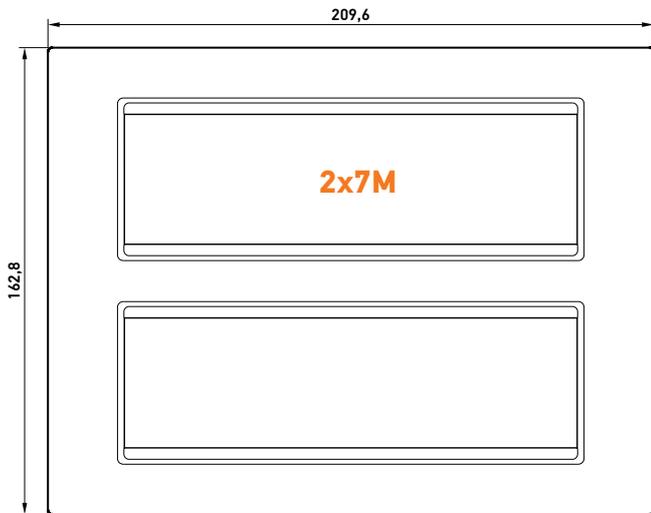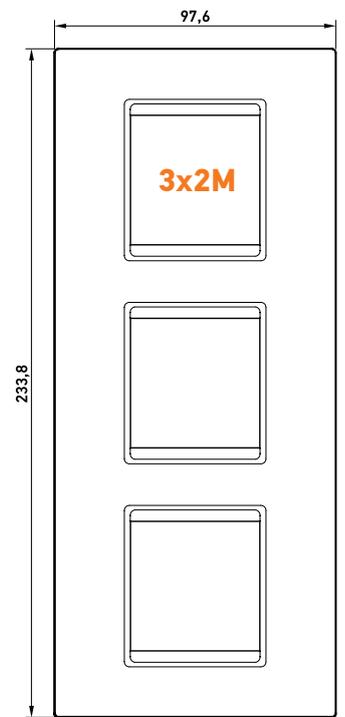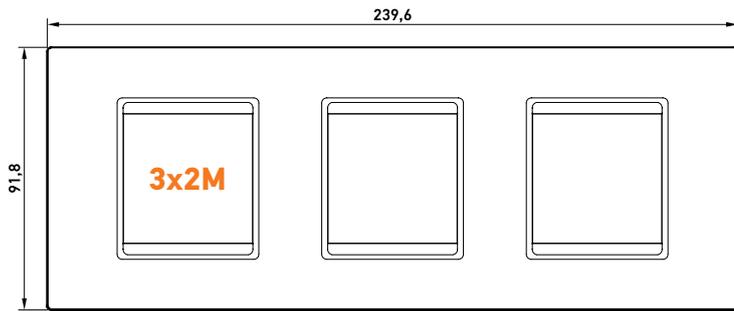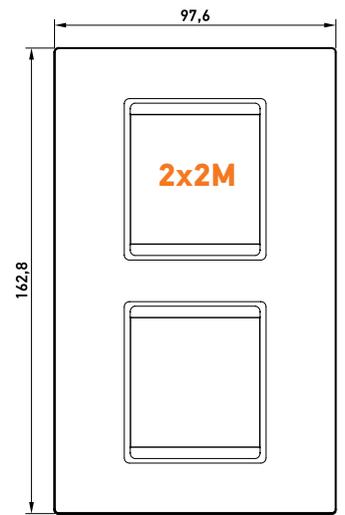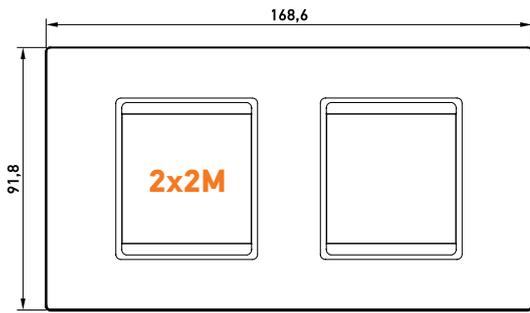

## SADRŽAJ KATALOGA THE CATALOG CONTENT

- |    |  |    |   |
|----|--|----|---|
| 14 | SKLOPKE<br>SWITCHES  | 64 | EXCLUSIVE<br>WOOD   |
| 15 | LED INDIKATORSKA SVETLA<br>LED INDICATION LAMPS                              | 66 | EXCLUSIVE<br>GLASS  |
| 16 | TASTERI<br>SWITCH BUTTONS  | 68 | EXCLUSIVE<br>METAL  |
| 17 | TASTERI SA UGRAVIRANIM SIMBOLIMA<br>SWITCH BUTTONS ENGRAVED WITH THE SYMBOLS | 70 | UGRADNJA<br>INSTALLATION  |
| 18 | SKLOPKE ZA ROLETNE<br>SWITCHES FOR SHUTTERS                                  | 72 | PRIRUBNICE<br>MOUNTING FRAMES   |
| 19 | ELEKTRONIKA<br>ELECTRONICS   | 74 | PRIRUBNICE SA LED OSVETLJENJEM<br>MOUNTING FRAMES WITH LED LIGHTNING          |
| 20 | SKLOPKE ZA KUPATILO<br>BATHROOM SWITCHES                                     | 75 | MONTAŽNI PRIBOR<br>INSTALLATION ACCESSORIES                                   |
| 21 | UNIVERZALNI INDIKATOR<br>UNIVERSAL BATHROOM SET                              | 76 | NADGRADNE KUTIJE ZA NA ZID<br>WALL MOUNTED BOXES                              |
| 22 | PRIKLJUČNICE<br>SOCKET OUTLETS   | 77 | KUĆIŠTA IP55<br>ENCLOSURES IP55   |
| 24 | KOMUNIKACIJE<br>COMMUNICATIONS   | 78 | MONTAŽNE KUTIJE ZA PUNI ZID<br>INSTALLATION BOXES FOR SOLID WALL              |
| 28 | DEKORATIVNE FRAME MASKE<br>DECORATIVE FRAME MASKS                            | 79 | MONTAŽNE KUTIJE ZA ŠUPLJI ZID<br>INSTALLATION BOXES FOR HOLLOW WALL           |
| 32 | DEKORATIVNE MASKE<br>DECORATIVE FRAMES                                       | 80 | OBLO LIVING SISTEM KUĆNE AUTOMATIZACIJE<br>OBLO LIVING HOME AUTOMATION SYSTEM |
| 34 | BASIC<br>BELA / WHITE  | 86 | ANTIBAKTERIJSKI PROGRAM<br>ANTIBACTERIAL PROGRAM                              |
| 42 | BASIC<br>CRNA / BLACK  | 89 | ŠEME VEZIVANJA<br>WIRING DIAGRAMS   |
| 50 | BASIC<br>SILVER / SILVER   | 91 | TEHNIČKI CRTEŽI<br>TECHNICAL DRAWINGS   |
| 58 | COLOR<br>VIVID   |    |   |
| 60 | COLOR<br>METALIC   |    |   |
| 62 | COLOR<br>SOFT TOUCH  |    |   |

experience



 **ALING-CONEL**



 **ALING-CONEL**

a: Železnička 10, 21432 Gajdobra, Serbia

t: +381 21 762 674, 762 586

f: +381 21 762 779

e: [sales@aling-conel.com](mailto:sales@aling-conel.com)

[www.aling-conel.com](http://www.aling-conel.com)