



**experience**

 **DALING-CONEL**

ISKUSTVO U KOJE VERUJETE

experience

YOU TRUST



experience

Od 1984. kvalitet i pouzdanost su glavni prioriteti u kompaniji Aling-Conel. To se podjednako odnosi na proizvode i usluge. Dugogodišnje iskustvo i brojna priznanja omogućila su nam da postanemo regionalni lider i pouzdan partner našim kupcima.

*Since 1984, quality and reliability are the top priorities of the company Aling-Conel. This applies equally to products and services. Many years of experience and numerous awards have enabled us to become a regional leader and reliable partner to our customers.*



 ALING-CONEL

DIZAJN OBLIKUJE NAŠ SVET

**experience**

DESIGN SHAPES OUR WORLD



Dizajnirani da zadovolje najviše sigurnosne standarde i proizvedeni od najkvalitetnijih materijala, Experience proizvodi nude mogućnost izražavanja osobenog stila korisnika u svom domu.

Ultimativna elegancija ogleda se u geometriji oblika, a smeće kombinacije boja svakom zidu daće dozu ekstravagancije.

Modularni elementi izrađuju se u 4 boje

*Designed to meet the highest safety standards and manufactured from the finest materials, Experience products offer the opportunity to express personal style of every customer.*

*The ultimate elegance is reflected in the geometry of shapes and daring color combinations will give to any wall a dose of extravagance.*

*Modular elements are done in 4 colors*

**VRLO IZRAŽAJAN - VEOMA IMPRESIVAN - NEŽAN NA DODIR**  
**VERY EXPRESSIVE - VERY IMPRESSIVE - A GENTLE TOUCH**



Bela  
White



Crna soft  
Soft black



Silver  
Silver





Krem  
Beige

## TEHNIČKE PREDNOSTI

**experience**

## TECHNICAL ADVANTAGES

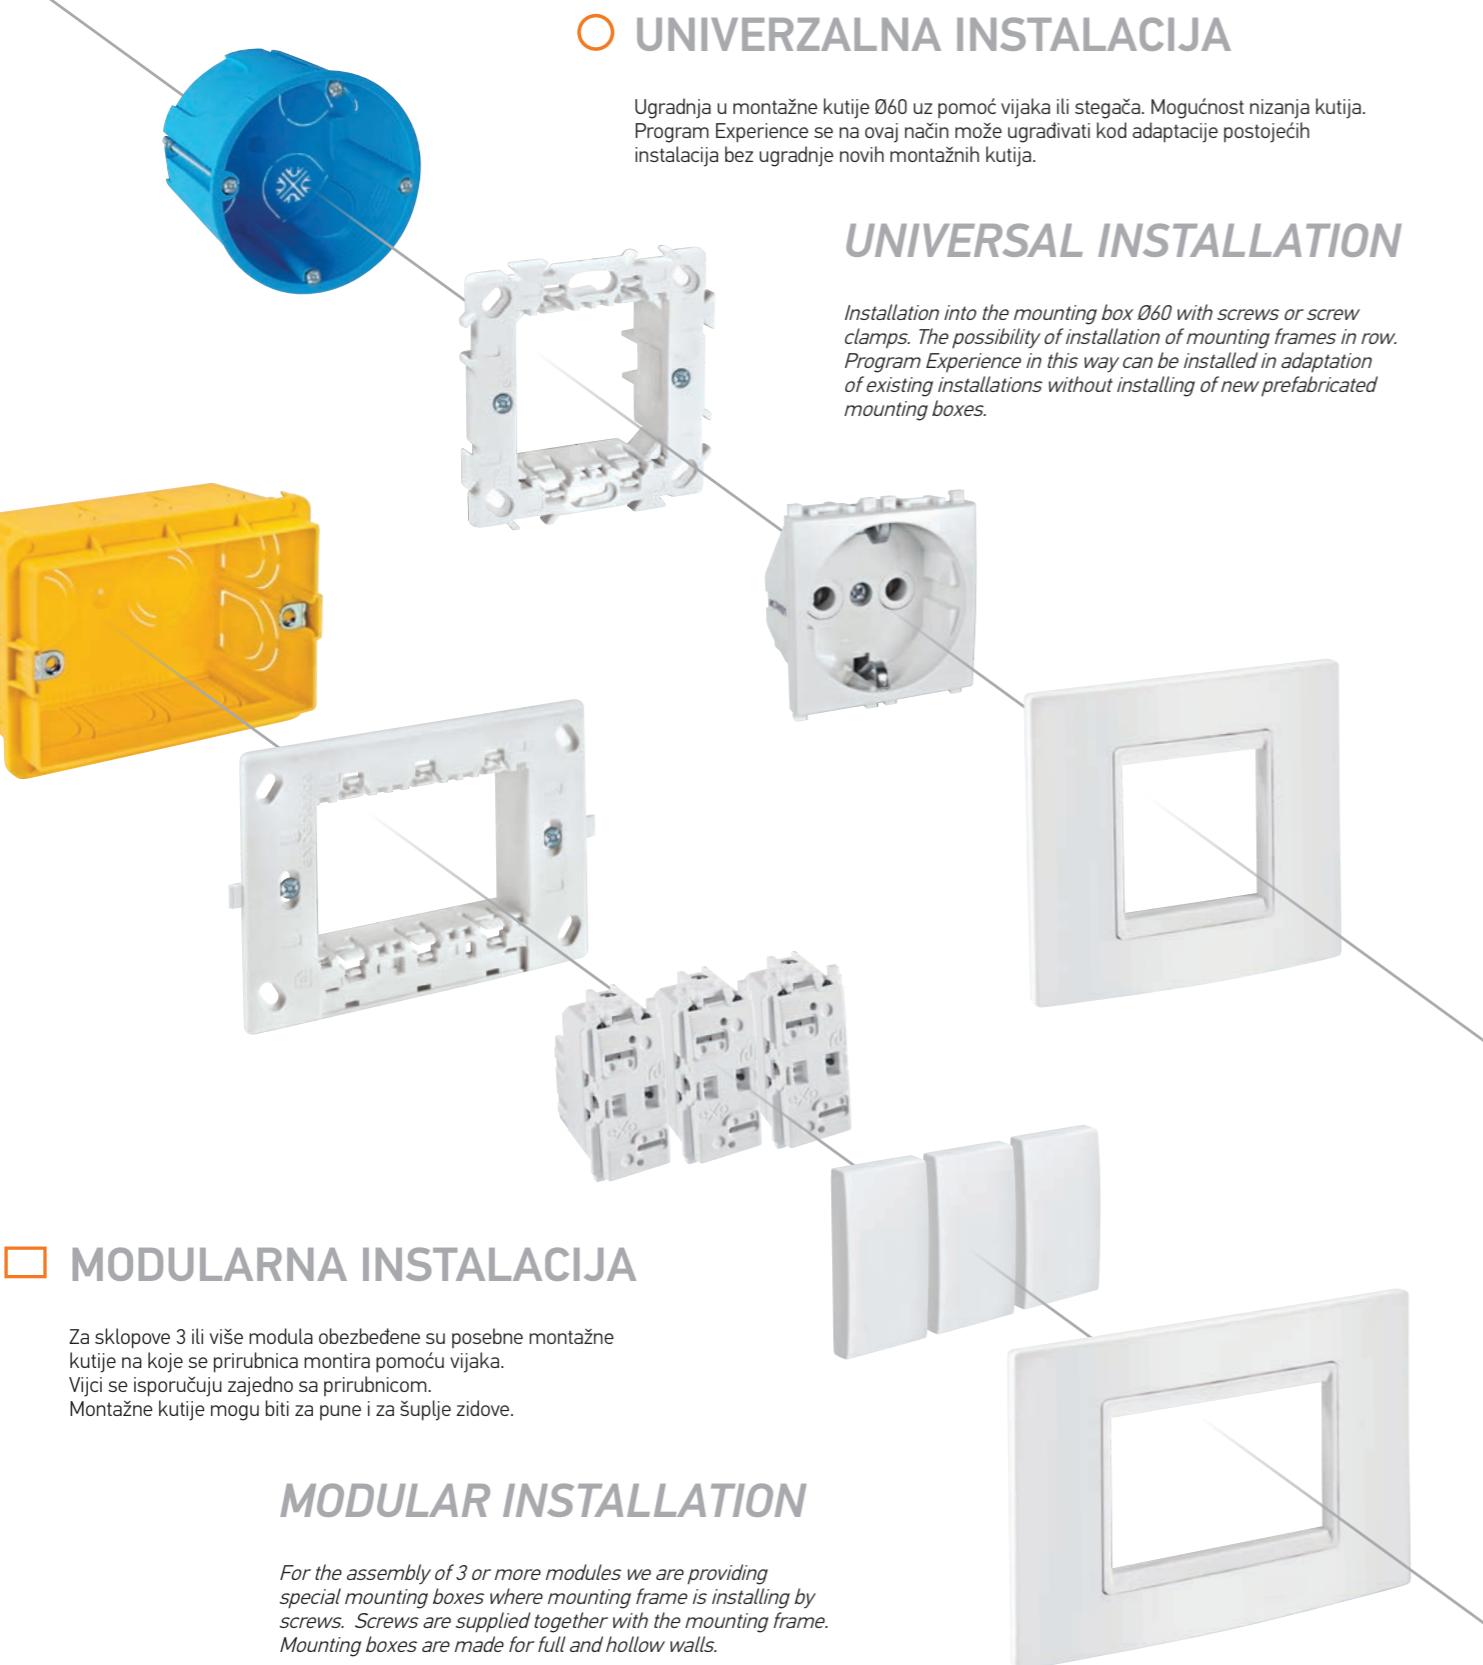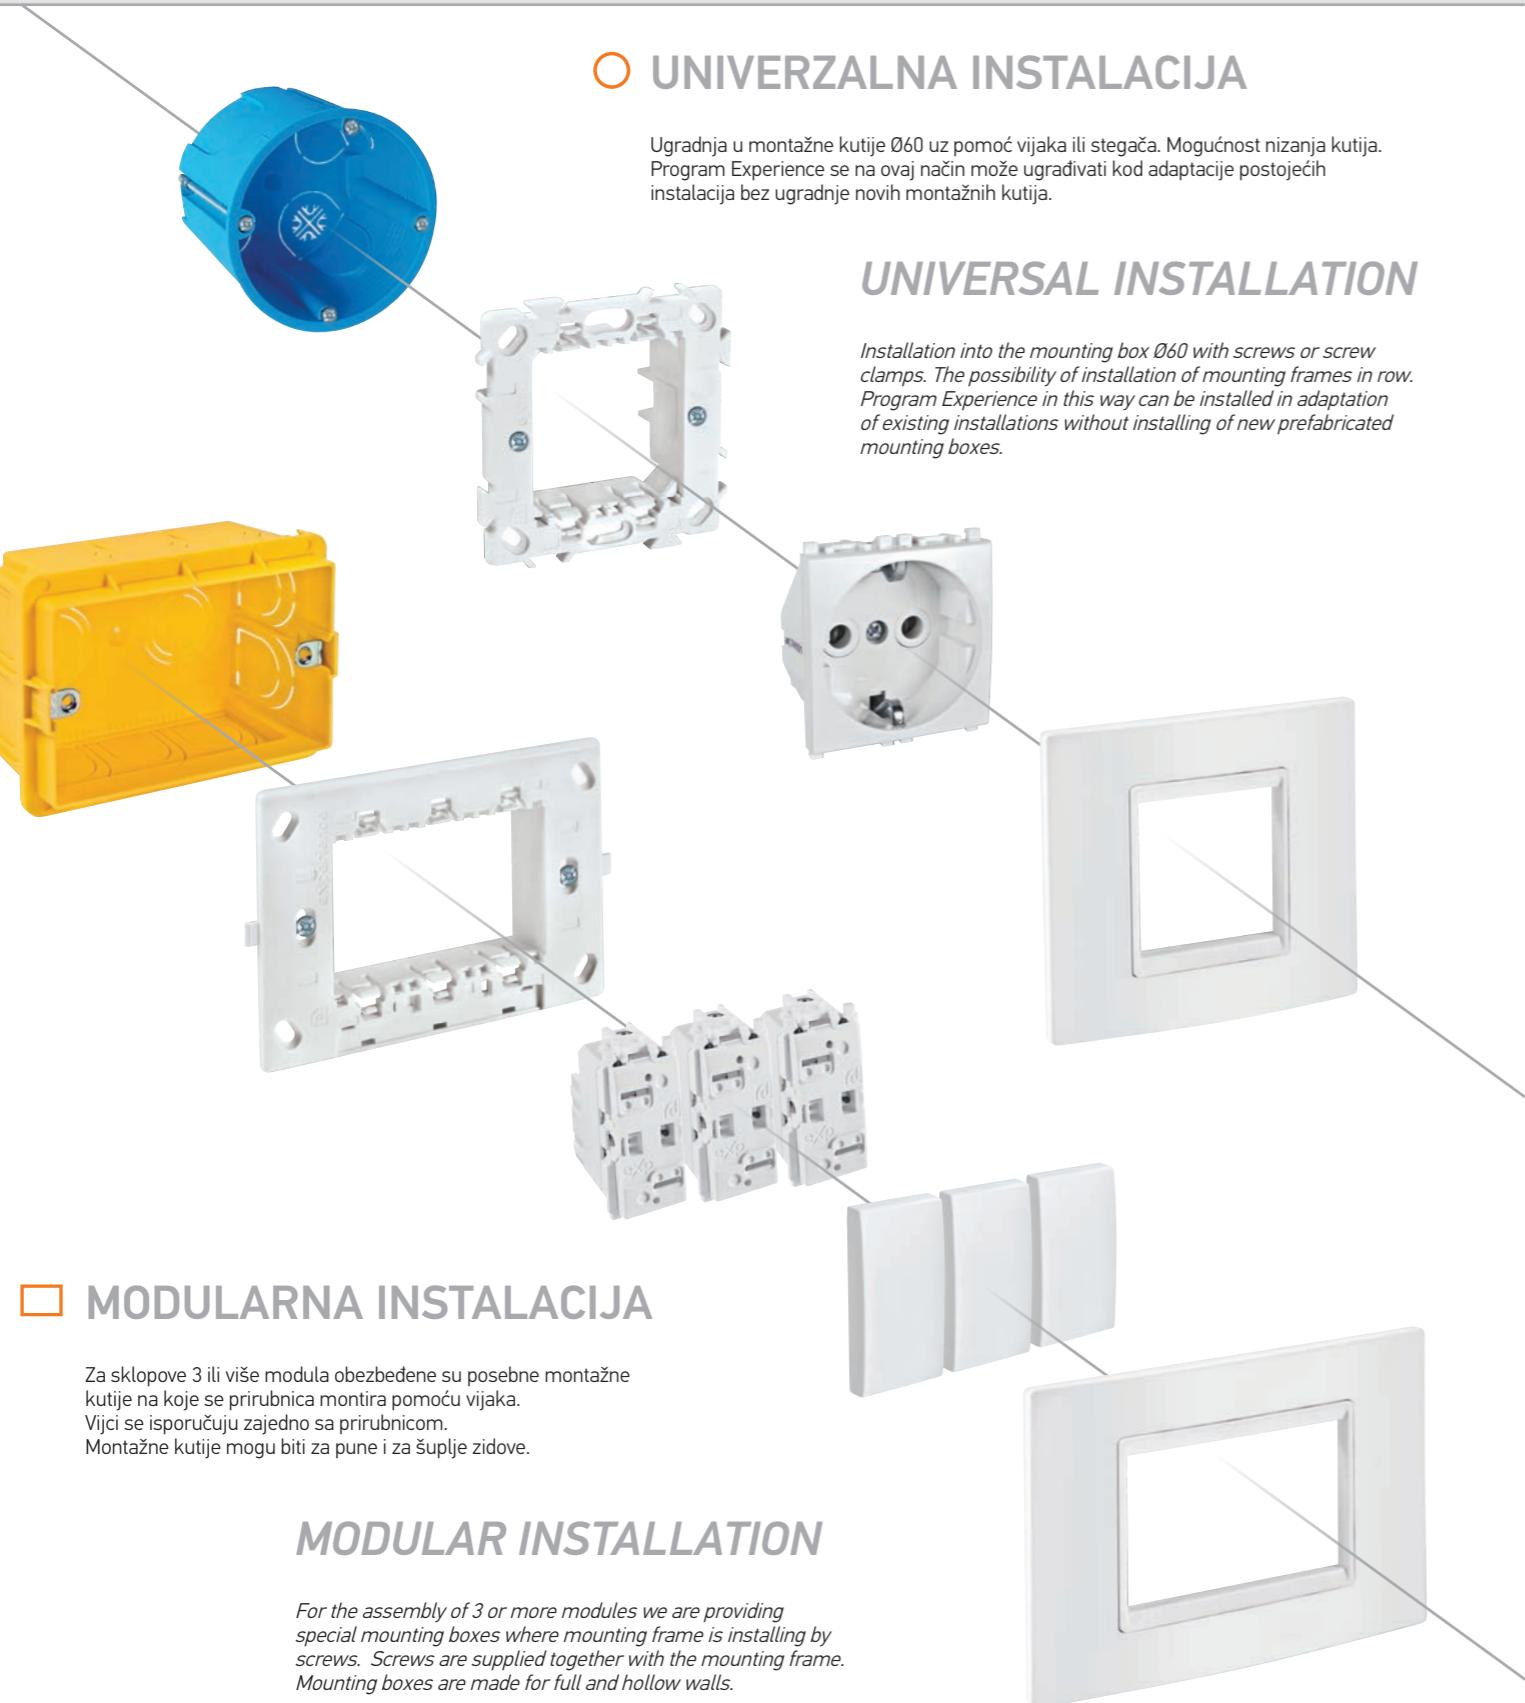


## MODULARNA INSTALACIJA

Za sklopove 3 ili više modula obezbeđene su posebne montažne kutije na koje se prirubnica montira pomoću vijaka. Vjici se isporučuju zajedno sa prirubnicom. Montažne kutije mogu biti za pune i za šuplje zidove.

## MODULAR INSTALLATION

For the assembly of 3 or more modules we are providing special mounting boxes where mounting frame is installing by screws. Screws are supplied together with the mounting frame. Mounting boxes are made for full and hollow walls.

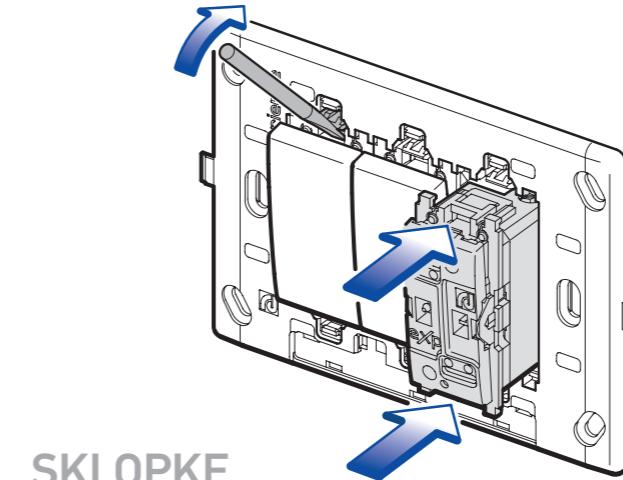

## SKLOPKE

Experience sklopke su jasno označene i sigurne za povezivanje zahvaljujući šemi koja se nalazi sa strane sklopke (smanjen je rizik od pogrešne instalacije).

U prirubnicu se postavljaju ručnim utiskivanjem sa prednje strane, bez skidanja prirubnice sa montažne kutije. Demontaža sklopke se takođe vrši sa prednje strane bez skidanja prirubnice sa montažne kutije. Dovoljno je izvijačem otkačiti modul sklopke.

Sklopke imaju jednostavne vijčane priključke koji omogućavaju sigurnu i brzu montažu. Opremljeni su uvodnim otvorima za lakše uvođenje provodnika. Prihvataju dva provodnika preseka do 4mm<sup>2</sup>. Vjici su obezbedeni od ispadanja.

LED indikacije za sklopke (za indikaciju kada je sklopka uključena ili isključena) postoje u dve varijante: sa kontaktima i sa provodnicima. Korisniku je data mogućnost izbora boje indikacije (crvena, plava, zelena, bela).



## SWITCHES

Experience switches are clearly marked and safe for connectivity thanks to the scheme, which is located on the side of the switch (reduced risk of incorrect installation).

Installing the module switch into the mounting frame is simply done by hand pressing from the front side, without removing the mounting frame from the mounting box. Disassembly is also done from the front side without removing the mounting frame from the mounting box. It is only needed to remove module by screwdriver.

Switches have simple screw connectors that allow safe and fast installation. Switches have inlets for easier implementation of conductors. Inlets can wire two conductors up to 4mm<sup>2</sup>. The screws are secured from falling out.

LED lamp for switches (for indication when the switch is ON or OFF) are offered in two types: with contacts and with conductors. Customer can choose the color of light (red, blue, green, white).



## PRIKLJUČNICE


Experience priključnice odgovaraju strogim standardima i sigurnosnim provjerama. Priključnice su snabdevene vijčanim priključcima sa uvodima za lakše uvođenje dva provodnika preseka do 2,5mm<sup>2</sup>.

Priključnice se rade i u varijanti sa membranama koje obezbeđuju zaštitu za decu sprečavanjem umetanja predmeta u priključnicu.

Montaža i demontaža u prirubnicu se vrši na isti način kao i kod sklopki.

### Prednosti utičnica Experience:

- veoma jednostavna montaža i demontaža
- pritezanje provodnika se vrši sa prednje strane i moguće je i kada je priključnica utisнута u prirubnicu (olakšava laku montažu kratkih provodnika, krutih provodnika, velikog broja provodnika u kutiji)

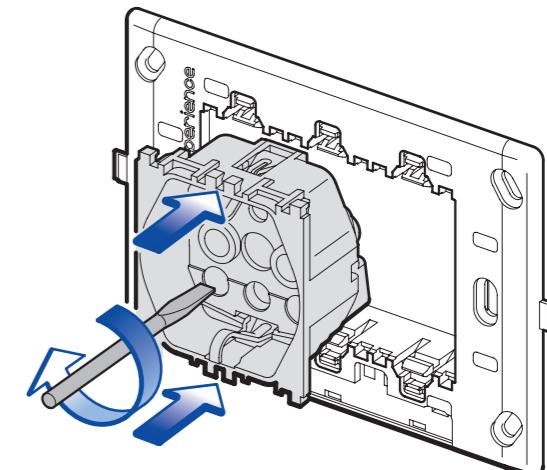

## SOCKET OUTLETS

Experience socket outlets are complied with strict standards and safety checkouts. Socket outlets are supplied with screw connections with introductions to facilitate the introduction of two conductors up to 2.5mm<sup>2</sup>.

Sockets are made with membranes that provide protection for children by preventing insertion of objects into the socket outlet.

Installation and disassembly into the mounting frame is done the same way as for the switches.

### Experience socket outlet advantages:

- user friendly assembly and dis-assembly
- tightening of the conductors is done from the front and is possible even when the socket outlet is inside the mounting frame (facilitates easy installation of short conductors, hard conductors, a large number of conductors in a mounting box)

## TEHNIČKE PREDNOSTI

**experience**

## TECHNICAL ADVANTAGES

### REGULATORI

U prirodi najlepše svetlo pojavljuje se u sутону. У кући, elektronski regulator vam pomaže da kreirate priјатан светлосни амбијент у коме ћете се опуштати.

Уз сваки elektronski regulator pakuje се јасно техничко упутство за повезивање и коришћење. (слика)

Elektronski regulator за LED rasvetu може да димује LED сјалице до 200W. Изузетне техничке карактеристике омогућавају савршено димовање без треперенja.

#### Prednosti:

- Višefunkcionalni regulator svetlosti
- Jednostavno programiranje tasterom
- Ugradnja u postojeću instalaciju
- Mogućnost dimovanja dimabilnih sijalica male snage (1-3W)

### DIMMERS

In nature the most beautiful light occurs in the twilight. In the house, the electronic controller helps to create a pleasant lighting atmosphere where you can relax.

With each electronic controller is packed a clear technical guidelines for connection and use.

Dimmer for LED can regulate LED lights up to 200W. Exceptional technical characteristics provide a perfect flicker-free dimming.

#### Benefits:

- Multifunctional Dimmer
- Simple programming button
- Installation in an existing installation
- Possibility of dimming of low power (1-3W) dimmable bulbs



### KOMUNIKACIJE

Telefon, TV, Internet – teško je zamisliti садашnjicu bez комуникација. Experience комуникационске прикључнице гарантују оптималну повезаност и високу поузданост преноса података кроз конекторе RJ12 и RJ45 који задовољавају стандарде Cat3, Cat5e, Cat6 и Cat6a.

Проводници се спајају у конекторе без употребе алата (toolless) уметањем проводника који се аутоматски везује са контактима затварањем конектора. Конектори RJ45 задовољавају стандарде vezivanja TIA/EIA 568A или 568B.

### COMMUNICATIONS

Telephone, TV, Internet – it is hard to imagine the present without communications. Experience communications modules guarantee optimal connection and high reliability of data transfer through the RJ12 and RJ45 connectors that meet the standards Cat3, Cat5e, Cat6 and Cat6a.

The conductors are connected to the connectors without tools (tool-less) by inserting conductor that is automatically associated with contact closure connector. RJ45 connectors meet the standards binding TIA / EIA 568A or 568B.



### DEKORATIVNE MASKE

Maske modularnog programa Experience svojom nekonvencionalnom dimenzijom (92mm visine) i svojim jasnim geometrijskim linijama zadovoljavaju i klasične i moderne zahteve korisnika.


Novina Experience modularnog sistema je posebno dizajniran nosač maske, koji je сastavni део dekorativne маске. Носач маске производи се у три боје: бела, црна и сребрна. Sa предње стране види се као медурам који наглашава дизајн маске. Гледано са стране, маска са носачем делује као да „љебди“ на зиду.



### DECORATIVE COVER FRAMES

Cover frames of modular program Experience with its unconventional dimensions (92mm in height) and its clear geometric lines meet both classic and modern customer demands.

Novelty of Experience modular program is specially designed frame holder, that is an integral part of decorative cover frame. Frame holder is made in three colors: white, black and silver. From the front it looks like inner frame that emphasizes frame design. Seen from the side, the decorative cover frame together with the frame holder appears to "float" on the wall.


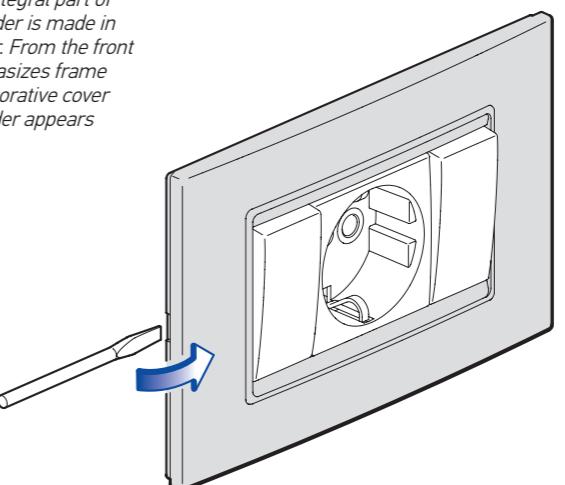


- The covering frame is positioned without any tools by simple pressing onto the flange
- The removal of frame is very simple by using the screw driver on the provided point thus reducing the possibility of any damage

### PRIRUBNICE

Prirubnica je konstruisana тако да поседује чврстину и отпорност на ударе и врло је једноставна за уградњу. Fleksibilna мontažа чак и код неравних зидова омогућује да постављени склоп увек стоји равно.

Места за уградњу на прирубници и симетрична геометрија прирубnice 2M омогућава хоризонталну и вертикалну уградњу у низу.

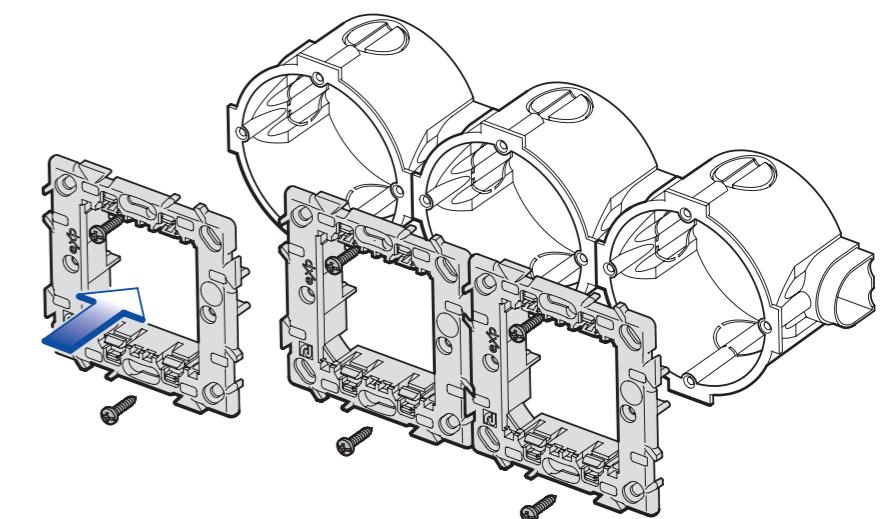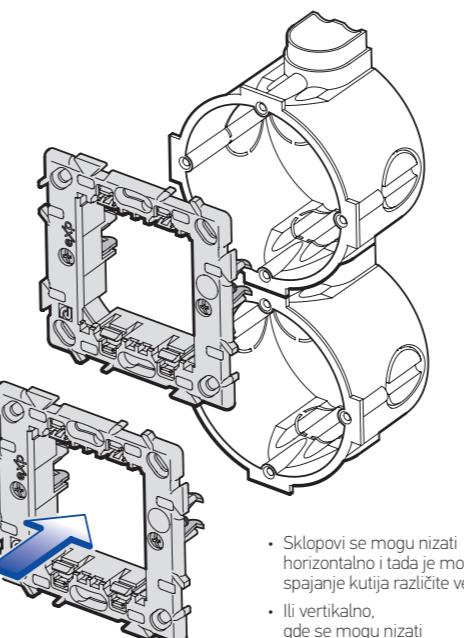

- Sklopovi se могу низати хоризонтално и тада је могуће спајање кутија разлиčите величине.
- Или вертикално, где се могу низати само кутије исте величине.
- The assemblies can be followed in a row horizontally and then it is possible to connect the installation boxes of various sizes.
- Or vertically, where only the boxes of the same size can follow in a row.

### MOUNTING FRAMES

Mounting frame is designed to be hard, withstand impacts and is very easy for installation. A flexible installation allows that even at rough walls assembly can be installed straight.

Holes on mounting frame and symmetric geometry of mounting frame 2M are allowing horizontal and vertical installation in a row.

TRI OSNOVNA PROGRAMA

experience

THREE MAIN PROGRAMS

eXperience

## BASIC

BASIC karakteriše ultimativna elegancija i smeće kombinacije kontrasta svetlosti i tame dopunjene srebrom. U BASIC liniji tri su osnovne boje maski: bela, crna i silver. Svaka maska dolazi u 3 kombinacije nosača maske.

*BASIC reflects the ultimate elegance and bold contrast of light and dark colors complemented with silver touch. Each mask comes in 3 different combinations with mask holder.*



## COLOR

COLOR grupu proizvoda čini 16 maski podeljenih u razigrani kolorit pod nazivom VIVID, metalik efekat pod nazivom METALLIC i nežne na dodir SOFT TOUCH.

COLOR consists of 16 cover frames divided into playful colors named VIVID, metallic effect called METALLIC and tender on touch called SOFT TOUCH.

Linija VIVID sastoji se od 4 pastelne boje sa belim nosačem maske (pastel plava, pastel zelena, pastel narandžasta i lavanda) i 3 neobična kontrasta sa crnim nosačem maske (krem, grafit i crvena)

VIVID line has 4 pastel colors with white mask holder (pastel blue, pastel green, pastel orange and lavender) and 3 contrast colors with black mask holder (beige, graphite and red)



Linija METALLIC sastoji se od 7 metalik boja sa istovetnom nijansom nosačem maske (metalik zlatna, zlatna sjaj, zlatna saten, antik srebro, aluminijum, metalik zelena, metalik plava).

METALLIC line consists of 7 metallic colors with the same shade of mask holder (metallic gold, shiny gold, satin gold, antique silver, aluminum, metallic green, metallic blue)



Liniju SOFT TOUCH čine 2 osnovne boje: sky blue i soft touch crna. Novina je sky blue boja (bela sa fosforom) koja u mraku svetli plavičastim svetlom.

SOFT TOUCH line has 2 colors: sky blue and soft touch black. The novelty is sky blue color (white phosphorus) that illuminates in the dark bluish light.



## EXCLUSIVE

EXCLUSIVE grupa maski proizvedena je od prirodnih materijala i podeljena je na maske izradene od prirodnog drveta WOOD, sofisticirane maske izradene od stakla GLASS i robusne maske izradene od metala METAL. Sve maske u EXCLUSIVE grupi izrađuju se sa crnim nosačem maske.

EXCLUSIVE group mask is made of natural materials and is divided into a mask made of natural Wood, sophisticated masks made of Glass and robust mask made of Metal. All the masks EXCLUSIVE group are made with black mask carrier.



**experience**

## SKLOPKE SWITCHES



- Usaglašeno sa IEC 60669-1
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60669-1
- Installation into the mounting frame by pressing



**72101**  
Sklopka jednopolna  
16AX 250V~ EXP 1M  
bez tastera  
*1 way switch  
16AX 250V~ EXP 1M  
without button*



**72103**  
Sklopka naizmenična  
16AX 250V~ EXP 1M  
bez tastera  
*2 way switch  
16AX 250V~ EXP 1M  
without button*



**72107**  
Sklopka jednopolna 16AX 250V~ EXP  
1M sa priključkom na nulti provodnik  
(indikacija sa kontaktima) bez tastera  
*1 way switch 16AX 250V~ EXP 1M with  
connection for the neutral conductor  
(indication with contacts) without button*



**72104**  
Sklopka ukrnsna  
16AX 250V~ EXP 1M  
bez tastera  
*Intermediate switch  
16AX 250V~ EXP 1M  
without button*



**72105**  
Sklopka jednopolna 16AX 250V~  
EXP 1M sa priključkom za nulti  
provodnik (indikatorska) bez tastera  
*1 way switch 16AX 250V~ EXP 1M  
with connection for the neutral conductor  
(with indicator) without button*



**72106**  
Sklopka dvopolna  
10AX 250V~ EXP 1M  
bez tastera  
*2 pole switch  
10AX 250V~ EXP 1M  
without button*



**72111**  
Taster sklopka jednopolna  
16AX 250V~ EXP 1M bez tastera  
*Push-button switch 16AX 250V~  
EXP 1M without button*



### 72117.x

Potezna taster  
sklopka jednopolna  
16AX 250V~ EXP 1M  
*Push-button  
1 way with cord  
16AX 250V~ EXP 1M*

Bela White	<b>x = 0</b>
Crna soft Soft black	<b>x = E1</b>
Silver Silver	<b>x = S</b>
Krem Beige	<b>x = 9</b>



- Za indikaciju kada je sklopka uključena
- Za indikaciju kada je sklopka isključena
- For indication when the switch is on
- For indication when the switch is off

## LED INDIKATORSKA SVETLA LED INDICATION LAMPS



**72181.4**  
LED indikacija 230V~  
sa kontaktima  
(za indikaciju) EXP,  
crveno  
*LED lamp 230V~  
with contacts  
(for indication) EXP,  
red*

- Koristi se za indikaciju kada je sklopka isključena  
(jednopolna sklopka, taster sklopka i naizmenična sklopka sa indikacijom)




**72181.5**  
LED indikacija 230V~  
sa kontaktima  
(za indikaciju) EXP,  
plavo  
*LED lamp 230V~  
with contacts  
(for indication) EXP,  
blue*

- Used for indication when the switch is off  
(1 way switch, push - button switch and 2 way switch)



**72183.4**  
LED indikacija 24V~  
sa kontaktima  
(za indikaciju) EXP,  
crveno  
*LED lamp 24V~  
with contacts  
(for indication) EXP,  
red*

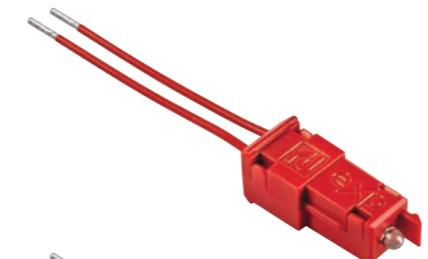


**72182.4**  
LED indikacija 230V~  
sa provodnicima  
(za indikaciju) EXP,  
crveno  
*LED lamp 230V~  
with conductors  
(for indication) EXP,  
red*




**72182.0**  
LED indikacija 230V~  
sa provodnicima  
(za indikaciju) EXP,  
belo  
*LED lamp 230V~  
with conductors  
(for indication) EXP,  
white*


- Koristi se za indikaciju kada je sklopka uključena  
(jednopolna sa priključkom za nulti provodnik, dvopolna)
- Koristi se za indikaciju kada je sklopka isključena (ukrsna)

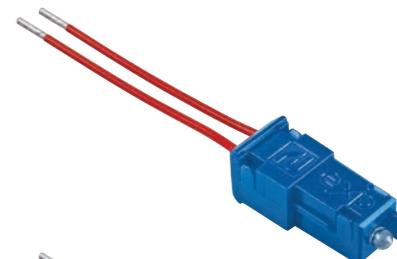


**72182.5**  
LED indikacija 230V~  
sa provodnicima  
(za indikaciju) EXP,  
plavo  
*LED lamp 230V~  
with conductors  
(for indication) EXP,  
blue*

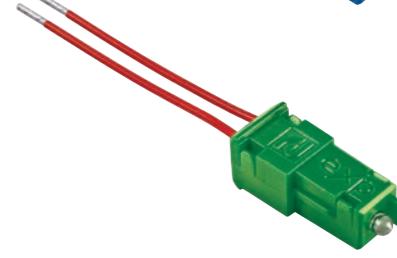


**72182.12**  
LED indikacija 230V~  
sa provodnicima  
(za indikaciju) EXP,  
zeleno  
*LED lamp 230V~  
with conductors  
(for indication) EXP,  
green*

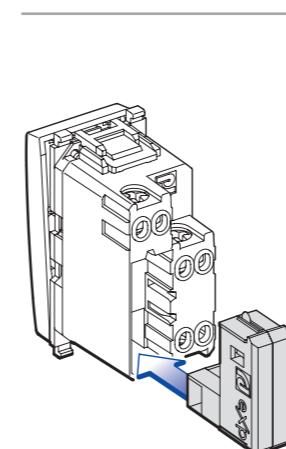

- Taster sklopka, jednopolna  
i naizmenična sklopka  
sa indikacijom koriste indikaciju sa kontaktima  
koja je jednostavno utisne u ležište (vidi sliku)
- Push - button switch,  
1 way switch and 2 way switch  
with indication are using LED lamp with contacts  
that is simply pressed into bearing (see image)

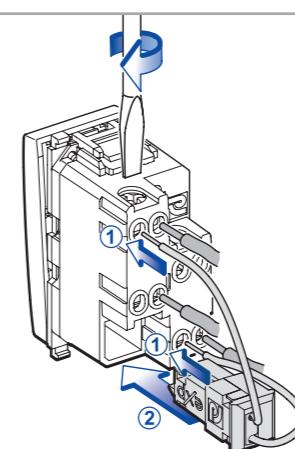

- Za jednopolnu sklopku sa priključkom za nulti provodnik  
koristi se LED indikacija sa provodnicima. Provodnici se  
postave zajedno sa instalacionim provodnicima (1)  
i potom se indikacija utisne u ležište (2)
- 1 way switch with connection for the neutral conductor  
is using LED lamp with conductors. Conductors are placed  
together with installation conductors (1) and then indication  
is pressed into the bearing (2)

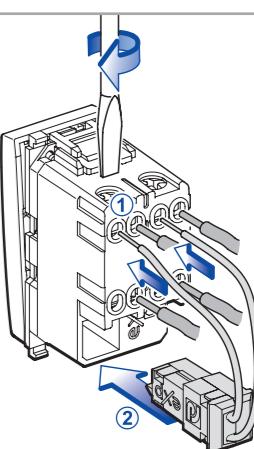

- Za dvopolnu i ukrnsnu sklopku koristi se LED  
indikacija sa provodnicima. Provodnici se  
postave zajedno sa instalacionim provodnicima (1)  
i potom se indikacija utisne u ležište (2)
- 2 pole switch and intermediate switch  
are using LED lamp with conductors. Conductors are placed  
together with installation conductors (1) and then indication is  
pressed into the bearing (2)


**experience**

## TASTERI SWITCH BUTTONS

Bela White	x = 0
Crna soft Soft black	x = E1
Silver Silver	x = S
Krem Beige	x = 9

**experience**

## TASTERI SA UGRAVIRANIM SIMBOLIMA SWITCH BUTTONS ENGRAVED WITH THE SYMBOLS

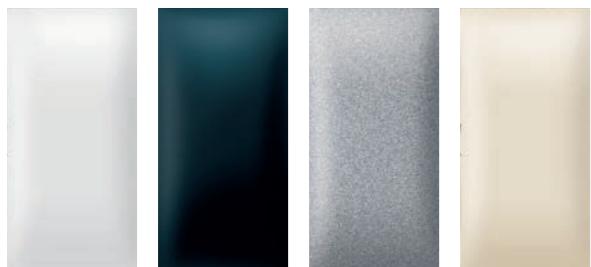

### 73101.x 1M

Taster EXP 1M  
Button EXP 1M


- Taster 1M širine 22,2mm,
- Taster 2M širine 44,4mm
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem
- Button 1M width 22,2mm,
- Button 2M width 44,4mm
- For switches without indication;
- Installation onto the switch by pressing



### 73301.x 2M

Taster EXP 2M  
Button EXP 2M

EXP 1M	73104.x	73105.x	73106.x	73107.x	73102.x	73102.x
<b>EXP 2M</b>	<b>73304.x</b>	<b>73305.x</b>	<b>73306.x</b>	<b>73307.x</b>	<b>73302.x</b>	<b>73303.x</b>
sa oznakom with symbol	pojačavanja amplification	ključa key	0-I 0-I	posluge servants	strelica gore arrow up	strelica dole arrow down
• Taster 1M širine 22,2mm,						
• Taster 2M širine 44,4mm						
• Za sklopke bez indikacije;						
• Ugradnja na sklopku utiskivanjem						
• Button 1M width 22,2mm,						
• Button 2M width 44,4mm						
• For switches without indication;						
• Installation onto the switch by pressing						

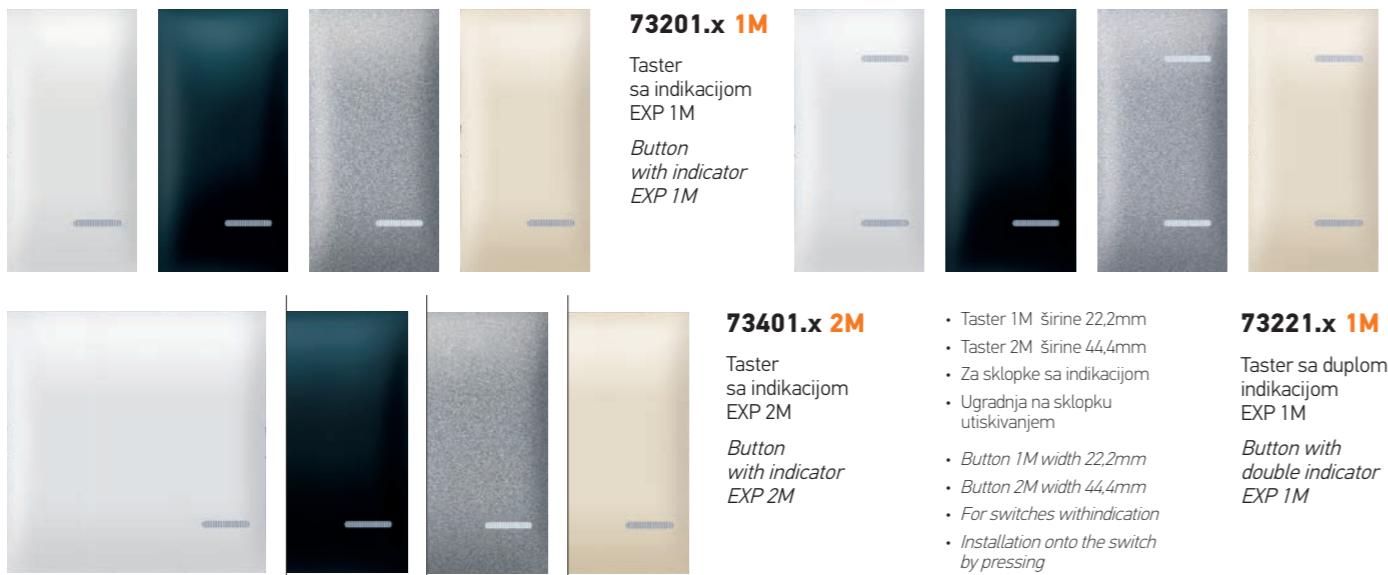


### 73201.x 1M

Taster sa indikacijom  
EXP 1M  
Button with indicator  
EXP 1M



### 73401.x 2M

Taster sa indikacijom  
EXP 2M  
Button with indicator  
EXP 2M

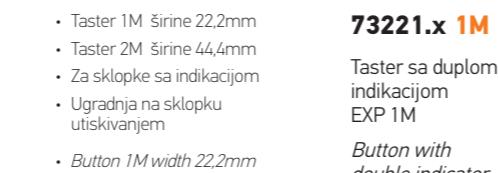

- Taster 1M širine 22,2mm
- Taster 2M širine 44,4mm
- Za sklopke sa indikacijom
- Ugradnja na sklopku utiskivanjem
- Button 1M width 22,2mm
- Button 2M width 44,4mm
- For switches with indication
- Installation onto the switch by pressing

- Taster sa duplom indikacijom EXP 1M
- Button with double indicator EXP 1M

EXP 1M	73202.x	73203.x	73204.x	73205.x	73206.x	73207.x	73208.x	73209.x	73222.x
<b>EXP 2M</b>	<b>73402.x</b>	<b>73403.x</b>	<b>73404.x</b>	<b>73405.x</b>	<b>73406.x</b>	<b>73407.x</b>	<b>73408.x</b>	<b>73409.x</b>	
sa indikacijom i oznakom with indicator and symbol	svetla light	zvona bell	bojlera boiler	grejalice heater	ventilatora fan	priklučnice socket	priključnice washing machine	veš mašine shower	roletne shutters
• Taster 1M širine 22,2mm									
• Taster 2M širine 44,4mm									
• Za sklopke sa indikacijom									
• Ugradnja na sklopku utiskivanjem									
• Button 1M width 22,2mm									
• Button 2M width 44,4mm									
• For switches with indication									
• Installation onto the switch by pressing									



### 70001.x

Poklopac maske  
(slepi modul) EXP 1M  
Blank module  
EXP 1M

- Za pokrivanje mesta gde nedostaje modul
- Pokriva širinu jednog modula 22,2mm
- Ugradnja u noseću prirubnicu utiskivanjem
- For covering the places where module is missing
- Covers the width of one module 22,2mm
- Installation into the holding frame by pressing

### 70002.x

Poklopac maske  
(slepi modul) EXP 2M  
Blank module  
EXP 2M

- Za pokrivanje mesta gde nedostaje modul
- Pokriva širinu dva modula 44,4mm
- Ugradnja u noseću prirubnicu utiskivanjem
- For covering the places where module is missing
- Covers the width of two module 44,4mm
- Installation into the holding frame by pressing

- Taster se zakači na jednu stranu tipkala, a druga strana se lagano pritisne da klikne taster.


**Napomena:**

- kod tastera sa indikacijom voditi računa o položaju indikacije (vidi sliku 1 i 2)
- stavljanje tastera je jednostavnije ukoliko se prvo zakači na podignutoj strani tipkala (kao na slici 1 i 2)
- Taster 2M poseduje nosač koji je sastavni deo tastera 2M; zajedno sa postavljanjem tastera 2M potrebno je utisnuti u nosač u prirubnicu (slika 2)


- The button is hooked to one side of switch, and the other side is lightly pressed until button is clicked.

**Note:**

- At buttons with indication pay attention of the position of indication (see picture 1 and 2)
- placing the button is easier if first snap to the raised side of the buttons (see picture 1 and 2)
- Button 2M has a carrier which is an integral part of button 2M; along with setting of button 2M it is necessary to press-in holder into the mounting frame (picture 2)



Slika 1  
Picture 1



Slika 2  
Picture 2



**experience**

## SKLOPKE ZA ROLETNE SWITCHES FOR SHUTTERS



- Par taster sklopki povezanih za upravljanje kretanjem elektromotora za roletne u dva smjera
- A pair of connected push-button switches for the control of shutters' electric motor movement in two directions

Bela White	x = 0
Crna soft Soft black	x = E1
Silver Silver	x = S
Krem Beige	x = 9

**experience**

## ELEKTRONIKA ELECTRONICS



**72108.x**  
Sklopka za roletne 10AX 250V~ EXP 1M  
Shutters switch 10A 250v~ EXP 1M

- za upravljanje kretanjem elektromotora za roletne u dva smjera
- tri stabilna položaja I-0-I
- for control of shutters' electric motor movement in two directions
- three stable positions I-0-I



**72201.x**  
Elektronski regulator 40-300VA EXP 1M  
Dimmer rotative 40-300VA EXP 1M

- Za sijalice sa užarenim vlačnom i halogene sijalice sa standardnim transformatorom 230V- 40-300W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija

- For the incandescent lamps and halogen lamps with standard transformer 230V- 40-300W;
- For halogen lamps with standard transformer 40-300VA;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication



**72202.x**  
Elektronski regulator sa naizmjeničnom sklopkom EXP 1M, 40-300VA  
Dimmer with alternative switch EXP 1M, 40-300VA

- Za sijalice sa užarenim vlačnom i halogene sijalice sa standardnim transformatorom 230V- 40-300W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija

- For the incandescent lamps and halogen lamps with standard transformer 230V- 40-300W;
- For halogen lamps with standard transformer 40-300VA;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication



**72204.x**  
Elektronski regulator za induktivno opterećenje, EXP 1M, 40-300VA  
Dimmer for inductive load, EXP 1M 40-300VA

- Za sijalice sa užarenim vlačnom i halogene sijalice 230V- 40-500W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Za halogene sijalice sa elektronskim transformatorom 40-200VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija uklučenosti

- For the incandescent lamps and halogen lamps 230V- 40-500W;
- For halogen lamps with standard transformer 40-300VA;
- For halogen lamps with electronic transformer 40-200VA;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication when dimmer is ON



**72205.x**  
Elektronski regulator za LED, EXP 1M, 200W  
Dimmer for LED, EXP 1M, 200W

- Univerzalni taster elektronski regulator za sve vrste sijalica;
- Osnovna namena za CFL i LED dimabilne sijalice do 200W;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija

- Universal push-button dimmer for all types of bulbs;
- The main purpose for dimmable CFL and LED bulbs up to 200W;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication

**experience**


## ELEKTRONIKA ELECTRONICS



**72203.x**

Infracrveni detektor pokreta EXP 2M 500W, 230V~/50Hz

Infrared motion detector EXP 2M 500W, 230V-/50Hz

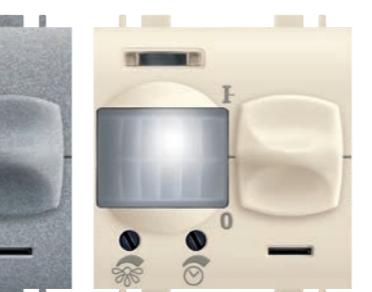

**72206.x**

Elektronski regulator sa rotacionom sklopkom EXP 1M, 800W

Dimmer rotative 800W EXP 1M

- Za sijalice sa užarenim vlačnom i halogene sijalice sa standardnim transformatorom 230V- 40-300W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija

- For the incandescent lamps and halogen lamps with standard transformer 230V- 40-300W;
- For halogen lamps with standard transformer 40-300VA;
- Complied with IEC 60669-2-1;
- Installation into the mounting frame by pressing;
- Indication

NOVO  
NEW



# experience

## SET SKLOPKI ZA KUPATILO BATHROOM SWITCH-SET

- Usaglašeno sa IEC 60669-1;
- Ugradnja u montažnu kutiju pomoću vijaka
- Complied with IEC 60669-1;
- Installation into the mounting box by screws

**72303.00**

Set sklopki za kupatilo 3x16A 250V~ sa indikacijom i kutijom 3M, horizontalno (svetlo, grejalica, boiler) EXP  
*Bathroom switch set 3x16AX 250V~ with indicator and mounting box 3M horizontal (light, heater, boiler) EXP*

**72304.00**

Set sklopki za kupatilo 4x16A 250V~ sa indikacijom i kutijom 4M, horizontalno (svetlo, ventilator, grejalica, boiler) EXP  
*Bathroom switch set 4x16AX 250V~ with indicator and mounting box 4M horizontal (light, fan, heater, boiler) EXP*

**72306.00**


Set sklopki za kupatilo 3x16A 250V~ sa indikacijom i kutijom 2x2M, vertikalno (svetlo 2M, grejalica, boiler) EXP  
*Bathroom switch set 3x16AX 250V~ with indicator and mounting box 2x2M vertical (light 2M, heater, boiler) EXP*

**72308.00**


Set sklopki za kupatilo 4x16A 250V~ sa indikacijom i kutijom 2x2M, vertikalno (svetlo, ventilator, grejalica, boiler) EXP  
*Bathroom switch set 4x16AX 250V~ with indicator and mounting box 2x2M vertical (light, fan, heater, boiler) EXP*

**72310.00**


Set sklopki za kupatilo 3x16A 250V~ sa indikacijom - **UNIVERZALNI**, horizontalno (svetlo, grejalica, boiler) EXP  
*Bathroom switch set 3x16AX 250V~ with indicator - UNIVERZALNI, horizontal (light, heater, boiler) EXP*

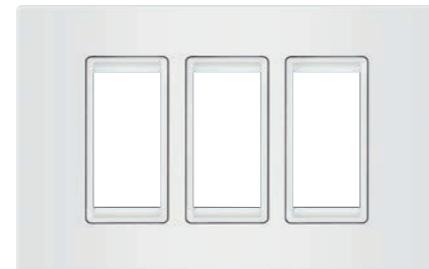**70131.00**

Maska 3x1M za univerzalni kupatilski indikator EXP  
*Cover frame 3x1M for universal bathroom set EXP*

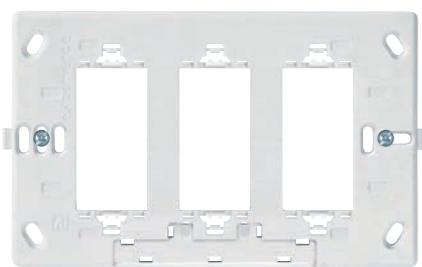**71131**

Prirubnica 3x1M EXP za univerzalni kupatilski indikator, sa vijcima  
*Mounting frame 3x1M EXP for universal bathroom set, with screws*

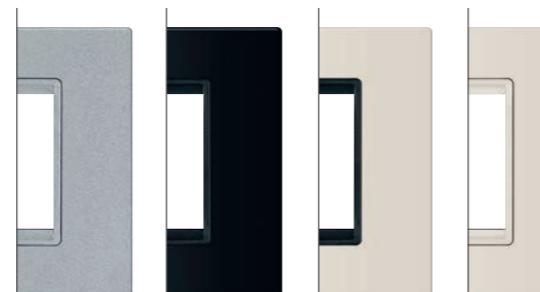
**70131.SS****70131.EE****70231.9****70231.99**

Univerzalno rešenje za montažu na već ugrađene kutije (od 108 - 135mm) ili na kutije veličine 4M. Visina maske iznosi 91,8mm


*Universal solution for mounting on existing mounting boxes (from 108 - 135mm) or on mounting boxes 4M. Decorative frame height is 91,8mm*

NOVO  
NEW


## UNIVERZALNI KUPATILSKI INDIKATORI UNIVERSAL BATHROOM SWITCH-SET

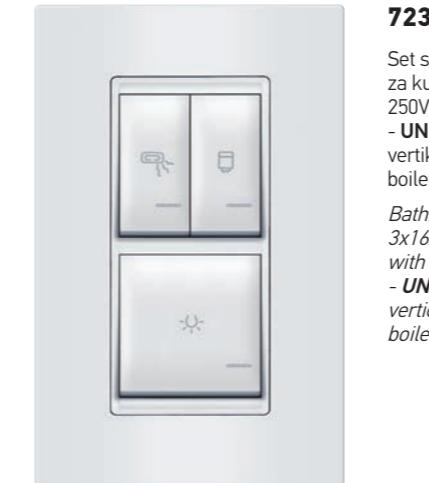**72323.00**

Set sklopki za kupatilo 3x16A 250V~ sa indikacijom - **UNIVERZALNI**, vertikalni (grejalica, boiler, svetlo 2M) EXP  
*Bathroom switch set 3x16AX 250V~ with indicator - UNIVERZALNI, vertical (heater, boiler, light 2M,) EXP*

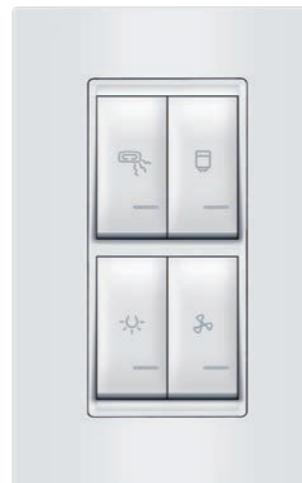**72324.00**

Set sklopki za kupatilo 4x16A 250V~ sa indikacijom - **UNIVERZALNI**, vertikalni (grejalica, boiler, svetlo, ventilator) EXP  
*Bathroom switch set 4x16AX 250V~ with indicator - UNIVERZALNI, vertical (heater, boiler, light, fan) EXP*

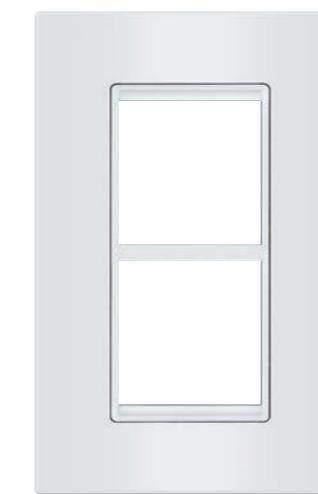**70144.00**

Maska 2x2M za univerzalni kupatilski indikator EXP  
*Cover frame 2x2M for universal bathroom set EXP*

**70144.SS****70144.EE****70244.9****70244.99****71144**

Prirubnica 2x2M EXP za univerzalni kupatilski indikator, sa vijcima  
*Mounting frame 2x2M EXP for universal bathroom set, with screws*

Univerzalno rešenje za montažu na već ugrađene kutije (od 108 - 135mm) ili na kutije veličine 4M.


*Universal solution for mounting on existing mounting boxes (from 108 - 135mm) or on mounting boxes 4M.*

PRIKLJUČNICE  
SOCKET OUTLETS

- Usaglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60884-1
- Installation into the mounting frame by pressing

**74101.x**

Priklučnica dvopolna  
16A 250V~ EXP 2M  
*2 pole socket outlet  
16A 250V~ EXP 2M*

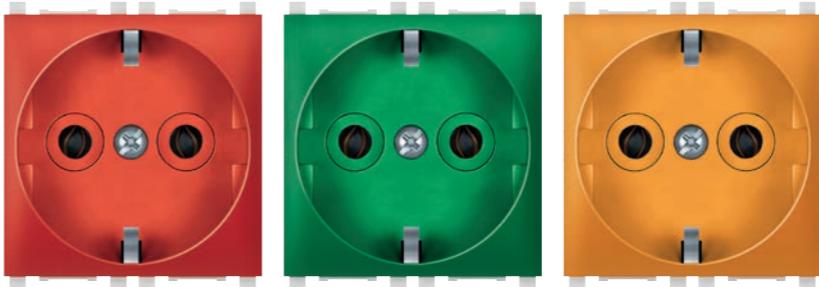**74101.4**

crveni blok  
*red block*

- Za mreže sa UPS (sa transformatorom)
- For power networks with UPS (with transformer)

**74101.12**


zeleni blok  
*green block*

- Za mreže sa zaštićenim generatorskim napajanjem preko transformatora
- For power networks with protected generator supply via transformer

**74101.N**

narandžasti blok  
*orange block*

- Za mreže sa generatorskim napajanjem preko transformatora
- For power networks with generator supply via transformer

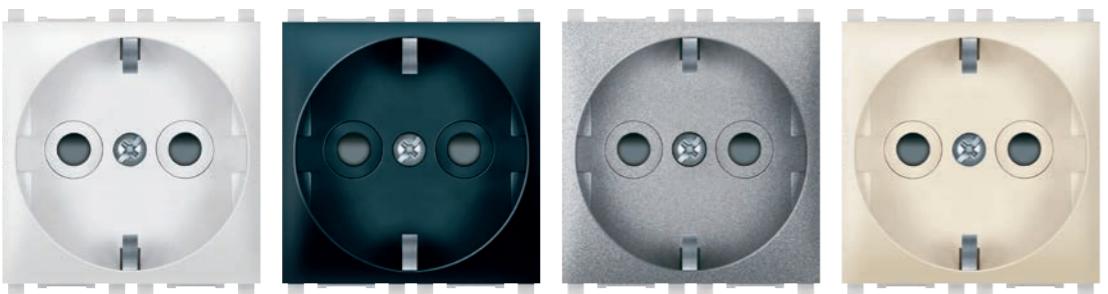**74102.x**

Priklučnica dvopolna sa zaštitom kontakata  
16A 250V~ EXP 2M  
*2 pole socket outlet with safety shutter  
16A 250V~ EXP 2M*

**74112.x**

Sklop dve priključnice dvopolne  
16A 250V~ EXP 2x2M premoštene  
*Sockets set  
16A 250V~ EXP 2x2M bridged*

- Premošteni skloovi priključnica
- Dovoljno je samo priključiti napojni kabel
- *Socket outlet assembly with bridged contact*
- *One need only connected cable*

**74103.xT**

Priklučnica dvopolna sa transparentnim poklopcom  
16A 250V~ EXP 2M  
*2 pole socket outlet with transparent cover  
16A 250V~ EXP 2M*

**74113.x**

Sklop tri priključnice dvopolne  
16A 250V~ EXP 3x2M premoštene  
*Sokets set  
16A 250V~ EXP 3x2M bridged*

**74104.xT**

Priklučnica dvopolna sa transparentnim poklopcom i zaštitom kontakata  
16A 250V~ EXP 2M  
*2 pole socket outlet with transparent cover and safety shutter  
16A 250V~ EXP 2M*

**74121.x**

Priklučnica dvopolna  
10A 250V~ EXP 1M,  
CEI 23-50/P11  
italijanska  
*2 pole socket outlet  
CEI 10A 250V~ EXP 1M*

**74121.4**

Priklučnica dvopolna  
10A 250V~ EXP 1M,  
CEI 23-50/P11  
italijanska, crvena  
*2 pole socket outlet  
10A 250V~ EXP 1M,  
CEI 23-50/P11  
italian type, red*

- Za mreže sa UPS (sa transformatorom)
- For power networks with UPS (with transformer)

**experience**

## PRIKLJUČNICE NERASTAVNE IN SEPARABLE SOCKET OUTLETS




### 74151.x

Priklučnica dvopolna nerastavna bez centralnog vijka 16A 250V~ EXP 2M

*2 pole socket outlet in separable without central screw 16A 250V~ EXP 2M*

- Usaglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60884-1
- Installation into the mounting frame by pressing

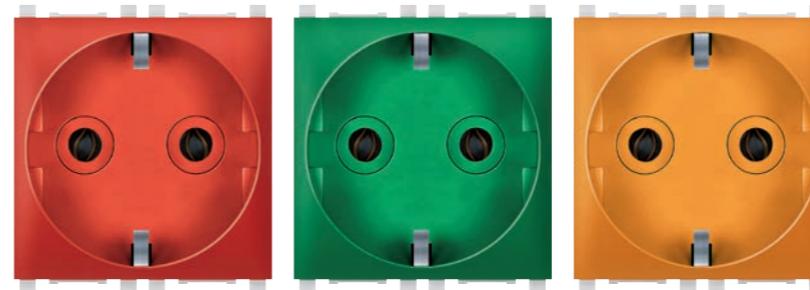

### 74151.4

crveni blok  
*red block*

- Za mreže sa UPS (sa transformatorom)
- For power networks with UPS (with transformer)

### 74151.12

zeleni blok  
*green block*

- Za mreže sa zaštićenim generatorskim napajanjem
- For power networks with protected generator supply via transformer

### 74151.N

narandžasti blok  
*orange block*

- Za mreže sa generatorskim napajanjem preko transformatora
- For power networks with generator supply via transformer



### 74152.x

Priklučnica dvopolna nerastavna bez centralnog vijka sa zaštitom kontakata 16A 250V~ EXP 2M

*2 pole socket outlet in separable without central screw with safety shutter 16A 250V~ EXP 2M*



### 74162.x


Sklop dve priključnice dvopolne 16A 250V~ EXP 2x2M premoštene

*Sockets set 16A 250V~ EXP 2x2M bridged*

- Premošteni skloovi priključnica
- Dovoljno je samo priključiti napojni kabel

*Socket outlet assembly with bridged contact*

*One need only connected cable*

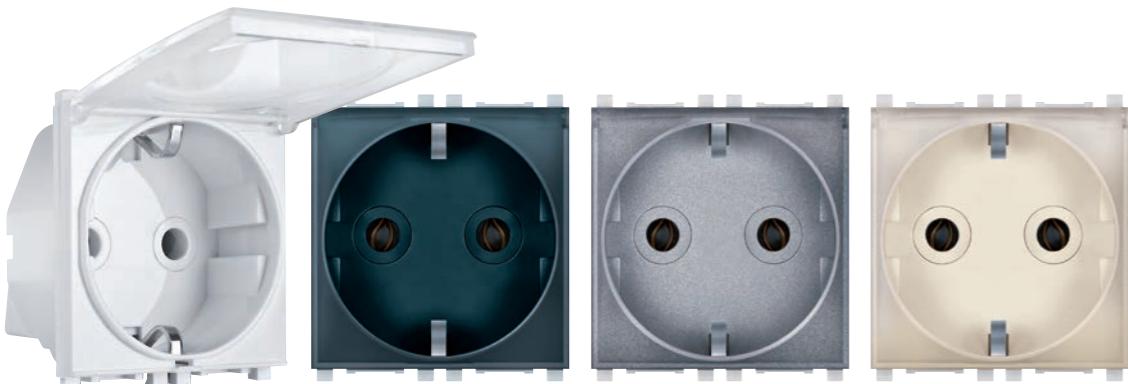

### 74153.xT

Priklučnica dvopolna nerastavna bez centralnog vijka sa transparentnim poklopcom 16A 250V~ EXP 2M


*2 pole socket outlet in separable without central screw with transparent cover 16A 250V~ EXP 2M*



### 74163.x

Sklop tri priključnice dvopolne 16A 250V~ EXP 3x2M premoštene

*Sockets set 16A 250V~ EXP 3x2M bridged*

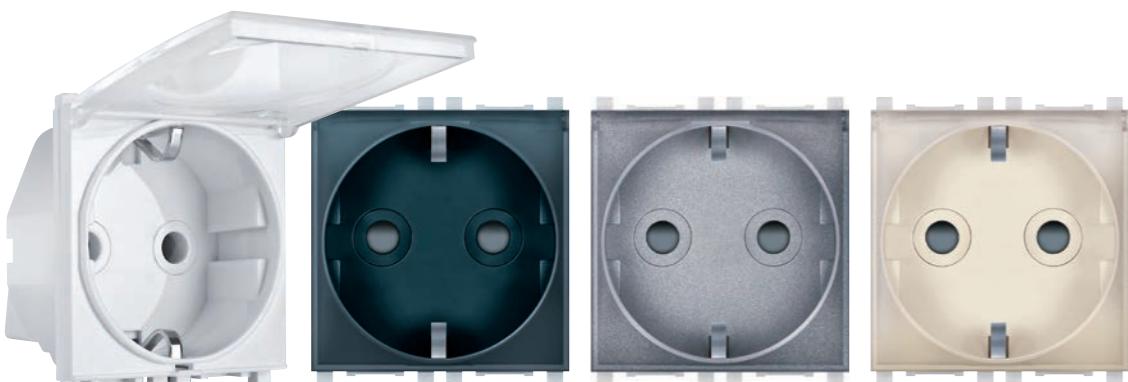

### 74154.xT

Priklučnica dvopolna nerastavna bez centralnog vijka sa transparentnim poklopcom i zaštitom kontakata 16A 250V~ EXP 2M

*2 pole socket outlet in separable without central screw with transparent cover and safety shutter 16A 250V~ EXP 2M*

**experience**

## KOMUNIKACIJE COMMUNICATIONS



**74211.x**

Priklučnica  
telefonska  
Keystone  
RJ12 6/4 Cat 3  
EXP 1M  
*Telephone  
socket Keystone  
RJ12 6/4 Cat3  
EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Priklučak za dve parice (linija + terminal);
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Connection for two pairs (line+terminal);
- Installation into the mounting frame by pressing



**74221.x**

Priklučnica  
komunikacijska  
Keystone  
RJ45 Cat 5e UTP  
EXP 1M  
*Data socket  
Keystone  
RJ45 Cat5e UTP  
EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting wire installation;
- Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;
- Installation into the mounting frame by pressing



**74212.x**

Priklučnica  
telefonska  
Keystone  
RJ12 6/6 Cat 3  
EXP 1M  
*Telephone  
socket Keystone  
RJ12 6/6 Cat3  
EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Za ISDN linije;
- Montaža provodnika bez upotrebe alata;
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- For ISDN lines;
- Toolless conducting wire installation;
- Installation into the mounting frame by pressing



**74222.x**

Priklučnica  
komunikacijska  
Keystone  
RJ45 Cat 5e FTP  
EXP 1M  
*Data socket  
Keystone  
RJ45 Cat5e FTP  
EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting wire installation;
- Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;
- Installation into the mounting frame by pressing



**74201.x**

Keystone  
nosač  
EXP 1M  
*Keystone  
holder  
EXP 1M*

- Modul širine 22,2mm za nošenje Keystone konektora
- Ugradnja u noseću prirubnicu utiskivanjem
- Module 22,2mm width for Keystone connectors holding
- Installation into the mounting frame by pressing



**74223.x**

Priklučnica  
komunikacijska  
Keystone  
RJ45 Cat 6 UTP  
EXP 1M  
*Data socket  
Keystone  
RJ45 Cat6 UTP  
EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting wire installation;
- Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;
- Installation into the mounting frame by pressing




**74303**

Modul  
Keystone  
Linkbasic  
RJ12  
6/4 Cat 3  
*Module  
Keystone  
Linkbasic  
RJ12  
6/4 Cat 3*




**74313**

Modul  
Keystone  
Linkbasic  
RJ12  
6/6 Cat 3  
*Module  
Keystone  
Linkbasic  
RJ12  
6/6 Cat 3*

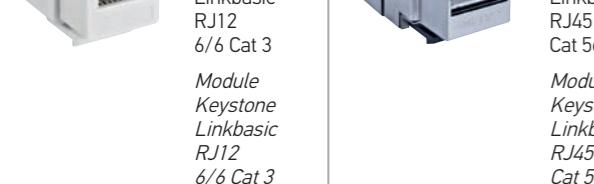


**74305**

Modul  
Keystone  
Linkbasic  
RJ45  
Cat 5e UTP  
*Module  
Keystone  
Linkbasic  
RJ45  
Cat 5e UTP*

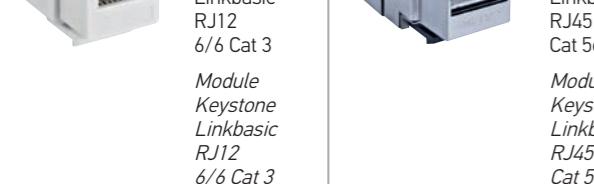


**74315**

Modul  
Keystone  
Linkbasic  
RJ45  
Cat 5e FTP  
*Module  
Keystone  
Linkbasic  
RJ45  
Cat 5e FTP*

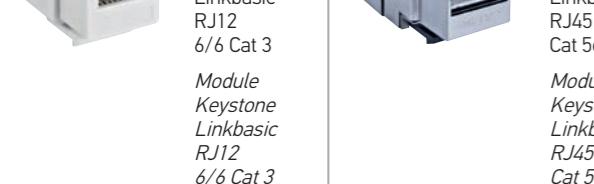


**74306**

Modul  
Keystone  
Linkbasic  
RJ45  
Cat 6 UTP  
*Module  
Keystone  
Linkbasic  
RJ45  
Cat 6 UTP*

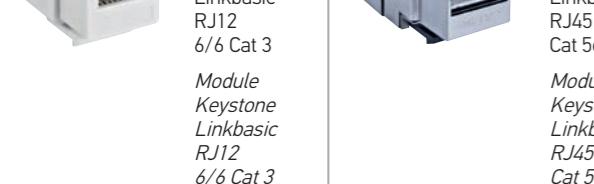


**74307**

Modul  
Keystone  
Linkbasic  
RJ45  
Cat 6 A UTP  
*Module  
Keystone  
Linkbasic  
RJ45  
Cat 6 A UTP*

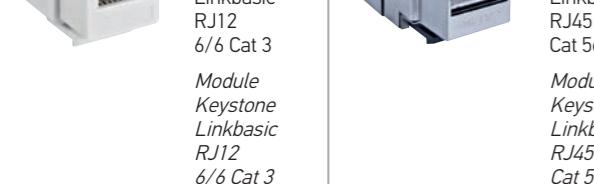

**74316**

Modul  
Keystone  
Linkbasic  
RJ45  
Cat 6 FTP  
*Module  
Keystone  
Linkbasic  
RJ45  
Cat 6 FTP*

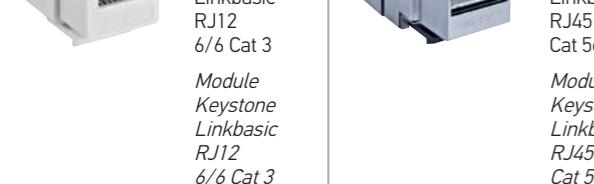

**74317**

Modul  
Keystone  
Linkbasic  
RJ45  
Cat 6 A FTP  
*Module  
Keystone  
Linkbasic  
RJ45  
Cat 6 A FTP*



**74225.x**

Priklučnica  
komunikacijska  
Keystone  
RJ45 Cat 6 A UTP  
EXP 1M  
*Data socket  
Keystone  
RJ45 Cat6A UTP  
EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting wire installation;
- Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;
- Installation into the mounting frame by pressing



**74226.x**

Priklučnica  
komunikacijska  
Keystone  
RJ45 Cat 6 A FTP  
EXP 1M  
*Data socket  
Keystone  
RJ45 Cat6A FTP  
EXP 1M*

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem
- Complied with IEC 60603-7;
- Toolless conducting wire installation;
- Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;
- Installation into the mounting frame by pressing

**experience**

## KOMUNIKACIJE COMMUNICATIONS



**74261.x**

Priklučnica antenska TV IEC M / F EXP 1M za individualne sisteme  
*TV aerial socket IEC M/F for individual systems EXP 1M*

- Usaglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 169-2 - M connector;
- Installation of aerial cable by F connector;
- Without signal attenuation; I
- nstallation into the mounting frame by pressing



**74262.x**

Priklučnica antenska FM IEC F / F EXP 1M  
*FM aerial socket IEC F/F EXP 1M*

- Usaglašeno sa IEC 169-2 - ženski konektor;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 169-2 - F connector;
- Installation of aerial cable by F connector;
- Without signal attenuation; I
- nstallation into the mounting frame by pressing



**74263.x**

Priklučnica antenska TV IEC završna 5dB EXP 1M  
*TV aerial socket end-line 5db IEC EXP 1M*

- Usaglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko vijčane veze;
- Prigušenje signala cca 5dB;
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 169-2 - M connector;
- Installation of aerial cable by screw terminals;
- Signal attenuation approx. 5dB;
- Installation into the mounting frame by pressing



**74264.x**

Priklučnica antenska TV prolazna 10dB IEC EXP 1M  
*TV aerial socket throughpass 10db IEC EXP 1M*

- Usaglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko vijčane veze;
- Prigušenje signala cca 10dB;
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 169-2 - M connector;
- Installation of aerial cable by screw terminals;
- Signal attenuation approx. 10dB;
- Installation into the mounting frame by pressing



**74265.x**

Priklučnica antenska TV F/F EXP 1M za individualne sisteme SAT  
*TV aerial socket F/F for individual systems EXP 1M*

- Završna za satelitske antene;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću prirubnicu utiskivanjem

- Terminal for satellite aerials;
- Installation of aerial cable by F connector;
- Without signal attenuation;
- Installation into the mounting frame by pressing



**74283.x**

Priklučnica USB punjač 2,1A 5V= EXP 2M  
*Power supply unit USB 2,1A 5V= EXP 2M*

- Za punjenje elektronskih uređaja putem standardnog USB porta;
- Punjenje dva uređaja istovremeno;
- Usaglašeno sa EN 60950-1 i EMC direktivom;
- Ugradnja u noseću prirubnicu utiskivanjem



**74289.x**

Priklučnica USB punjač 2,1A 5V= EXP 1M  
*Power supply unit USB 2,1A 5V= EXP 1M*

- Za punjenje elektronskih uređaja putem standardnog USB porta;
- Usaglašeno sa EN 60950-1 i EMC direktivom;
- Ugradnja u noseću prirubnicu utiskivanjem

**NOVO**  
NEW



**74284.x**

Priklučnica USB EXP 1M  
*USB socket EXP 1M*

- Za konekciju USB uređaja i kablova;
- Podržava USB 2.0 standard;
- Ugradnja u noseću prirubnicu utiskivanjem

- For charging of electronic devices via standard USB port;
- Enables charging of two devices simultaneously;
- Complied with EN 60950-1 and EMC directive;
- Installation into the mounting frame by pressing



**74285.x**

Priklučnica HDMI EXP 1M  
*HDMI socket EXP 1M*

- Za konekciju kablova za prenos signala preko HDMI priključka;
- Ugradnja u noseću prirubnicu utiskivanjem

- For the transmission of signal through HDMI connector;
- Installation into the mounting frame by pressing



**74281.x**

Priklučnica audio 2xRCA EXP 1M  
*Audio socket 2XRCA EXP 1M*

- Za prenos audio signala - stereo;
- Montaža provodnika lemljenjem;
- Ugradnja u noseću prirubnicu utiskivanjem

- For the transmission of audio signals stereo;
- Installation of conducting wires by soldering;
- Installation into the mounting frame by pressing



**74282.x**

Priklučnica audio/video BNC/BNC EXP 1M  
*Audio/video socket BNC/BNC EXP 1M*

- Za prenos audio ili video signala;
- Montaža kabla preko BNC konektora;
- Ugradnja u noseću prirubnicu utiskivanjem

- For the transmission of audio or video signals;
- Installation of cable by BNC connector;
- Installation into the mounting frame by pressing

# experience

## DEKORATIVNE MASKE DECORATIVE FRAMES

### BASIC



BELA MASKA / BELI NOSAČ  
WHITE FRAME / WHITE HOLDER



CRNA MASKA / CRNI NOSAČ  
BLACK FRAME / BLACK HOLDER



SILVER MASKA / SILVER NOSAČ  
SILVER FRAME / SILVER HOLDER



VIVID MASKE  
VIVID FRAMES



METALLIC MASKE  
METALLIC FRAMES



SOFT TOUCH MASKE  
SOFT TOUCH FRAMES



BELA MASKA / CRNI NOSAČ  
WHITE FRAME / BLACK HOLDER



CRNA MASKA / BELI NOSAČ  
BLACK FRAME / WHITE HOLDER



SILVER MASKA / BELI NOSAČ  
SILVER FRAME / WHITE HOLDER



BELA MASKA / SILVER NOSAČ  
WHITE FRAME / SILVER HOLDER



CRNA MASKA / SILVER NOSAČ  
BLACK FRAME / SILVER HOLDER



SILVER MASKA / CRNI NOSAČ  
SILVER FRAME / BLACK HOLDER



DRVENE MASKE  
WOODEN FRAMES



STAKLENE MASKE  
GLASS FRAMES




METALNE MASKE  
METAL TOUCH FRAMES

**experience**

**BASIC  
BELA / WHITE**

Ultimativna elegancija i prozračnost  
ogledaju se u geometriji oblika i  
odsjaju površina i kreiraju novu  
definiciju stila

*Ultimate elegance and lightness are  
reflected in the geometry of shapes  
and glossy surface to create a new  
definition of style*

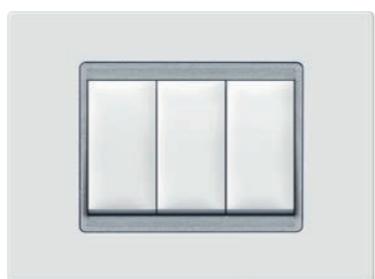

**BASIC****BELA MASKA / BELI NOSAČ  
WHITE FRAME / WHITE HOLDER**

- Ugradnja na noseču prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;

**70101.00**Maska 1M EXP BASIC,  
bela sa belim nosačem*Cover frame 1M EXP BASIC,  
white with white holder*

97,6 x 91,8 mm

**70102.00**Maska 2M EXP BASIC,  
bela sa belim nosačem*Cover frame 2M EXP BASIC,  
white with white holder*

97,6 x 91,8 mm

**70123.00**Maska 2/3M EXP BASIC,  
bela sa belim nosačem*Cover frame 2/3M EXP BASIC,  
white with white holder*

120 x 91,8 mm

**70103.00**Maska 3M EXP BASIC,  
bela sa belim nosačem*Cover frame 3M EXP BASIC,  
white with white holder*

120 x 91,8 mm

**70104.00**Maska 4M EXP BASIC,  
bela sa belim nosačem*Cover frame 4M EXP BASIC,  
white with white holder*


142,4 x 91,8 mm

**70106.00**Maska 6M EXP BASIC,  
bela sa belim nosačem*Cover frame 6M EXP BASIC,  
white with white holder*


187,2 x 91,8 mm

**70107.00**Maska 7M EXP BASIC,  
bela sa belim nosačem*Cover frame 7M EXP BASIC,  
white with white holder*


209,6 x 91,8 mm

**70162.00**Maska 3x2M EXP  
BASIC, vertikalna,  
bela sa belim nosačem*Cover frame 3x2M EXP  
BASIC, vertical,  
white with white holder*


97,6 x 233,8 mm

**70142.00**Maska 2x2M EXP  
BASIC, vertikalna,  
bela sa belim nosačem*Cover frame 2x2M EXP  
BASIC, vertical,  
white with white holder*


97,6 x 162,8 mm

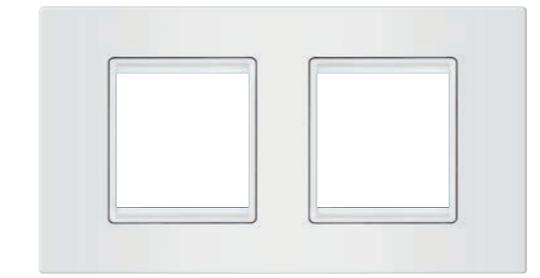**70122.00**Maska 2x2M EXP BASIC,  
horizontalna, bela sa belim nosačem*Cover frame 2x2M EXP BASIC,  
horizontal, white with white holder*







168,6 x 91,8 mm

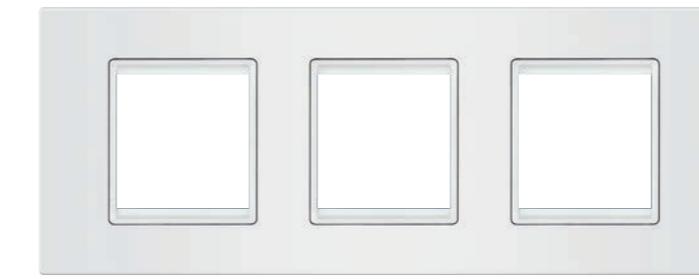**70132.00**Maska 3x2M EXP BASIC,  
horizontalna, bela sa belim nosačem*Cover frame 3x2M EXP BASIC,  
horizontal, white with white holder*

239,6 x 91,8 mm

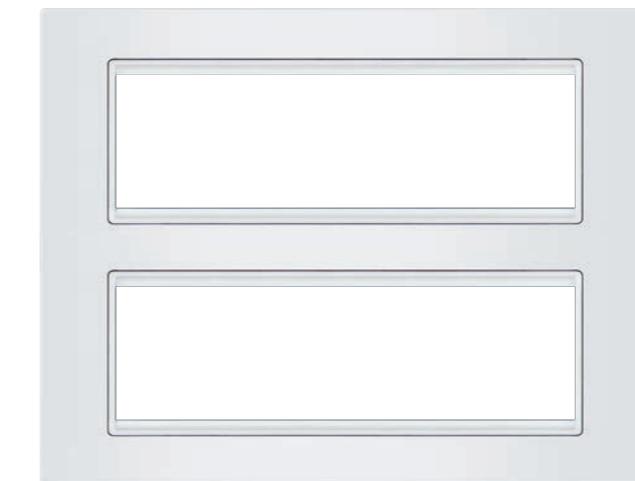**70127.00**Maska 2x7M EXP BASIC,  
bela sa belim nosačem*Cover frame 2x7M EXP BASIC,  
white with white holder*

209,6 x 162,8 mm

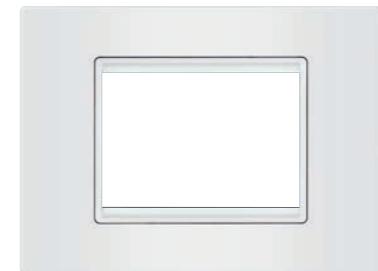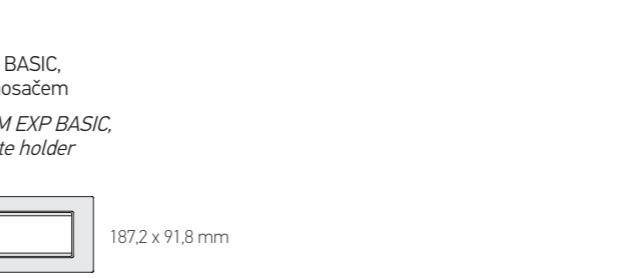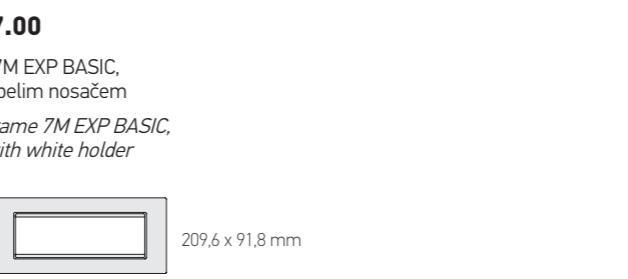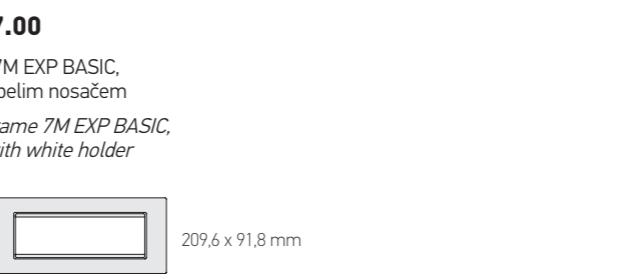**70101.00**Maska 1M EXP BASIC,  
bela sa belim nosačem*Cover frame 1M EXP BASIC,  
white with white holder***70102.00**Maska 2M EXP BASIC,  
bela sa belim nosačem*Cover frame 2M EXP BASIC,  
white with white holder***70123.00**Maska 2/3M EXP BASIC,  
bela sa belim nosačem*Cover frame 2/3M EXP BASIC,  
white with white holder***70103.00**Maska 3M EXP BASIC,  
bela sa belim nosačem*Cover frame 3M EXP BASIC,  
white with white holder***70104.00**Maska 4M EXP BASIC,  
bela sa belim nosačem*Cover frame 4M EXP BASIC,  
white with white holder***70106.00**Maska 6M EXP BASIC,  
bela sa belim nosačem*Cover frame 6M EXP BASIC,  
white with white holder***70107.00**Maska 7M EXP BASIC,  
bela sa belim nosačem*Cover frame 7M EXP BASIC,  
white with white holder*



**experience**

**BASIC**

**BELA MASKA / CRNI NOSAČ  
WHITE FRAME / BLACK HOLDER**

- Ugradnja na noseču prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;

**70101.0E**

Maska 1M EXP BASIC,  
bela sa crnim nosačem  
*Cover frame 1M EXP BASIC,  
white with black holder*



**70102.0E**

Maska 2M EXP BASIC,  
bela sa crnim nosačem  
*Cover frame 2M EXP BASIC,  
white with black holder*



**70123.0E**

Maska 2/3M EXP BASIC,  
bela sa crnim nosačem  
*Cover frame 2/3M EXP BASIC,  
white with black holder*



**70103.0E**

Maska 3M EXP BASIC,  
bela sa crnim nosačem  
*Cover frame 3M EXP BASIC,  
white with black holder*



**70104.0E**

Maska 4M EXP BASIC,  
bela sa crnim nosačem  
*Cover frame 4M EXP BASIC,  
white with black holder*



**70106.0E**

Maska 6M EXP BASIC,  
bela sa crnim nosačem  
*Cover frame 6M EXP BASIC,  
white with black holder*



**70107.0E**

Maska 7M EXP BASIC,  
bela sa crnim nosačem  
*Cover frame 7M EXP BASIC,  
white with black holder*




**70162.0E**

Maska 3xM EXP BASIC, vertikalna,  
bela sa crnim nosačem  
*Cover frame 3xM EXP BASIC, vertical,  
white with black holder*



**70142.0E**

Maska 2xM EXP BASIC, vertikalna,  
bela sa crnim nosačem  
*Cover frame 2xM EXP BASIC, vertical,  
white with black holder*




**70122.0E**

Maska 2x2M EXP BASIC,  
horizontalna, bela sa crnim nosačem  
*Cover frame 2x2M EXP BASIC,  
horizontal, white with black holder*




**70132.0E**

Maska 3x2M EXP BASIC,  
horizontalna, bela sa crnim nosačem  
*Cover frame 3x2M EXP BASIC,  
horizontal, white with black holder*



**70127.0E**

Maska 2x7M EXP BASIC,  
bela sa crnim nosačem  
*Cover frame 2x7M EXP BASIC,  
white with black holder*

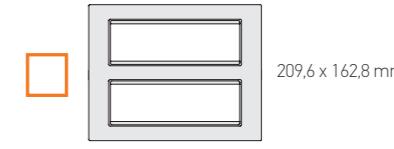



**experience**

**BASIC**

**BELA MASKA / SILVER NOSAČ**  
**WHITE FRAME / SILVER HOLDER**

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;

**70101.0S**

Maska 1M EXP BASIC,  
bela sa silver nosačem  
*Cover frame 1M EXP BASIC,  
white with silver holder*



97,6 x 91,8 mm

**70102.0S**

Maska 2M EXP BASIC,  
bela sa silver nosačem  
*Cover frame 2M EXP BASIC,  
white with silver holder*



97,6 x 91,8 mm

**70123.0S**

Maska 2/3M EXP BASIC,  
bela sa silver nosačem  
*Cover frame 2/3M EXP BASIC,  
white with silver holder*



120 x 91,8 mm

**70103.0S**

Maska 3M EXP BASIC,  
bela sa silver nosačem  
*Cover frame 3M EXP BASIC,  
white with silver holder*



120 x 91,8 mm

**70104.0S**

Maska 4M EXP BASIC,  
bela sa silver nosačem  
*Cover frame 4M EXP BASIC,  
white with silver holder*



142,4 x 91,8 mm

**70106.0S**


Maska 6M EXP BASIC,  
bela sa silver nosačem  
*Cover frame 6M EXP BASIC,  
white with silver holder*



187,2 x 91,8 mm

**70107.0S**

Maska 7M EXP BASIC,  
bela sa silver nosačem  
*Cover frame 7M EXP BASIC,  
white with silver holder*



209,6 x 91,8 mm

**70162.0S**


Maska 3xM EXP BASIC, vertikalna,  
bela sa silver nosačem  
*Cover frame 3xM EXP BASIC, vertical,  
white with silver holder*



97,6 x 233,8 mm

**70142.0S**


Maska 2xM EXP BASIC, vertikalna,  
bela sa silver nosačem  
*Cover frame 2xM EXP BASIC, vertical,  
white with silver holder*



97,6 x 162,8 mm

**70122.0S**

Maska 2x2M EXP BASIC,  
horizontalna, bela sa silver nosačem  
*Cover frame 2x2M EXP BASIC,  
horizontal, white with silver holder*



168,6 x 91,8 mm

**70132.0S**


Maska 3x2M EXP BASIC,  
horizontalna, bela sa silver nosačem  
*Cover frame 3x2M EXP BASIC,  
horizontal, white with silver holder*



239,6 x 91,8 mm

**70127.0S**

Maska 2x7M EXP BASIC,  
bela sa silver nosačem  
*Cover frame 2x7M EXP BASIC,  
white with silver holder*



209,6 x 162,8 mm

# experience

## BASIC CRNA / BLACK



Snaga crne boje ogleda se u smelim kombinacijama koje će Vašem prostoru dati dozu ekstravagancije

*Power of black reflects in daring combinations that will give your space a dose of extravagance*





**experience**

## BASIC

### CRNA MASKA / CRNI NOSAČ BLACK FRAME / BLACK HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;



**70101.EE**

Maska 1M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 1M EXP BASIC,  
black with black holder*



97,6 x 91,8 mm



**70102.EE**

Maska 2M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 2M EXP BASIC,  
black with black holder*




97,6 x 91,8 mm



**70162.EE**

Maska 3x2M EXP BASIC, vertikalna,  
crna sa crnim nosačem

*Cover frame 3x2M EXP BASIC, vertical,  
black with black holder*



97,6 x 233,8 mm




**70142.EE**

Maska 2x2M EXP BASIC, vertikalna,  
crna sa crnim nosačem

*Cover frame 2x2M EXP BASIC, vertical,  
black with black holder*



97,6 x 162,8 mm

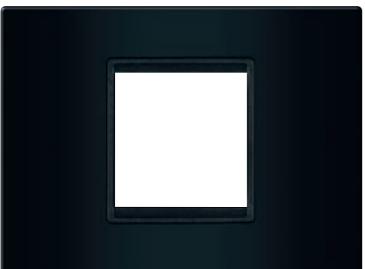


**70123.EE**

Maska 2/3M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 2/3M EXP BASIC,  
black with black holder*



120 x 91,8 mm

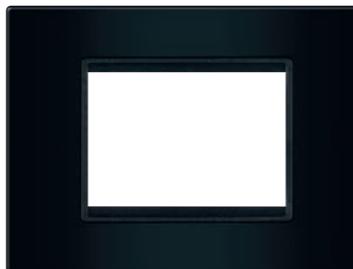


**70103.EE**

Maska 3M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 3M EXP BASIC,  
black with black holder*



120 x 91,8 mm

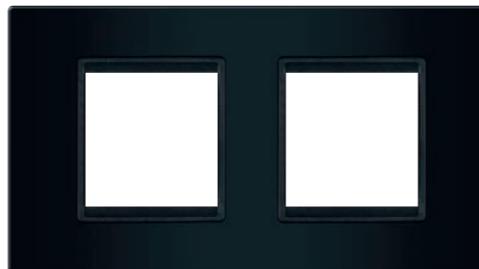


**70122.EE**

Maska 2x2M EXP BASIC,  
horizontalna, crna sa crnim nosačem

*Cover frame 2x2M EXP BASIC,  
horizontal, black with black holder*



168,6 x 91,8 mm

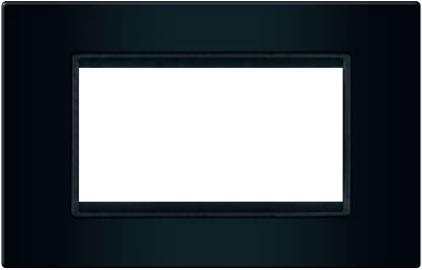

**70104.EE**

Maska 4M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 4M EXP BASIC,  
black with black holder*



142,4 x 91,8 mm




**70132.EE**

Maska 3x2M EXP BASIC,  
horizontalna, crna sa crnim nosačem

*Cover frame 3x2M EXP BASIC,  
horizontal, black with black holder*



239,6 x 91,8 mm

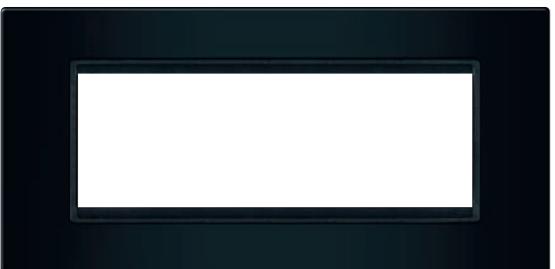


**70106.EE**

Maska 6M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 6M EXP BASIC,  
black with black holder*



187,2 x 91,8 mm

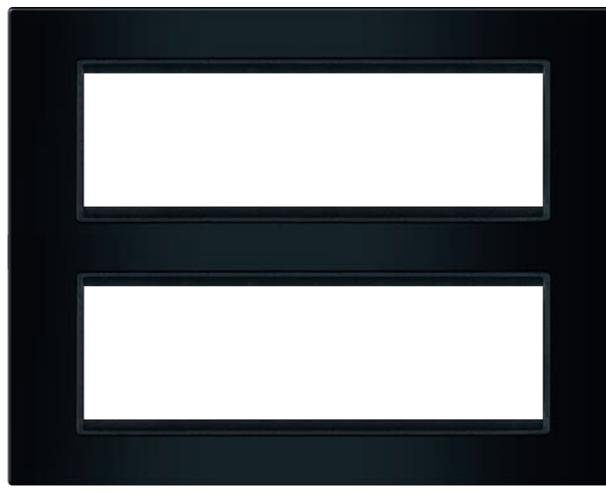


**70127.EE**

Maska 2x7M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 2x7M EXP BASIC,  
black with black holder*



209,6 x 162,8 mm

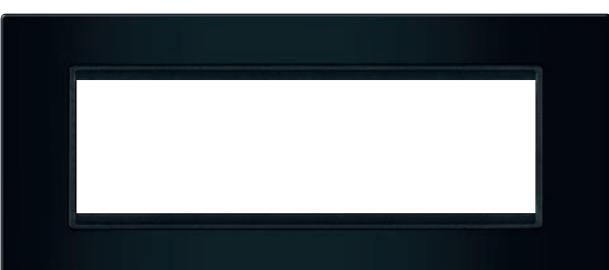

**70107.EE**

Maska 7M EXP BASIC,  
crna sa crnim nosačem

*Cover frame 7M EXP BASIC,  
black with black holder*



209,6 x 91,8 mm



**experience**

## BASIC

### CRNA MASKA / BELI NOSAČ BLACK FRAME / WHITE HOLDER

- Ugradnja na noseću prirbunicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;

#### 70101.E0

Maska 1M EXP BASIC,  
crna sa belim nosačem  
*Cover frame 1M EXP BASIC,  
black with white holder*



97,6 x 91,8 mm

#### 70102.E0

Maska 2M EXP BASIC,  
crna sa belim nosačem  
*Cover frame 2M EXP BASIC,  
black with white holder*



97,6 x 91,8 mm

#### 70123.E0

Maska 2/3M EXP BASIC,  
crna sa belim nosačem  
*Cover frame 2/3M EXP BASIC,  
black with white holder*



120 x 91,8 mm

#### 70103.E0

Maska 3M EXP BASIC,  
crna sa belim nosačem  
*Cover frame 3M EXP BASIC,  
black with white holder*



120 x 91,8 mm

#### 70104.E0

Maska 4M EXP BASIC,  
crna sa belim nosačem  
*Cover frame 4M EXP BASIC,  
black with white holder*



142,4 x 91,8 mm

#### 70106.E0

Maska 6M EXP BASIC,  
crna sa belim nosačem  
*Cover frame 6M EXP BASIC,  
black with white holder*



187,2 x 91,8 mm

#### 70107.E0

Maska 7M EXP BASIC,  
crna sa belim nosačem  
*Cover frame 7M EXP BASIC,  
black with white holder*



209,6 x 91,8 mm

#### 70162.E0

Maska 3xM EXP BASIC, vertikalna,  
crna sa belim nosačem  
*Cover frame 3xM EXP BASIC, vertical,  
black with white holder*

Cover frame 3xM EXP BASIC, vertical, black with white holder

97,6 x 233,8 mm

#### 70142.E0

Maska 2xM EXP BASIC, vertikalna,  
crna sa belim nosačem  
*Cover frame 2xM EXP BASIC, vertical,  
black with white holder*

Cover frame 2xM EXP BASIC, vertical, black with white holder



97,6 x 162,8 mm

#### 70122.E0

Maska 2x2M EXP BASIC,  
horizontalna, crna sa belim nosačem  
*Cover frame 2x2M EXP BASIC,  
horizontal, black with white holder*



168,6 x 91,8 mm

#### 70132.E0


Maska 3x2M EXP BASIC,  
horizontalna, crna sa belim nosačem  
*Cover frame 3x2M EXP BASIC,  
horizontal, black with white holder*



239,6 x 91,8 mm

#### 70127.E0

Maska 2x7M EXP BASIC,  
crna sa belim nosačem  
*Cover frame 2x7M EXP BASIC,  
black with white holder*



209,6 x 162,8 mm



**experience**

## BASIC

### CRNA MASKA / SILVER NOSAČ BLACK FRAME / SILVER HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;

#### 70101.ES

Maska 1M EXP BASIC,  
crna sa silver nosačem  
*Cover frame 1M EXP BASIC,  
black with silver holder*



97,6 x 91,8 mm

#### 70102.ES

Maska 2M EXP BASIC,  
crna sa silver nosačem  
*Cover frame 2M EXP BASIC,  
black with silver holder*



97,6 x 91,8 mm

#### 70123.ES

Maska 2/3M EXP BASIC,  
crna sa silver nosačem  
*Cover frame 2/3M EXP BASIC,  
black with silver holder*



120 x 91,8 mm

#### 70103.ES

Maska 3M EXP BASIC,  
crna sa silver nosačem  
*Cover frame 3M EXP BASIC,  
black with silver holder*




120 x 91,8 mm

#### 70162.ES

Maska 3x2M EXP BASIC, vertikalna,  
crna sa silver nosačem  
*Cover frame 3x2M EXP BASIC, vertical,  
black with silver holder*

*Cover frame 3x2M EXP BASIC, vertical,  
black with silver holder*




97,6 x 233,8 mm

#### 70142.ES

Maska 2x2M EXP BASIC, vertikalna,  
crna sa silver nosačem  
*Cover frame 2x2M EXP BASIC, vertical,  
black with silver holder*

*Cover frame 2x2M EXP BASIC, vertical,  
black with silver holder*



97,6 x 162,8 mm

#### 70104.ES

Maska 4M EXP BASIC,  
crna sa silver nosačem  
*Cover frame 4M EXP BASIC,  
black with silver holder*



142,4 x 91,8 mm

#### 70122.ES

Maska 2x2M EXP BASIC,  
horizontalna, crna sa silver nosačem  
*Cover frame 2x2M EXP BASIC,  
horizontal, black with silver holder*



168,6 x 91,8 mm

#### 70132.ES

Maska 3x2M EXP BASIC,  
horizontalna, crna sa silver nosačem  
*Cover frame 3x2M EXP BASIC,  
horizontal, black with silver holder*



239,6 x 91,8 mm

#### 70106.ES


Maska 6M EXP BASIC,  
crna sa silver nosačem  
*Cover frame 6M EXP BASIC,  
black with silver holder*



187,2 x 91,8 mm

#### 70127.ES

Maska 2x7M EXP BASIC,  
crna sa silver nosačem  
*Cover frame 2x7M EXP BASIC,  
black with silver holder*



209,6 x 162,8 mm

#### 70107.ES

Maska 7M EXP BASIC,  
crna sa silver nosačem  
*Cover frame 7M EXP BASIC,  
black with silver holder*





209,6 x 91,8 mm

**experience**

**BASIC  
SILVER / SILVER**

Srebrna tekstura za moderne enterijere i kao modni dodatak na Vašem zidu

*Silver texture for modern interiors and as a fashion accessory to your wall*

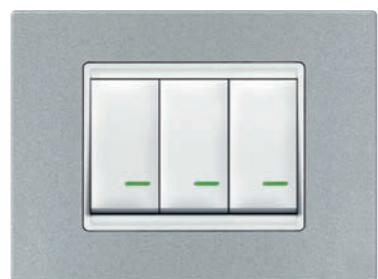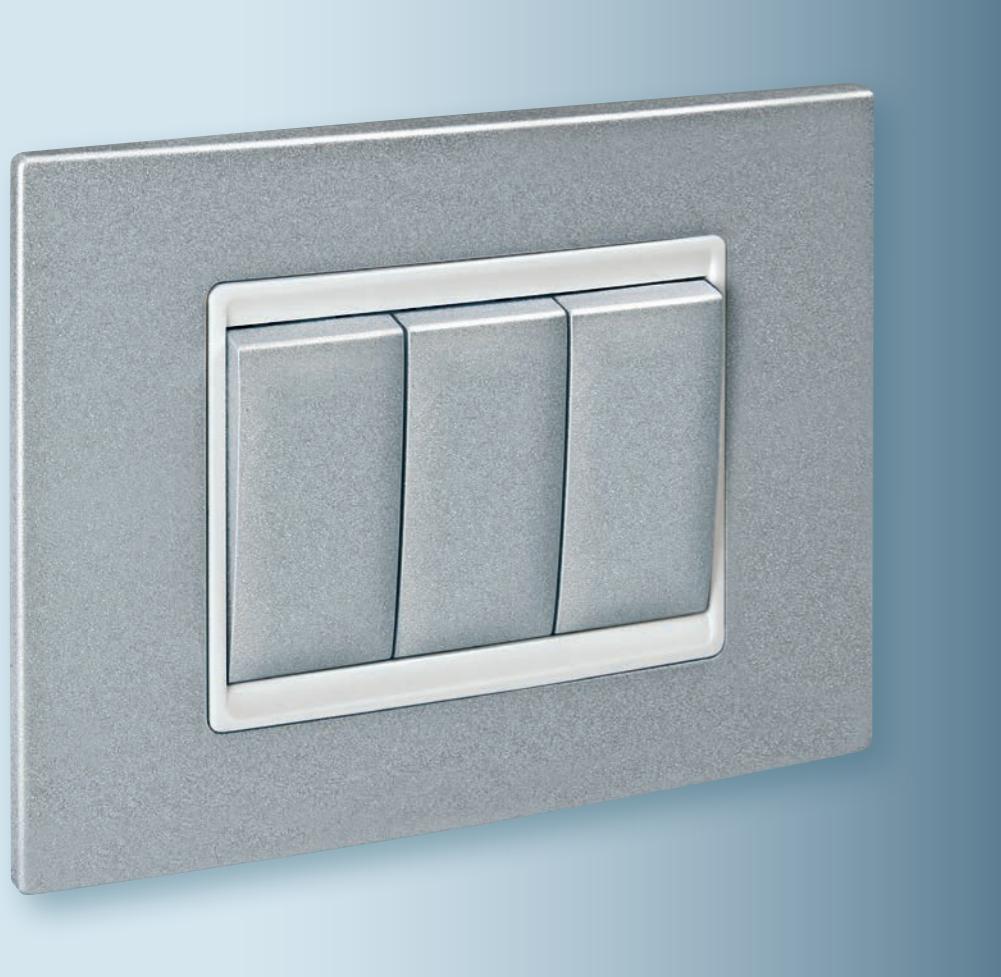



## BASIC

### SILVER MASKA / SILVER NOSAČ SILVER FRAME / SILVER HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;

#### 70101.SS

Maska 1M EXP BASIC,  
silver sa silver nosačem

*Cover frame 1M EXP BASIC,  
silver with silver holder*



97,6 x 91,8 mm

#### 70102.SS

Maska 2M EXP BASIC,  
silver sa silver nosačem

*Cover frame 2M EXP BASIC,  
silver with silver holder*



97,6 x 91,8 mm

#### 70123.SS

Maska 2/3M EXP BASIC,  
silver sa silver nosačem

*Cover frame 2/3M EXP BASIC,  
silver with silver holder*



120 x 91,8 mm

#### 70103.SS

Maska 3M EXP BASIC,  
silver sa silver nosačem

*Cover frame 3M EXP BASIC,  
silver with silver holder*



120 x 91,8 mm

#### 70104.SS

Maska 4M EXP BASIC,  
silver sa silver nosačem

*Cover frame 4M EXP BASIC,  
silver with silver holder*



142,4 x 91,8 mm

#### 70106.SS

Maska 6M EXP BASIC,  
silver sa silver nosačem

*Cover frame 6M EXP BASIC,  
silver with silver holder*



187,2 x 91,8 mm

#### 70107.SS

Maska 7M EXP BASIC,  
silver sa silver nosačem

*Cover frame 7M EXP BASIC,  
silver with silver holder*





209,6 x 91,8 mm

#### 70162.SS

Maska 3xM EXP BASIC, vertikalna,  
silver sa silver nosačem

*Cover frame 3xM EXP BASIC, vertical,  
silver with silver holder*




97,6 x 233,8 mm

#### 70142.SS

Maska 2xM EXP BASIC, vertikalna,  
silver sa silver nosačem

*Cover frame 2xM EXP BASIC, vertical,  
silver with silver holder*



97,6 x 162,8 mm

#### 70122.SS

Maska 2x2M EXP BASIC,  
horizontalna, silver sa silver nosačem

*Cover frame 2x2M EXP BASIC,  
horizontal, silver with silver holder*




168,6 x 91,8 mm

#### 70132.SS

Maska 3x2M EXP BASIC,  
horizontalna, silver sa silver nosačem

*Cover frame 3x2M EXP BASIC,  
horizontal, silver with silver holder*









239,6 x 91,8 mm

#### 70127.SS

Maska 2x7M EXP BASIC,  
silver sa silver nosačem

*Cover frame 2x7M EXP BASIC,  
silver with silver holder*





## BASIC

### SILVER MASKA / BELI NOSAČ SILVER FRAME / WHITE HOLDER

- Ugradnja na noseću pričubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;

#### 70101.S0

Maska 1M EXP BASIC,  
silver sa belim nosačem

*Cover frame 1M EXP BASIC,  
silver with white holder*



97,6 x 91,8 mm

#### 70102.S0

Maska 2M EXP BASIC,  
silver sa belim nosačem

*Cover frame 2M EXP BASIC,  
silver with white holder*



97,6 x 91,8 mm

#### 70123.S0

Maska 2/3M EXP BASIC,  
silver sa belim nosačem

*Cover frame 2/3M EXP BASIC,  
silver with white holder*



120 x 91,8 mm

#### 70103.S0

Maska 3M EXP BASIC,  
silver sa belim nosačem

*Cover frame 3M EXP BASIC,  
silver with white holder*



120 x 91,8 mm

#### 70104.S0

Maska 4M EXP BASIC,  
silver sa belim nosačem

*Cover frame 4M EXP BASIC,  
silver with white holder*



142,4 x 91,8 mm

#### 70106.S0

Maska 6M EXP BASIC,  
silver sa belim nosačem

*Cover frame 6M EXP BASIC,  
silver with white holder*



187,2 x 91,8 mm

#### 70107.S0

Maska 7M EXP BASIC,  
silver sa belim nosačem

*Cover frame 7M EXP BASIC,  
silver with white holder*





209,6 x 91,8 mm

#### 70162.S0

Maska 3xM EXP BASIC, vertikalna,  
silver sa belim nosačem

*Cover frame 3xM EXP BASIC, vertical,  
silver with white holder*




97,6 x 233,8 mm



#### 70142.S0

Maska 2xM EXP BASIC, vertikalna,  
silver sa belim nosačem

*Cover frame 2xM EXP BASIC, vertical,  
silver with white holder*




97,6 x 162,8 mm

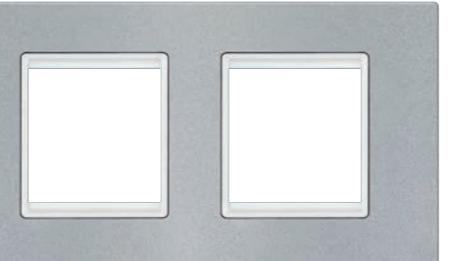



#### 70132.S0

Maska 3x2M EXP BASIC,  
horizontalna, silver sa belim nosačem

*Cover frame 3x2M EXP BASIC,  
horizontal, silver with white holder*



239,6 x 91,8 mm

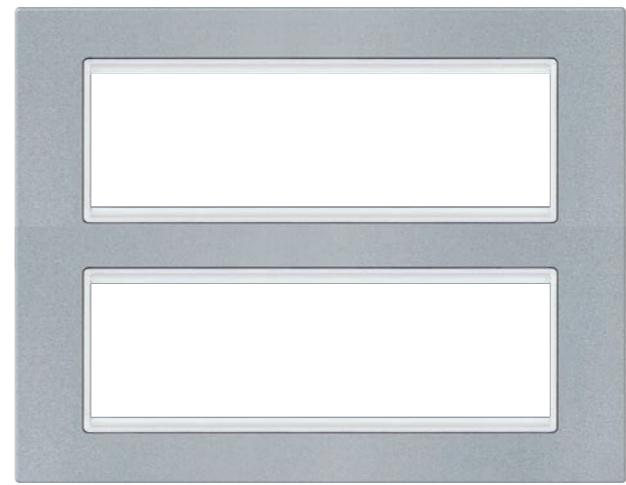

209,6 x 162,8 mm

#### 70127.S0

Maska 2x7M EXP BASIC,  
silver sa belim nosačem

*Cover frame 2x7M EXP BASIC,  
silver with white holder*





## BASIC

### SILVER MASKA / CRNI NOSAČ SILVER FRAME / BLACK HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- Installation onto the mounting frame by pressing
- For covering the assembly of modules;

#### 70101.SE

Maska 1M EXP BASIC,  
silver sa crnim nosačem

Cover frame 1M EXP BASIC,  
silver with black holder



97,6 x 91,8 mm

#### 70102.SE

Maska 2M EXP BASIC,  
silver sa crnim nosačem

Cover frame 2M EXP BASIC,  
silver with black holder



97,6 x 91,8 mm

#### 70123.SE

Maska 2/3M EXP BASIC,  
silver sa crnim nosačem

Cover frame 2/3M EXP BASIC,  
silver with black holder



120 x 91,8 mm

#### 70103.SE

Maska 3M EXP BASIC,  
silver sa crnim nosačem

Cover frame 3M EXP BASIC,  
silver with black holder



120 x 91,8 mm

#### 70104.SE

Maska 4M EXP BASIC,  
silver sa crnim nosačem

Cover frame 4M EXP BASIC,  
silver with black holder



142,4 x 91,8 mm

#### 70106.SE

Maska 6M EXP BASIC,  
silver sa crnim nosačem

Cover frame 6M EXP BASIC,  
silver with black holder



187,2 x 91,8 mm

#### 70107.SE

Maska 7M EXP BASIC,  
silver sa crnim nosačem

Cover frame 7M EXP BASIC,  
silver with black holder



209,6 x 91,8 mm

#### 70162.SO

Maska 3xM EXP BASIC,  
vertikalna, silver sa crnim nosačem

Cover frame 3xM EXP BASIC,  
vertical,  
silver with black holder














# experience

## COLOR VIVID

Razigrani kolorit u jasnim formama pruža veliki broj kombinacija boja

Playfull coloring in clear forms provides a variety of combinations of design

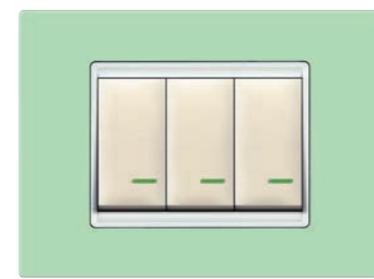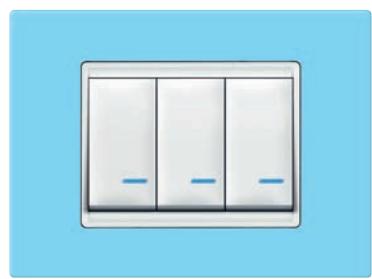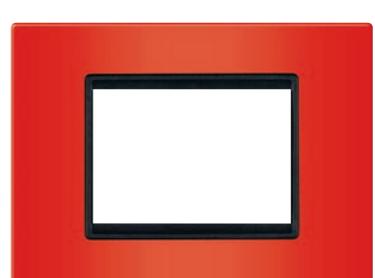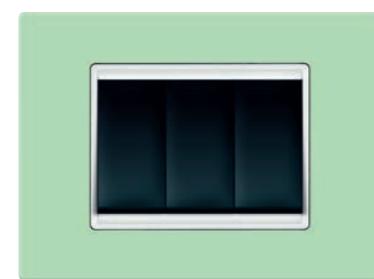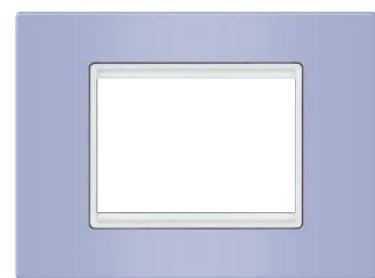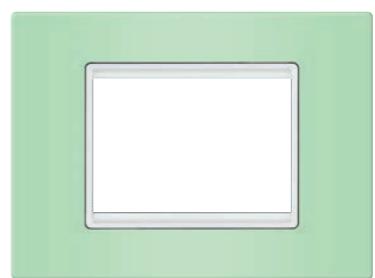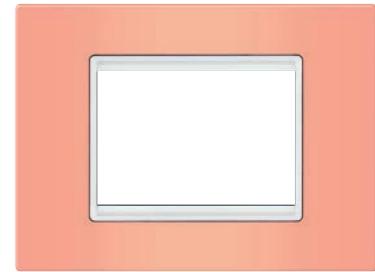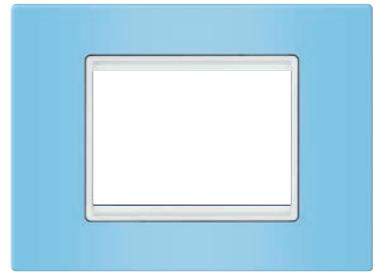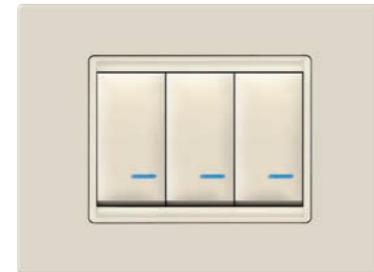


**x = 99**

Krem/Krem  
Beige/Beige

**x = 4**

Crvena  
Red

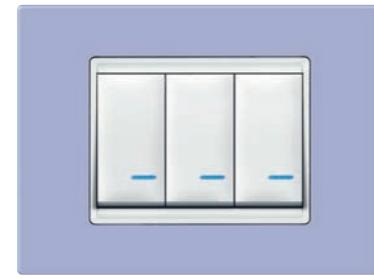

**1M**  
70201.x



**2M**  
70202.x



**2/3M**  
70223.x



**3M**  
70203.x



**2x2M**  
70242.x



**3x2M**  
70262.x



**2x2M**  
70222.x



**3x2M**  
70232.x



**2x7M**  
70227.x

**4M**  
70204.x

**6M**  
70206.x

**7M**  
70207.x












experience

## COLOR METALLIC

Metalik efekat daje vašem zidu  
dozu luksusa

Metallic effect gives your wall  
a dose of luxury

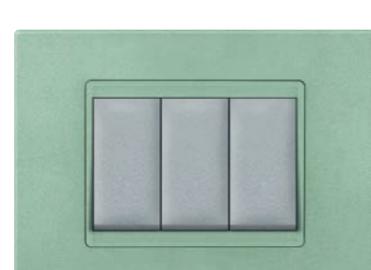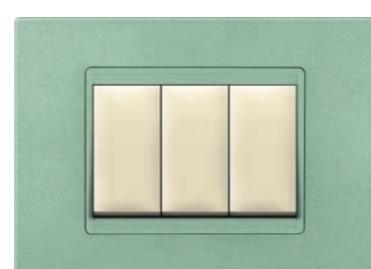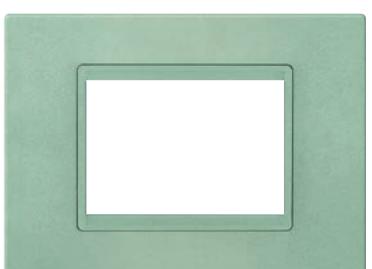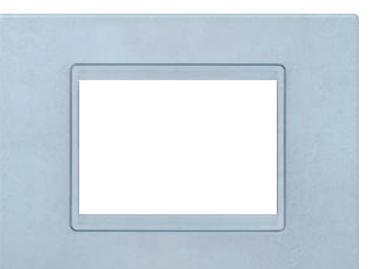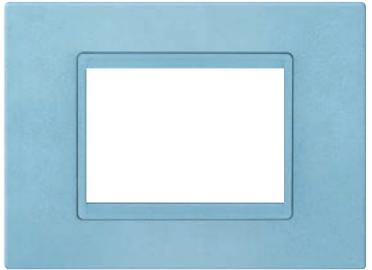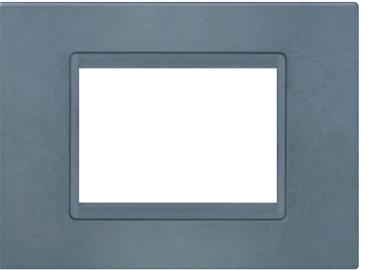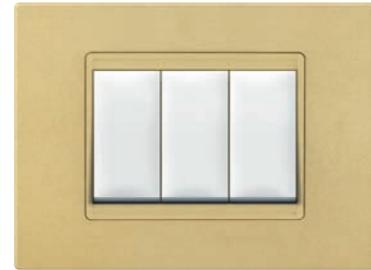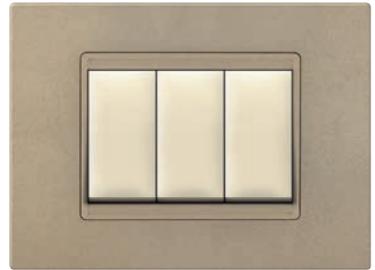

**x = G**

Zlatna sjaj  
Shiny gold

**x = U**

Aluminijum  
Aluminum

**x = Z**

Zelena metalik  
Green metallic



**x = G**

Zlatna  
Gold

**x = B1**

Tobacco braon  
Tobacco brown

NOVO  
NEW

**1M**

70301.x

**2M**

70302.x

**2/3M**

70323.x

**3M**

70303.x

**4M**

70304.x

**6M**

70306.x

**7M**

70307.x

**2x2M**

70342.x

**3x2M**

70362.x

**2x2M**

70322.x

**3x2M**

70332.x

**2x7M**

70327.x







# experience

## COLOR SOFT TOUCH


Kada se svetlo ugasi soft touch sky blue uvodi vas u novi svet dekorativnih maski

*When the light is off, sky blue soft touch brings you into the new world of decorative frames*

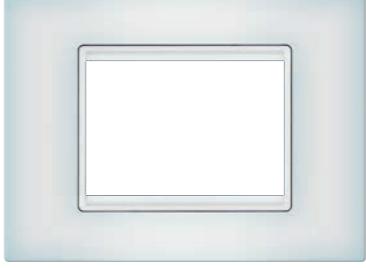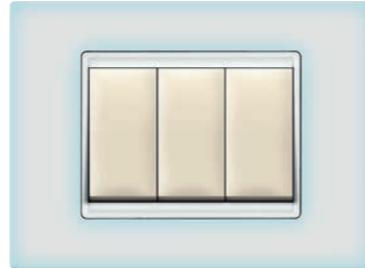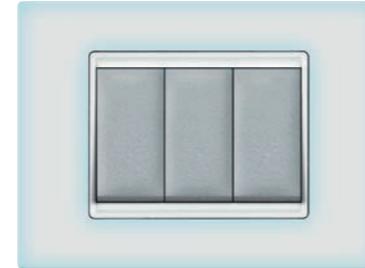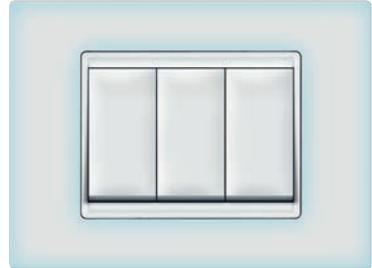

**x = K1**

Sky blue  
*Sky blue*

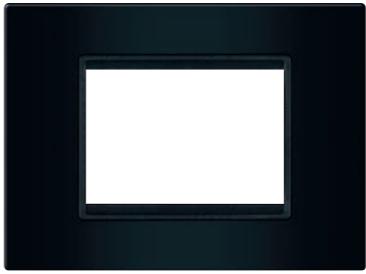

**x = E1**

Crna soft  
*Soft black*

## LEPOTA SKRIVENA U DODIRU

## BEAUTY HIDDEN IN TOUCH

Nova linija maski programa Experience budi u korisniku još jedno čulo: čulo dodira.

Mekana, nežna površina - specifičnost koja naglašava sofisticirani izgled.

Maske soft touch proizvode se u dve osnovne boje: crnoj i beloj (sky blue).


Novina se ogleda u beloj masci koja samo u mraku svetli plavičastim svetlom, pa otuda i naziv sky blue.

*New line of frames arouses in user a new feeling: a sense of touch.*

*Soft, tender surface - a distinctive feature that highlights a sophisticated look.*

*Soft touch frames are produced in two basic colors: black and white (sky blue).*

*Originality is reflected in the white frame that glows in the dark by bluish light, hence the name is sky blue.*

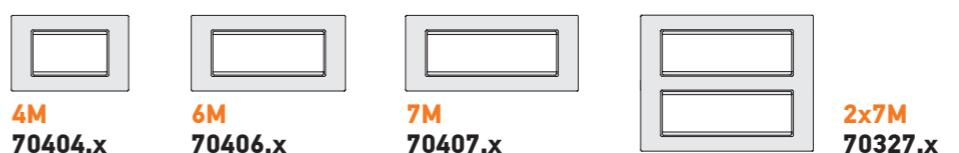



# experience

## EXCLUSIVE WOOD

Četiri elegantne vrste za tradicionalne prostore i korisnike koji uživaju u toplini punog drveta

*Four elegant woods  
for traditional spaces and users  
that enjoys the warmth of solid wood*


**x = J**

Javor  
Maple



**x = Y**

Trešnja  
Cherry

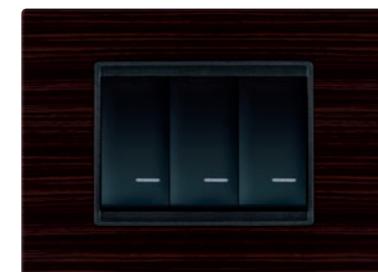

**x = W**

Wenge  
Wenge



**x = R**

Orah  
Nut

### DOZA RUSTIČNOSTI U VAŠEM DOMU

Dekorativne maske od punog drveta daju prostoru zemljani, prirodan izgled.

Ono što ih čini jedinstvenim su karakteristike i šare samog drveta od kojeg su izradene.

### A DOSE OF RUSTICITY AT YOUR HOME

Decorative cover masks made of solid wood are bringing the living area earthy, natural look.

What make them unique are characteristics and patterns of the wood they are made of.



**2M**  
**70502.x**



**3M**  
**70503.x**



**4M**  
**70504.x**



**7M**  
**70507.x**






**experience**

## EXCLUSIVE GLASS

Osvojiće svaki prostor koji prati najnovije trendove u dizajnu enterijera

Fulfill every space  
that follows the latest trends  
in interior design


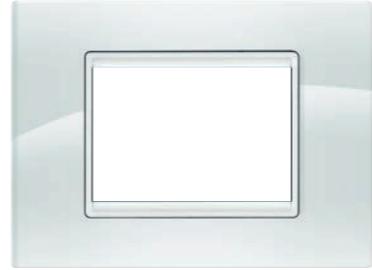
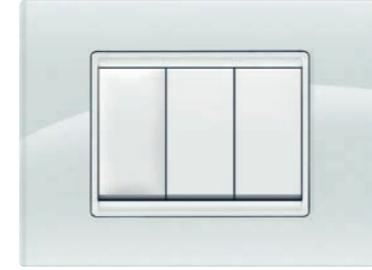
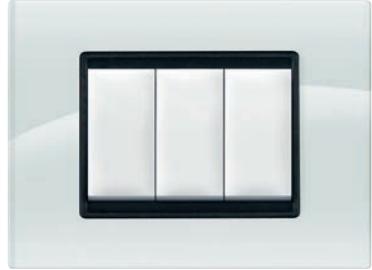


**x = 00**




Kristal  
bela  
sa belim  
nosačem  
*Chystal  
white  
with  
white  
holder*



**x = 0**  
Kristal bela  
*Chystal white*

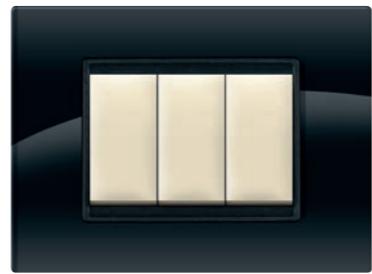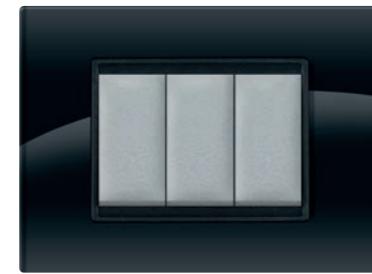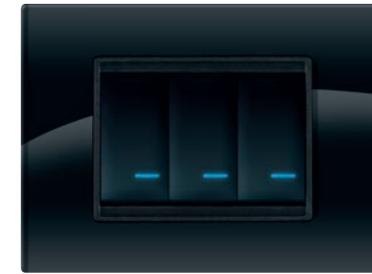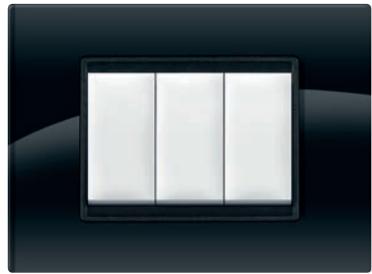

**x = E**  
Kristal crna  
*Crystal black*

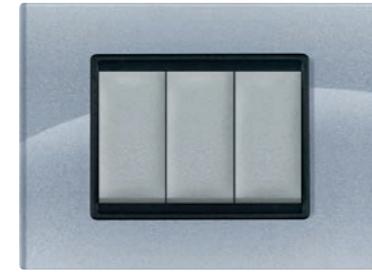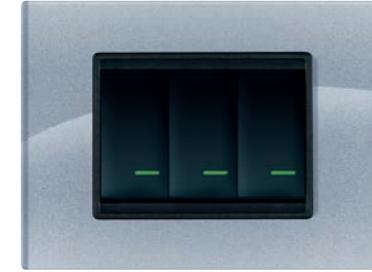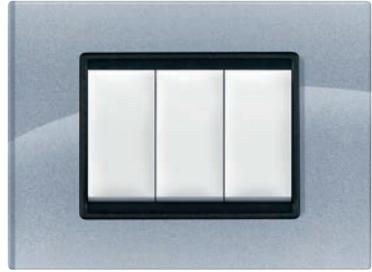

**x = S**  
Ice silver  
*Ice silver*



**x = 7**  
Koral  
*Coral*

ČISTO I  
SENZUALNO...  
EKSTRAVAGANTNO  
I SJAJNO...

PURE AND  
SENSUAL...  
EXTRAVAGANT  
AND SHINY...

Staklo je jedan od osnovnih materijala u našim životnim prostorima već nekoliko vekova i sve do današnjih dana sve više pronađi svoje mesto u dizajnu enterijera.

Glass is one of the basic materials in our living spaces for several centuries and until today more and more finds its place in interior design.




**2M**  
70602.x



**3M**  
70603.x



**4M**  
70604.x



**7M**  
70607.x



**experience**







## EXCLUSIVE METAL

Moć livenog metala pretočena  
u eleganciju za jedinstvene prostore

*Distinctive materials  
for unique spaces*

**x = Q**

Titanijum  
*Titanium*

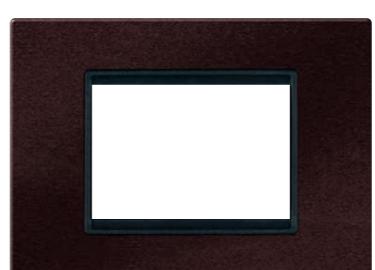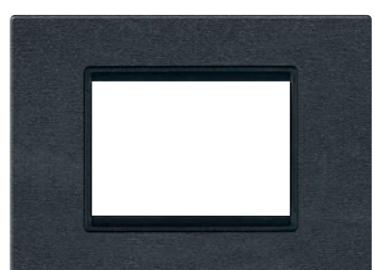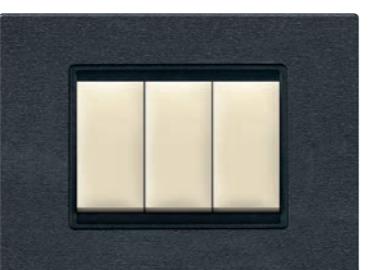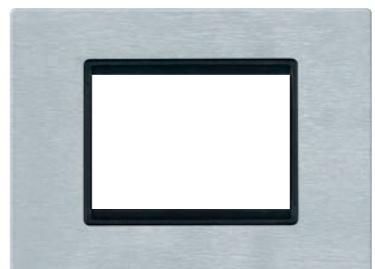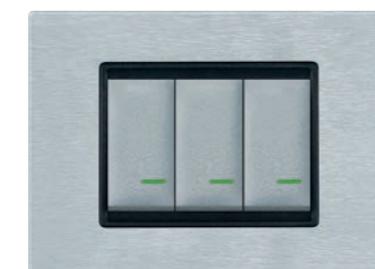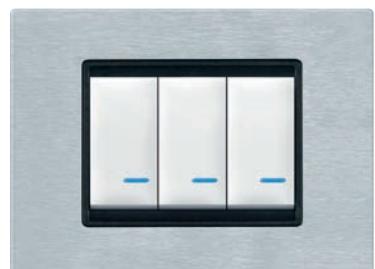

**IZVANREDAN...  
JASAN... TRAJAN...  
PLEMENIT... METAL**

**OUTSTANDING...  
CLEAR... DURABLE...  
NOBLE... METAL**

Exclusive linija programa Experience obogaćena je još jednim prirodnim materijalom – metalom.

Metal kao materijal budi u korisniku osećaj trajnosti i robustnosti.

Metal kao detalj na zidu oslikava karakter vlasnika i zasigurno budi pažnju posmatrača.

U kombinaciji sa jasnim geometrijskim linijama i grubim površinama dekorativne maske od metala lako su uklopite u rustične, ali i u ultra moderne domove.

*Exclusive line in Experience is enriched with another natural material - metal.*

*Metal as a material arouse in user a sense of durability and robustness.*

*Metal as a detail on the wall reflects the character of owners and certainly awakes the attention of viewer.*

*In combination with clear geometric lines and rough surfaces metal covering masks are easy fitting in rustic and in ultra modern homes.*




**2M  
70702.x**



**3M  
70703.x**



**4M  
70704.x**





**7M  
70707.x**




**experience**

## UGRADNJA INSTALLATION

- • Montažne kutije Ø60  
• Installation boxes Ø60
- • Montažne kutije za modularni program  
• Installation boxes for modular program

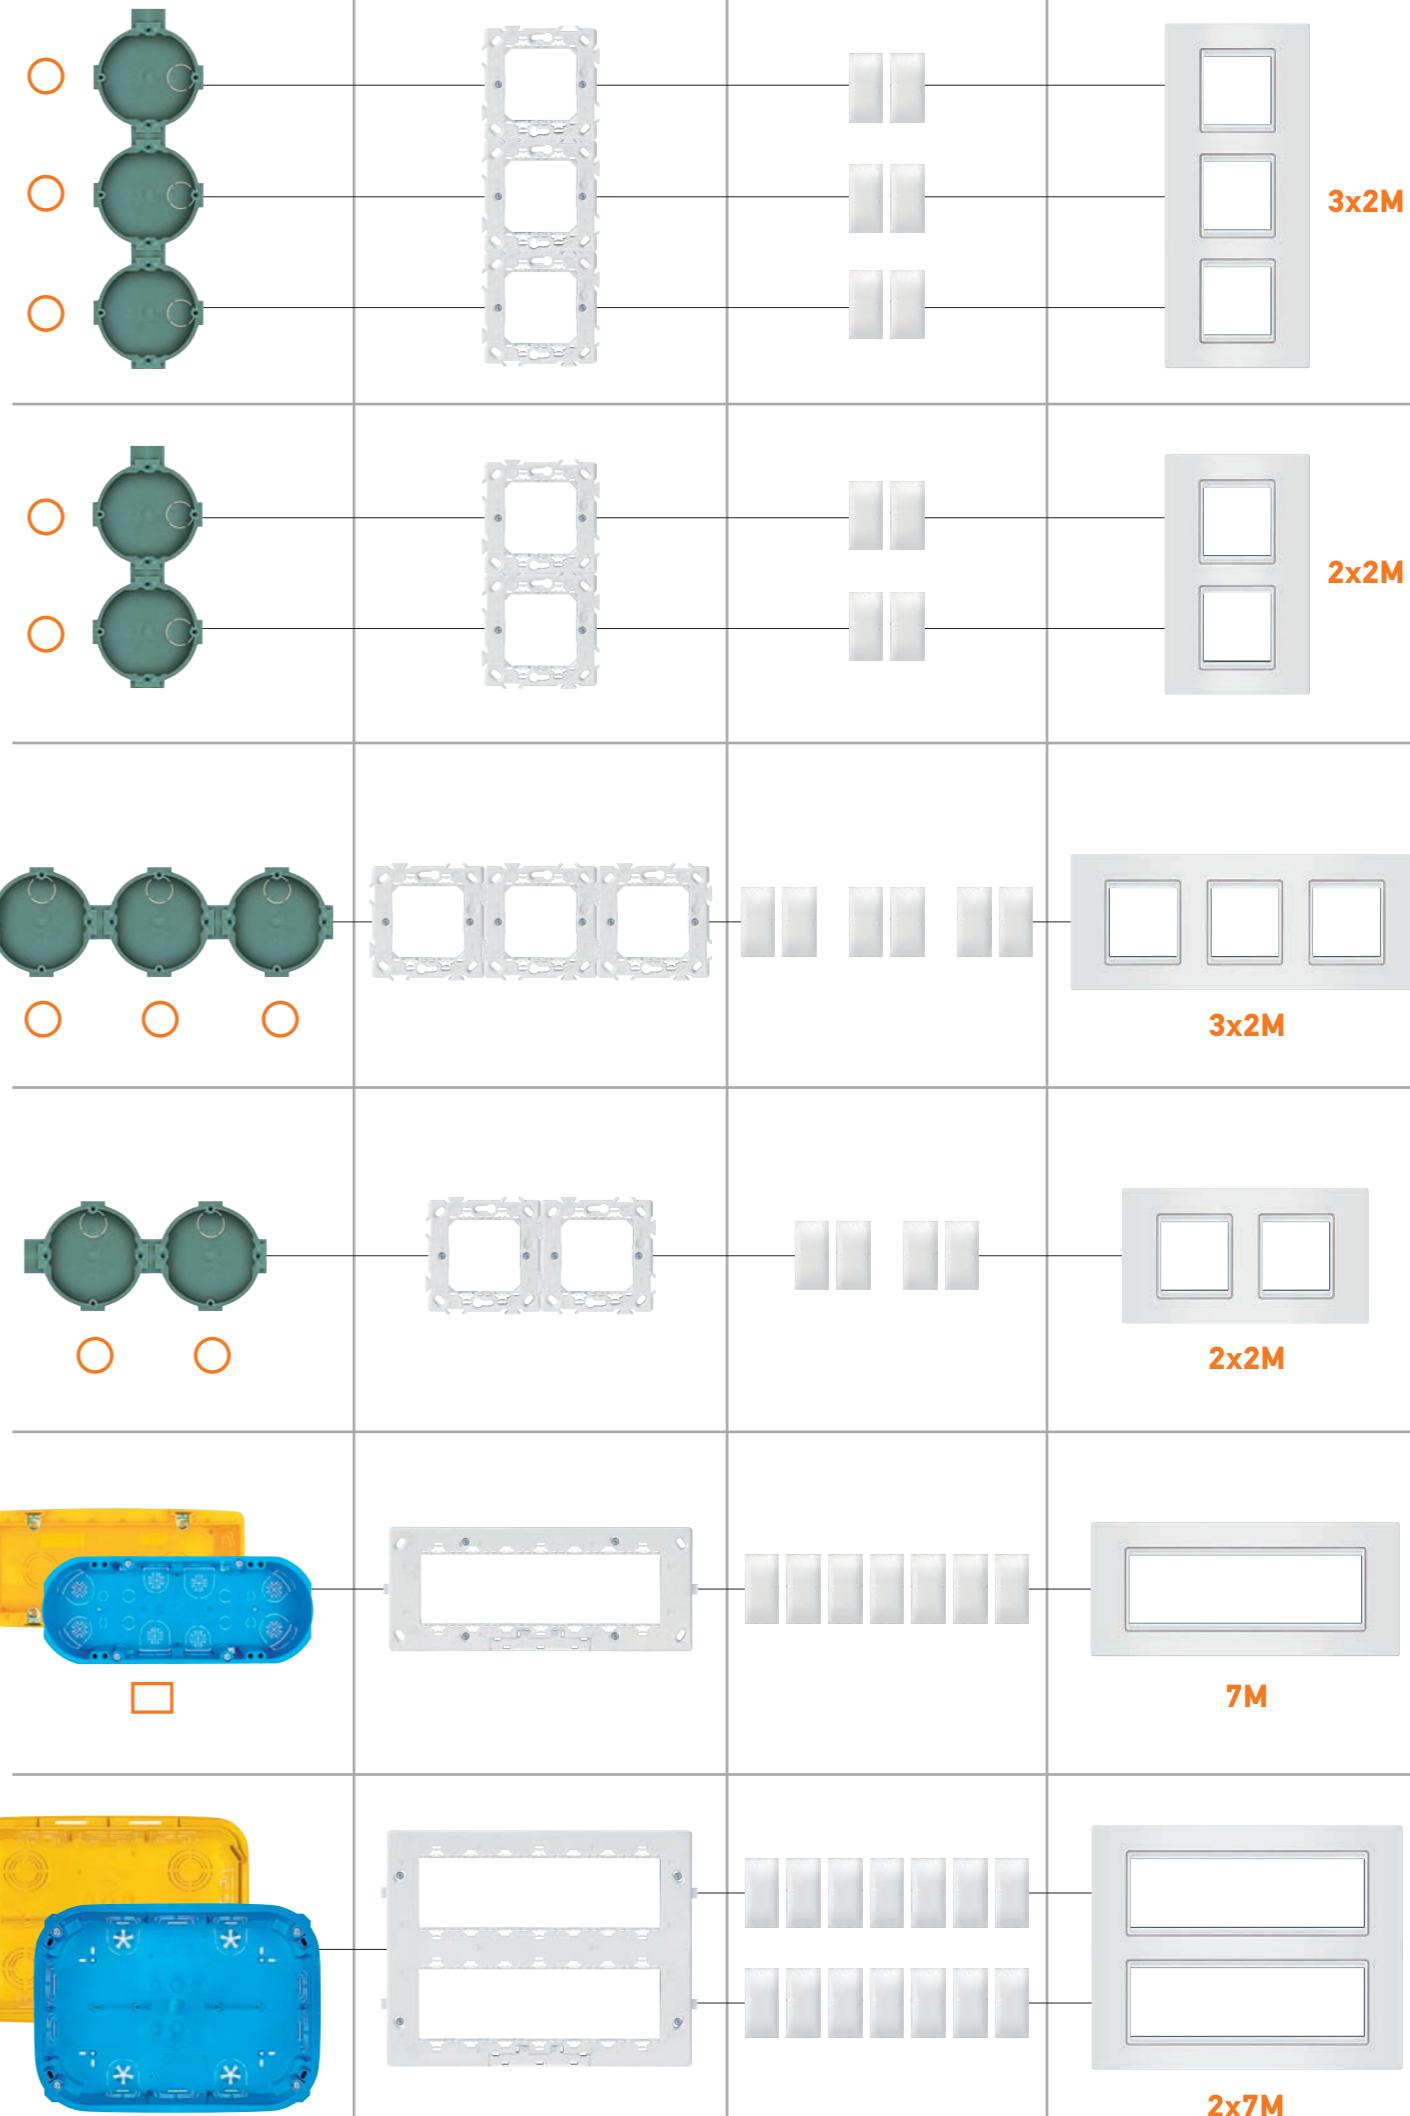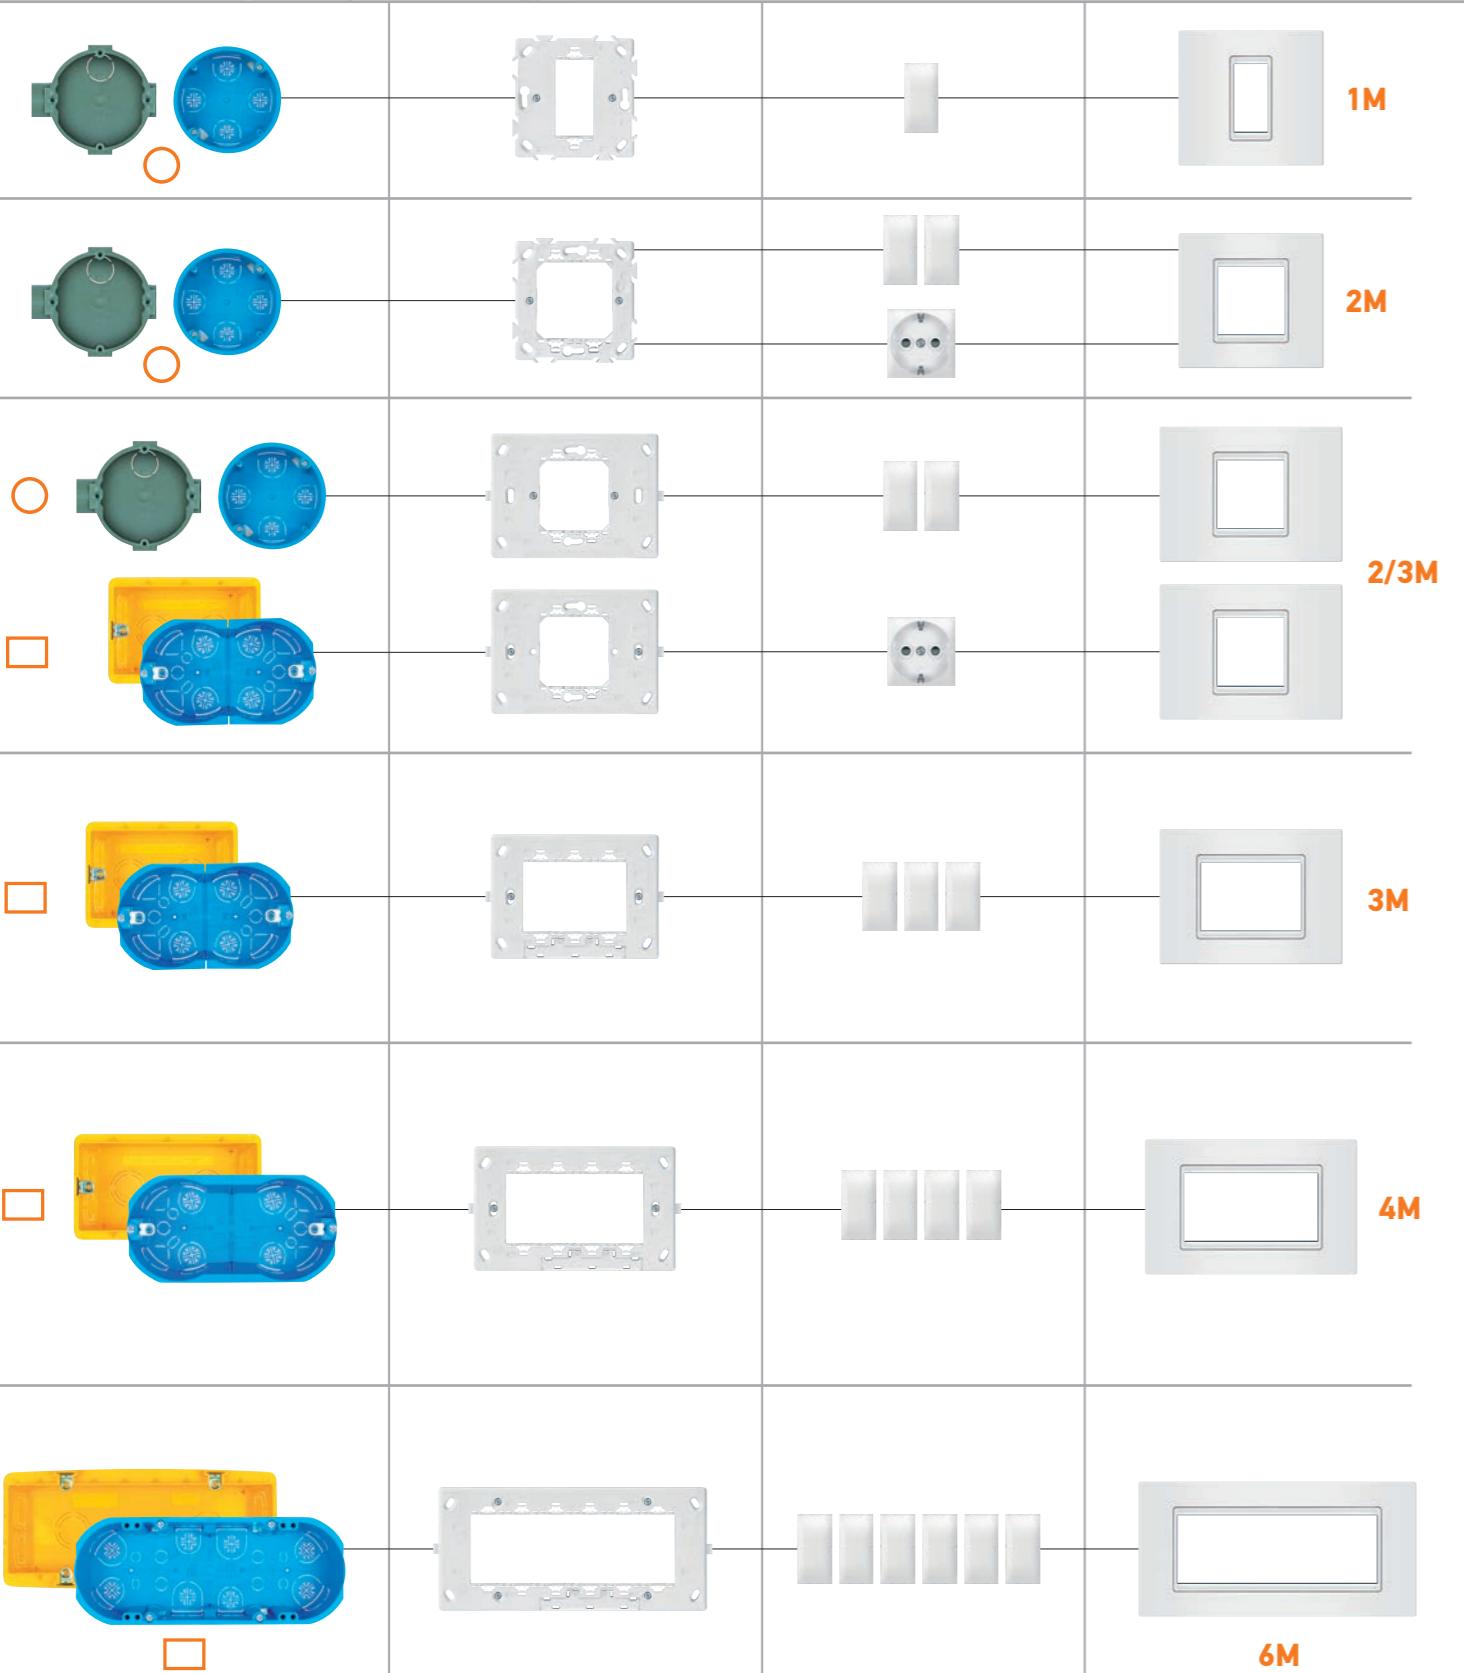

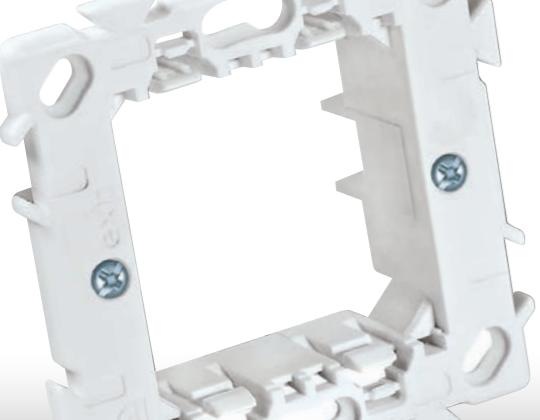

**experience**

## PRIRUBNICE MOUNTING FRAMES



**71001**

Prirubnica  
1M EXP  
za šuplji zid

Mounting  
frame 1M EXP  
for hollow wall



- Za ugradnju jednog modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka

- For one module installation;
- Installation into the mounting box Ø60 by screws



**71101**


Prirubnica  
1M EXP  
sa stegačima

Mounting  
frame 1M EXP  
with claws



- Za ugradnju jednog modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača

- For one module installation;
- Installation into the mounting box Ø60 by clamps



**71002**

Prirubnica  
2M EXP  
za šuplji zid

Mounting  
frame 2M EXP  
for hollow wall



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka

- For two module installation;
- Installation into the mounting box Ø60 by screws



**71102**


Prirubnica  
2M EXP  
sa stegačima

Mounting  
frame 2M EXP  
with claws



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača

- For two module installation;
- Installation into the mounting box Ø60 by clamps



**71022**


Prirubnica sa metalnim  
umetkom 2M EXP  
za šuplji zid

Mounting frame with  
metal insert 2M EXP  
for hollow wall



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka

- For two module installation;
- Installation into the mounting box Ø60 by screws



**71122**


Prirubnica sa metalnim  
umetkom 2M EXP  
sa stegačima

Mounting frame with  
metal insert 2M EXP  
with claws



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača

- For two module installation;
- Installation into the mounting box Ø60 by clamps

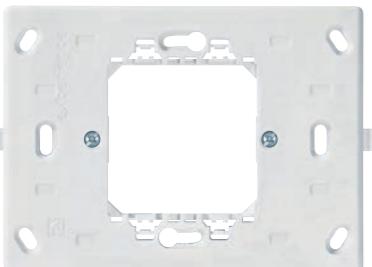

**71023**


Prirubnica  
2/3M EXP  
sa vijcima

Mounting  
frame 2/3M EXP  
with screws



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju 3M pomoću vijaka

- For two module installation;
- Installation into the mounting box 3M by screws

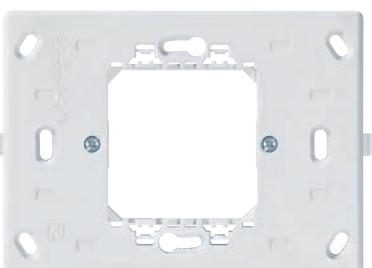

**71123**


Prirubnica  
2/3M EXP  
sa stegačima

Mounting  
frame 2/3M EXP  
with claws



- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača

- For two module installation;
- Installation into the mounting box Ø60 by clamps

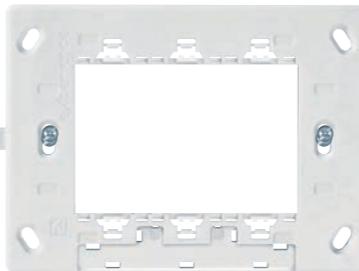

**71003**

Prirubnica  
3M EXP  
sa vijcima

Mounting  
frame 3M EXP  
with screws



- Za ugradnju tri modula;
- Ugradnja u montažnu kutiju 3M pomoću vijaka

- For three module installation;
- Installation into the mounting box by screws



**71004**

Prirubnica  
4M EXP  
sa vijcima

Mounting  
frame 4M EXP  
with screws



- Za ugradnju četiri modula;
- Ugradnja u montažnu kutiju 4M pomoću vijaka

- For four module installation;
- Installation into the mounting box by screws



**71006**

Prirubnica  
6M EXP  
sa vijcima

Mounting  
frame 6M EXP  
with screws



- Za ugradnju šest modula;
- Ugradnja u montažnu kutiju 7M pomoću vijaka

- For six module installation;
- Installation into the mounting box by screws



**71007**


Prirubnica  
7M EXP  
sa vijcima

Mounting  
frame 7M EXP  
with screws



- Za ugradnju sedam modula;
- Ugradnja u montažnu kutiju 7M pomoću vijaka

- For seven module installation;
- Installation into the mounting box by screws

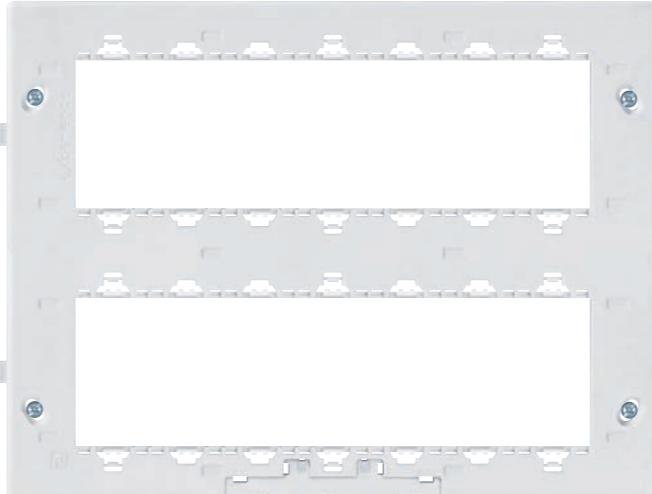

**71027**

Prirubnica  
2x7M EXP  
sa vijcima

Mounting  
frame 2x7M EXP  
with screws




- Za ugradnju 2 sedam modula;
- Ugradnja u montažnu kutiju 2x7M pomoću vijaka

- For 2x seven module installation;
- Installation into the mounting box by screws

**experience**


## PRIRUBNICE SA LED OSVETLJENJEM MOUNTING FRAMES WITH LED LIGHTNING

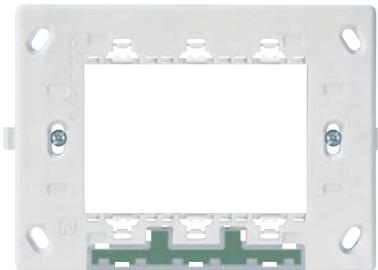

**71303.5**

Prirubnica  
3M EXP sa vijcima  
i LED osvetljenjem  
plavo svetlo,  
  
Mounting  
frame 3M EXP  
with screws  
and LED lightning,  
blue light


- Za ugradnju tri modula;
- Ugradnja u montažnu  
kutiju pomoću vijaka
- For three module  
installation;
- Installation into the  
mounting box  
by screws

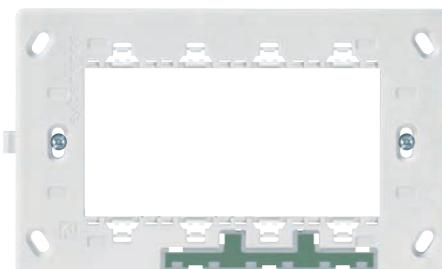

**71304.5**

Prirubnica  
4M EXP sa vijcima  
i LED osvetljenjem  
plavo svetlo,  
  
Mounting  
frame 4M EXP  
with screws  
and LED lightning,  
blue light

- Za ugradnju četiri modula;
- Ugradnja u montažnu  
kutiju pomoću vijaka
- For four module  
installation;
- Installation into the  
mounting box  
by screws

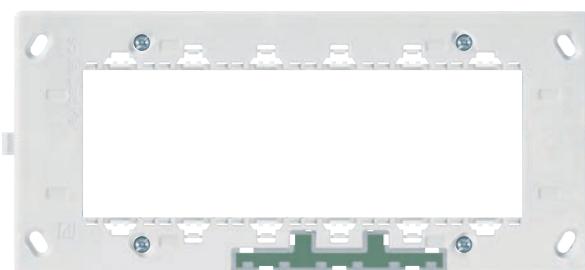

**71306.5**

Prirubnica  
6M EXP sa vijcima  
i LED osvetljenjem  
plavo svetlo,  
  
Mounting  
frame 6M EXP  
with screws  
and LED lightning,  
blue light

- Za ugradnju šest modula;
- Ugradnja u montažnu  
kutiju pomoću vijaka
- For six module  
installation;
- Installation into the  
mounting box  
by screws



**71307.5**

Prirubnica  
7M EXP sa vijcima  
i LED osvetljenjem  
plavo svetlo,  
  
Mounting  
frame 7M EXP  
with screws  
and LED lightning,  
blue light

- Za ugradnju sedam modula;
- Ugradnja u montažnu  
kutiju pomoću vijaka
- For seven module  
installation;
- Installation into the  
mounting box  
by screws



**71202**

Set vijaka M3,5 x 20  
pakovanje 100 kom  
Screw set M3,5 x 20  
pack. 100 pcs.



**71203**

Set vijaka M3,5 x 35  
pakovanje 50 kom  
Screw set M3,5 x  
35 pack. 50 pcs.




**71205**

Set vijaka M3,5 x 50  
pakovanje 50 kom  
Screw set M3,5 x  
50 pack. 50 pcs.

**experience**

## MONTAŽNI PRIBOR INSTALLATION ACCESSORIES

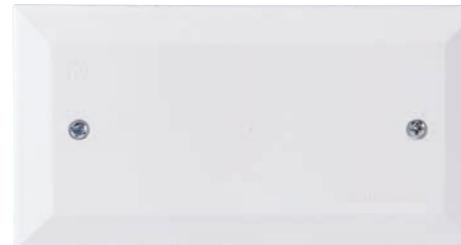

**65232.0**

Poklopac za  
kutiju 3M, beli  
  
Ornamental cover  
for 3M, white

- Montažna kutije za 3, 4 i 7 modula poseduje  
i posebne ukrasne poklopce koji se na kutiju  
pričvršćuju viljcima. Poklopci imaju višestruku  
namenu i obezbeđuju sledeće:  
  - Mogućnost korišćenja montažnih kutija,  
kao razvodnih instalacionih kutija.
  - Mogućnost da se izvede dodatna instalacija  
koja će se naknadno povezati i koristiti.
  - Mogućnost upotrebe montažnih kutija kao  
kutija za izjednačenje potencijala uz primenu  
odgovarajućih rednih stezaljki.

\* Halogen free

**65242.0**

Poklopac za  
kutiju 4M, beli  
  
Ornamental cover  
for 4M, white

- Poklopac za zatvaranje  
montažne kutije kada se  
koristi kao razvodna ili za  
izjednačenje potencijala;  
- Ugradnja na montažnu  
kutiju vijcima

**65272.0**

Poklopac za  
kutiju 7M, beli  
  
Ornamental cover  
for 7M, white

- Poklopac za  
kutiju 2x7M, beli  
  
Ornamental cover  
for 2x7M, white

**65277.0**

Poklopac za  
kutiju 2x7M, beli  
  
Ornamental cover  
for 2x7M, white



**65231.0**

Zaštitni poklopac  
za kutiju PM3  
  
Protecting  
cover for PM3  
installation box

- Poklopac za zaštitu kutije  
i provodnika prilikom  
materisanja;
- Snabdevan signalnim pipcima  
radi lakšeg pronađenja  
nakon materisanja;
- Ugradnja na montažnu  
kutiju utiskivanjem

**65241.0**


Zaštitni poklopac  
za kutiju PM4  
  
Protecting  
cover for PM4  
installation box

- Protective cover for mounting  
box and conducting wires  
during plastering;
- With signal extensions  
for easier finding  
after plastering;
- Installation onto the mounting  
box by pressing

**65271.0**

Zaštitni poklopac  
za kutiju PM7  
  
Protecting  
cover for PM7  
installation box

- Protective cover for mounting  
box and conducting wires  
during plastering;
- Snabdevan signalnim pipcima  
radi lakšeg pronađenja  
nakon materisanja;
- Ugradnja na montažnu  
kutiju utiskivanjem

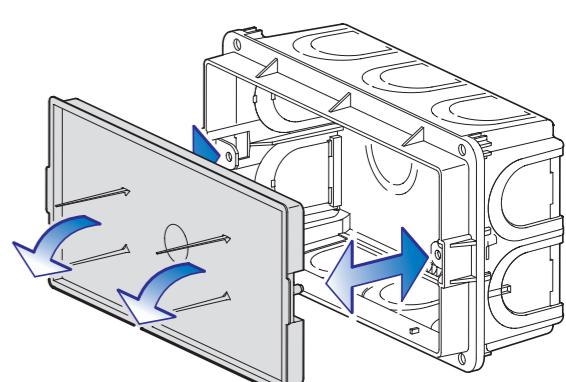

- Kod ugradnje montažnih kutija u pune zidove  
unutrašnjost kutije se zaštićuje zaštitnim  
poklopcom koji prilikom materisanja zidova  
obezbeđuje nesmetani rad.

- Nakon sušenja maltera poklopac se  
jednostavno izvadi zajedno sa delom  
maltera koji je preko njega.
- Unutrašnjost kutije i provodnici ostaju čisti.

- When installing, the installation boxes into the  
solid walls, the internal parts of the box are to be  
protected by the protecting cover which provides  
the trouble-free wall plastering.
- After drying, the cover can be simply taken out  
together with a part of plaster over it.
- The internal part of the box and  
the conducting wires remain clean.

\* Halogen free

## NADGRADNE KUTIJE ZA NA ZID WALL MOUNTED BOXES



Bela  
White **x = 0**

Siva  
Grey **x = 1**



**71402.x**

Kutija nadgradna  
2M za na zid

Wall mounted  
box 2M

- Za ugradnju dva modula;
- Ugradnja na zid pomoću vijaka

- For two module installation;
- Wall mounting with screws



**71404.x**

Kutija nadgradna  
4M za na zid

Wall mounted  
box 4M

- Za ugradnju četiri modula;
- Ugradnja na zid pomoću vijaka

- For four module installation;
- Wall mounting with screws



**71407.x**

Kutija nadgradna  
7M za na zid

Wall mounted  
box 7M

- Za ugradnju sedam modula;
- Ugradnja na zid pomoću vijaka

- For seven module installation;
- Wall mounting with screws



**71414.x**

Kutija nadgradna  
ugaona 4M

Wall mounted  
angle box 4M

- Kutija za ugradnju četvorostruke prirubnice;
- Ugradnja na zid pomoću vijaka

- Mounting box for four gang mounting frame;
- Wall mounting with screws



**71417.x**

Kutija nadgradna  
ugaona 7M

Wall mounted  
angle box 7M

- Kutija za ugradnju sedmorostruke prirubnice;
- Ugradnja na zid pomoću vijaka

- Mounting box for seven gang mounting frame;
- Wall mounting with screws

Bela  
White **x = 0**

Siva  
Grey **x = 1**

**KUĆISTA IP55**  
za ugradnju modula  
iz programa EXPERIENCE.

- Poseduju zaštitu od:
  - taloženja prašine,
  - potpunu zaštitu od dodira,
  - zaštitu od prskanja vode  
u svim smerovima.
- Enclosure has protection:
  - against dust,
  - complete touch protection
  - protection against spraying water in all directions

Bela  
White **x = 0**

Siva  
Grey **x = 1**

## KUĆISTA IP55 ENCLOSURES IP55



**71432.x**

Kućište modula  
EXP za u zid **IP55**  
sa vijcima 2M

Enclosure for  
modules EXP for  
into the wall **IP55**  
with screws 2M

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja u zid  
u montažnu kutiju Ø60

- Protection degree IP55
- Complied with IEC 60670-1
- Mounting into the wall  
in mounting box Ø60



**71442.x**

Kućište modula  
EXP za u zid **IP55**  
sa stegačima 2M

Enclosure for  
modules EXP for  
into the wall **IP55**  
with claws 2M

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja u zid  
u montažnu kutiju Ø60

- Protection degree IP55
- Complied with IEC 60670-1
- Mounting into the wall  
in mounting box Ø60



**71422.x**

Kućište modula  
EXP za na zid  
**IP55** 2M

Enclosure for  
modules EXP  
for onto the wall  
**IP55** 2M

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja na zid pomoću  
vijaka prečnika do 4mm

- Protection degree IP55
- Complied with IEC 60670-1
- Wall mounting by screws  
dia.up to 4mm



**71434.x**

Kućište modula  
EXP za u zid **IP55**  
sa vijcima 4M

Enclosure for  
modules EXP for  
into the wall **IP55**  
with screws 4M

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja u zid u modularnu  
montažnu kutiju (4M)

- Protection degree IP55
- Complied with IEC 60670-1
- Mounting into the wall  
in modular mounting box (4M)



**71424.x**

Kućište modula  
EXP za na zid  
**IP55** 4M

Enclosure for  
modules EXP  
for onto the wall  
**IP55** 4M

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja na zid pomoću  
vijaka prečnika do 4mm

- Protection degree IP55
- Complied with IEC 60670-1
- Wall mounting by screws  
dia.up to 4mm

**experience**

## MONTAŽNE KUTIJE ZA PUNI ZID INSTALLATION BOXES FOR SOLID WALL



**700**

Montažna kutija  
Ø60 x 40 mm  
nizajuća za rastojanje  
71mm  
*Installation box  
Ø60 x 40 mm  
for sequencing  
71mm step*

**710**

Montažna kutija  
Ø60 x 60mm  
nizajuća za rastojanje  
71mm  
*Installation box  
Ø60 x 60 mm  
for sequencing  
71mm step*

**800**

Montažna kutija  
Ø60 x 40mm  
nizajuća za rastojanje  
80mm  
*Installation box  
Ø60 x 40 mm  
for sequencing  
80mm step*

\* Halogen free

\* Halogen free



**6523**

Montažna kutija 3M  
za puni zid,  
50 mm  
*Installation box 3M  
for solid wall,  
50 mm*

**65236**

Montažna kutija 3M  
za puni zid,  
65 mm  
*Installation box 3M  
for solid wall,  
65 mm*

• Kutija za ugradnju  
trostrukе prirubnice;  
• Ugradnja u puni zid  
pod malter

• Mounting box for three  
gang mounting frame;  
• Installation into  
the solid wall

650°C, 400V~



**6524**

Montažna kutija 4M  
za puni zid, 50 mm  
*Installation box 4M  
for solid wall,  
50 mm*

**65246**

Montažna kutija 4M  
za puni zid, 65 mm  
*Installation box 4M  
for solid wall,  
65 mm*

• Kutija za ugradnju  
četvorostruke prirubnice;  
• Ugradnja u puni zid  
pod malter

• Mounting box for four  
gang mounting frame;  
• Installation into  
the solid wall

650°C, 400V~



**6527**

Montažna kutija 6M/7M  
za puni zid,  
50 mm  
*Installation box  
6M/7M for solid wall,  
50 mm*


**65276**

Montažna kutija 6M/7M  
za puni zid,  
65 mm  
*Installation box  
6M/7M for solid wall,  
65 mm*

• Kutija za ugradnju  
sedmorostruke prirubnice;  
• Ugradnja u puni zid  
pod malter

• Mounting box for seven  
gang mounting frame;  
• Installation into  
the solid wall

650°C, 400V~

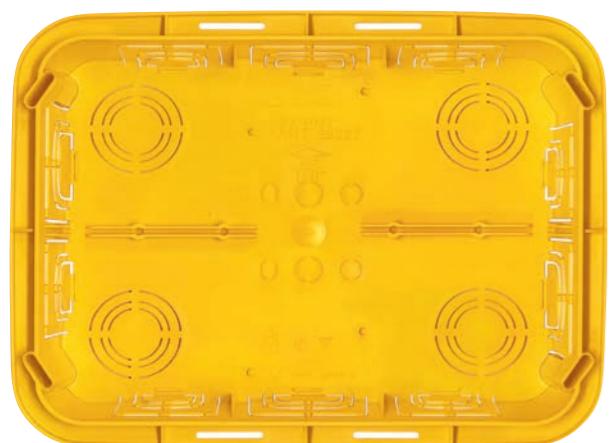

**65227**

Montažna kutija 2 x 7M  
za puni zid,  
50 mm  
*Installation box  
2 x 7M for solid wall,  
50 mm*

• Kutija za ugradnju  
2 x sedmorostruke  
prirubnice;  
• Ugradnja u puni zid  
pod malter

• Mounting box for 2 x seven  
gang mounting frame;  
• Installation into  
the solid wall

650°C, 400V~

**experience**

## MONTAŽNE KUTIJE ZA ŠUPLJI ZID INSTALLATION BOXES FOR HOLLOW WALL



**711**

Montažna kutija  
Ø60 x 40 mm  
za šuplji zid  
*Installation box  
Ø60 x 40 mm  
for hollow wall*

• Ugradnja u šuplji zid  
pomoću kandži  
sa vijcima

• Installation into the hollow  
wall by screw clamps

850°C, 400V~




**6533**

Montažna kutija 3M  
za šuplji zid,  
50 mm  
*Installation box 3M  
for hollow wall,  
50 mm*

• Kutija za ugradnju  
trostrukе prirubnice;  
• Ugradnja u šuplji zid  
pomoću kandži  
sa vijcima

• Mounting box for three  
gang mounting frame;  
• Installation into the hollow  
wall by screw clamps

850°C, 400V~

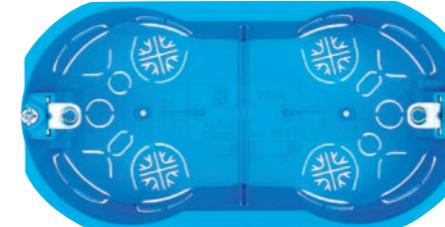


**6534**

Montažna kutija 4M  
za šuplji zid,  
50 mm  
*Installation box 4M  
for hollow wall,  
50 mm*

• Kutija za ugradnju  
četvorostruke prirubnice;  
• Ugradnja u šuplji zid  
pomoću kandži  
sa vijcima

• Mounting box for four  
gang mounting frame;  
• Installation into the hollow  
wall by screw clamps

850°C, 400V~

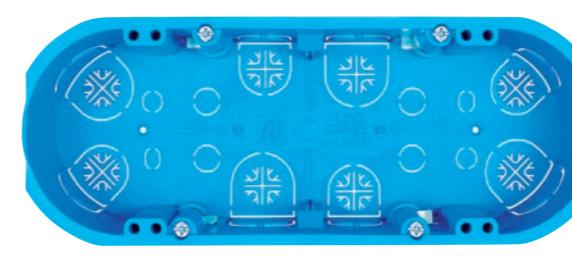

**6537**

Montažna kutija 6M/7M  
za šuplji zid,  
50 mm  
*Installation box 6M/7M  
for hollow wall,  
50 mm*

• Kutija za ugradnju  
sedmorostruke prirubnice;  
• Ugradnja u šuplji zid  
pomoću kandži  
sa vijcima

• Mounting box for seven  
gang mounting frame;  
• Installation into the hollow  
wall by screw clamps

850°C, 400V~



**65327**

Montažna kutija 2 x 7M  
za šuplji zid,  
50 mm  
*Installation box 2 x 7M  
for hollow wall,  
50 mm*

• Kutija za ugradnju  
2 x sedmorostruke  
prirubnice;  
• Ugradnja u šuplji zid  
pomoću kandži  
sa vijcima

• Mounting box for 2 x seven  
gang mounting frame;  
• Installation into the hollow  
wall by screw clamps

850°C, 400V~



## SISTEM KUĆNE AUTOMATIZACIJE HOME AUTOMATION SYSTEM

OBLO living kombinuje kompletno softversko rešenje za kućnu automatizaciju sa internim razvijenim uređajima i partnerskim uređajima, sa ciljem da pokrije rasvetu, bezbednost, sigurnost, energetsku efikasnost i ostale aspekte tržišta kućne automatske.

*OBLO living combines end-to-end software solution for home automation with inhouse developed home automation devices and devices from our partners to cover lighting, security, safety, energy management and other aspects of home automation market.*

### RASVETA

- Daljinski kontrolišete svetla
- Automatski upalite/ugasite svetla
- Podesite svetlo u skladu sa raspoloženjem
- Promenite boju svetla



### LIGHTNING

- Remotely control your lights
- Automatically turn on/off lights
- Set ambient light based on your mood
- Change the color of your lights



### BEZBEDNOST

- Nadgledajte dom pomoću IP kamere
- Detektujte vanredne situacije
- Budite obavešteni o nivou bezbednosti Vašeg doma
- Osigurajte se od provalnika

### SAFETY

- Monitor your home via IP camera
- Detect emergency situations
- Get notified about security flaws in your home
- Keep your home safe from potential burglars

### UŠTEDA

- Daljinski upravljajte sistemima za grijanje i hlađenje
- Pratite potrošnju električne energije
- Smanjite troškove kontrolišući dom na pametniji način
- Budite obavešteni o najvećim potrošačima u kući

### ENERGY

- Remotely control heating and cooling systems
- Monitor power consumption of home appliances
- Control your home in a smarter way to reduce energy bills
- Get notified about high energy consumption sources



### KOMFOR

- Kreirajte jutarnju scenu za savršen početak dana
- Kontrolišite uređaje dok sedite
- Pratite temperaturu, intenzitet svetlosti i vlažnost vazduha
- Proverite vremensku prognozu

### COMFORT

- Create your morning scene for the perfect start of the day
- Control devices without leaving your seat
- Monitor temperature, light intensity and humidity in your home
- Get outdoor weather information



**69400.00**

Kontroler  
za kućnu  
automatiku  
*Home  
automation  
Gateway*

- Napajanje ~110 – 230VAC, 50-60Hz, potrošnja <5W
- Kompatibilan sa ZigBee Home Automation 1.2
- Kompatibilan sa Z-Wave Plus
- Podržava integraciju uređaja zasnovanih na IP tehnologiji
- Povezuje se na internet ruter preko WiFi ili Ethernet kabla
- Ugradeni zvučnik upozorava na vanredne situacije
- Domet do 30m
- Power supply  
~110 – 230VAC,  
50-60Hz power  
consumption <5W
- Compliant with ZigBee  
Home Automation 1.2  
and Z-Wave Plus
- Supports integration  
of IP-based devices
- Connects to Internet  
router via WiFi or  
Ethernet cable
- Built-in buzzer alerts  
emergency situations
- Range up to 30m

**6931.0**

Adapter SMART PLUG  
16A 250V~ sa ZigBee  
upravljanjem  
*SMART PLUG  
16A 250V~ with  
ZigBee control*

- Idealan za daljinsku kontrolu električnih uređaja
- Meri potrošnju energije uređaja priključenog na njega
- Automatski isključuje uređaj kada potrošnja prevažilazi granicu definisanu od strane korisnika
- RGB prsten menja boju u zavisnosti od trenutne potrošnje energije
- *Ideal for remote control of electric devices*
- *Measures power consumption of the device plugged to it*
- *Automatically switches off the device when power consumption exceeds user defined limit*
- *RGB ring changes its color depending on current power consumption*

**72234**

Scenski kontroler  
OBLO Living EXP,  
2 kanala, 1M  
*Scene controller  
OBLO Living EXP,  
2 buttons, 1M*

- Podržava definisanje scena
- Domet do 30m
- Ugradnja u montažnu kutiju Ø60
- Jednostavna integracija u postojeću infrastrukturu

- Allows definition of ambience scenes
- Range up to 30m
- Wall mounted into installation box Ø60
- Easy integration into existing infrastructure

**72250.0**

Set dimer OBLO Living EXP sa prirubnicom i maskom, 1M  
*Dimmer set OBLO Living EXP 200W with mounting frame and cover frame, 1M*

- Za inkadescentne, dimabilne LED i CFL sijalice (dve žice)
- Za inkadescentne, nedimabilne i dimabilne LED i CFL sijalice (tri žice)
- 50-200W
- Domet do 30m
- Ugradnja u montažnu kutiju Ø60
- *For incandescent, dimmable LED and CFL bulbs (2-wire)*
- *For incandescent, dimmable LED and CFL bulbs (3-wire)*
- *50-200W*
- *Range up to 30m*
- *Wall mounted into installation box Ø60*

**72235.00**

Set scenski kontroler  
OBLO Living EXP,  
4 kanala,  
sa maskom 2M  
*Battery scene controller set OBLO Living EXP, 4 buttons, with cover frame, 2M*

- Podržava definisanje 8 scena sa 4 dostupna dugmeta (kratak i dug pritisak)
- Ugradeni senzor meri sobnu temperaturu
- Montaža na zid lepljivim trakama ili zavrtnjima, ili se jednostavno prenosi na željeno mesto
- Domet do 30m
- Napajanje baterijsko (1xCR-2450 baterija, uključena)

- Allows definition of 8 scenes with 4 buttons available (short and long press)
- Embedded temperature sensor measures room temperature
- Mounting on the wall with adhesive strips or mounting screws or simply put it wherever you want
- Range up to 30m
- Battery powered (1 x CR2450 battery, pre-installed)

**72231**

Dimer OBLO Living EXP 200W, 1M  
*Dimmer OBLO Living EXP 200W, 1M*

- Za inkadescentne, dimabilne LED i CFL sijalice (dve žice)
- Za inkadescentne, nedimabilne i dimabilne LED i CFL sijalice (tri žice)
- 50-200W
- Domet do 30m
- Ugradnja u montažnu kutiju Ø60
- Do 7 pametnih dimera se može ugraditi u okviru jedne montažne kutije
- *For incandescent, dimmable LED and CFL bulbs (2-wire)*
- *For incandescent, dimmable LED and CFL bulbs (3-wire)*
- *50-200W*
- *Range up to 30m*
- *Wall mounted into installation box Ø60*
- *Up to 7 dimmers INTELL EXP can be installed within one modular installation box*

**72236**

Kontroler roletni  
OBLO Living EXP,  
1 kanal, 1M  
*Shutter controller OBLO Living EXP, 1 button, 1M*

- Podržava definisanje scena
- Domet do 30m
- Ugradnja u montažnu kutiju Ø60
- Jednostavna integracija u postojeću infrastrukturu

- Allows definition of ambience scenes
- Range up to 30m
- Wall mounted into installation box Ø60
- Easy integration into existing infrastructure

**69609.0**

Senzor za vrata i prozore  
OBLO Living sa ZigBee komunikacijom  
*Door / window sensor OBLO Living with ZigBee control*

- Obaveštava korisnika o promeni stanja (otvoreno/zatvoreno)
- Ugradeni senzor meri sobnu temperaturu
- Tamper prekidač upozorava na neovlašćene aktivnosti
- Ugradnja pomoći lepljive trake ili zavrtnja
- Domet do 30m
- Napajanje baterijsko (1xCR-2450 baterija, uključena)
- *Informs the end user about contact state changes (open/close)*
- *Embedded temperature sensor measures room temperature*
- *Tamper switch alerts unauthorized activities*
- *Adhesive strips or screws mounting*
- *Range up to 30m*
- *Battery powered (1 x CR2450 battery, pre-installed)*

**72254.0**

Set priključnica/sklopka  
OBLO Living EXP,  
2 kanala, sa prirubnicom i maskom 3M  
*High load socket / switch set OBLO Living EXP, 2 buttons, with mounting frame and cover frame, 3M*

- Idealan za daljinsku kontrolu električnih uređaja
- Kontroliše uređaje do 2200W snage
- Meri potrošnju energije priključenog uređaja
- Automatski isključuje uređaj kada potrošnja prevažilazi granicu definisanu od strane korisnika
- Domet do 30m

- Ideal for remote control of electric devices
- Up to 2200W load control
- Measures power consumption of the device plugged into it
- Automatically switches off the device when power consumption exceeds user defined limit
- Range up to 30m

**72251.0**

Set scenski kontroler  
OBLO Living EXP,  
1 kanal, sa prirubnicom i maskom, 1M  
*Scene controller set OBLO Living EXP, 1 button, with mounting frame and cover frame, 1M*

- Podržava definisanje scena
- Domet do 30m
- Ugradnja u montažnu kutiju Ø60
- Jednostavna integracija u postojeću infrastrukturu
- *Allows definition of ambience scenes*
- *Range up to 30m*
- *Wall mounted into installation box Ø60*
- *Easy integration into existing infrastructure*

**72253.0**

Set elektronska sklopka OBLO Living EXP sa prirubnicom i maskom 1M  
*High load switch set OBLO Living EXP with mounting frame and cover frame, 1M*

- Idealan za daljinsku kontrolu električnih uređaja
- Automatski isključuje uređaj kada potrošnja prevažilazi granicu definisanu od strane korisnika
- Domet do 30m

- Ideal for remote control of electric devices
- Automatically switches off the device when power consumption exceeds user defined limit
- Range up to 30m

**72252.0**

Set scenski kontroler  
OBLO Living EXP,  
2 kanala, sa prirubnicom i maskom, 1M  
*Scene controller set OBLO Living EXP, 2 buttons, with mounting frame and cover frame, 1M*

- Podržava definisanje scena
- Domet do 30m
- Ugradnja u montažnu kutiju Ø60
- Jednostavna integracija u postojeću infrastrukturu
- *Allows definition of ambience scenes*
- *Range up to 30m*
- *Wall mounted into installation box Ø60*
- *Easy integration into existing infrastructure*

**72232**

Elektronska sklopka  
OBLO Living EXP,  
2000W, 1M  
*High load switch OBLO Living EXP 2000W, 1M*

- Idealan za daljinsku kontrolu električnih uređaja
- Automatski isključuje uređaj kada potrošnja prevažilazi granicu definisanu od strane korisnika
- Domet do 30m

- Ideal for remote control of electric devices
- Automatically switches off the device when power consumption exceeds user defined limit
- Range up to 30m

**69600**

Senzor za CO  
INTELL sa ZigBee  
komunikacijom  
*CO sensor INTELL  
with ZigBee control*

- Senzor za detekciju ugljen-monoksida u prostoru
- Domet do 40m
- Napajanje baterijsko (DC3V baterija, uključena)
- Zvučni alarm 85dB/1m
- Detects Carbon Monoxide in the room
- Range up to 40m
- Battery powered (DC3V lithium battery, pre-installed)
- Sound alarm 85dB/1m

**69504**

Kontroler klima  
uredaja INTELL  
0-10V sa Z-Wave  
komunikacijom  
*AC controller  
INTELL 0-10V  
with Z-Wave  
control*

- Domet do 30m
- IR domet do 8m
- Ugrađeni IR emitери u 5 smerova i 3.5mm priključak za dodavanje dodatnih spoljnih IR emitera
- Napajanje 5VDC, 100mA
- Range up to 30m
- IR range up to 8m
- Built-in 5 direction IR emitters (hemispherical coverage), plus 3.5mm jack for external wired IR emitter
- Power 5VDC, 100mA

**69605**

Detektor  
temperature  
INTELL sa Z-Wave  
komunikacijom  
*Temperature  
controller INTELL  
with Z-Wave  
control*

- Domet do 30m
- Napajanje baterijsko (2xAA baterija 1.5V)
- Range up to 30m
- Battery powered (2 x AA batteries, 1.5V)

**69601**

Detektor dima  
INTELL sa ZigBee  
komunikacijom  
*Smoke sensor  
INTELL with ZigBee  
control*

- Senzor za detekciju dima u prostoru
- Domet do 40m
- Napajanje baterijsko (DC3V baterija, uključena)
- Zvučni alarm 85dB/3m
- Detects smoke in the room
- Range up to 40m
- Battery powered (DC3V lithium battery, pre-installed)
- Sound alarm 85dB/3m

**69505**

LED sijalica  
dimabilna INTELL  
sa ZigBee  
komunikacijom  
*Dimmable LED  
bulb INTELL with  
ZigBee control*

- Domet do 30m
- Za sijalično grlo E27
- Napajanje 110-230VAC ±10%
- 50/60Hz
- Fluks svetlosti (lumen) 806lm
- Detects smoke in the room
- Range up to 40m
- Battery powered (DC3V lithium battery, pre-installed)
- Sound alarm 85dB/3m

**69509**

Termostat za radijator  
INTELL sa Z-Wave  
komunikacijom  
*Radiator thermostat  
INTELL with Z-Wave  
control*

- Domet do 30m
- Opseg podešavanja temp. 4-28 °C
- Maksimalna temp. vode 90 °C
- Napajanje baterijsko (2xAA baterija 1.5V)
- Range up to 30m
- Temperature setpoint range 4-28 °C
- Max water temperature 90 °C
- Battery powered (2 x AA batteries, 1.5V)

**69602**

Detektor vode  
INTELL sa ZigBee  
komunikacijom  
*Flood sensor  
INTELL with  
ZigBee control*

- Detektor vode usled pucanja vodovodne cevi, kvara slavine...
- Domet do 40m
- Napajanje baterijsko (DC3V baterija, uključena)
- Zvučni alarm 85dB/1m
- Flood sensor due to water pipes breaking, tap failure...
- Range up to 40m
- Battery powered (DC3V lithium battery, pre-installed)
- Sound alarm 85dB/1m

**69506**

Led sijalica  
dimabilna toplo-  
hladno sa ZigBee  
komunikacijom  
*Dimmable LED  
bulb INTELL with  
ZigBee control*

- Domet do 30m
- Za sijalično grlo E27
- Napajanje 110-230VAC ±10%
- 50/60Hz
- Fluks svetlosti (lumen) 806lm
- Temperatura boje 2700-6500 K
- Range up to 30m
- For lamp-holder E27
- Power 110-230VAC ±10%
- 50/60Hz
- Lumen 806lm
- Color temperature 2700-6500 K

**69500**

Elektronski  
regulator roletni  
INTELL sa Z-Wave  
komunikacijom  
*Flush shutter  
INTELL with  
Z-Wave control*

- Domet do 30m
- Nominalna struja opterećenja AC izlaza 2x4A / 230 VAC
- Izlazna snaga AC izlaza 2x920W (230 VAC)
- Range up to 30m
- Rated load current of AC output (resistive load) 2x4A / 230 VAC
- Output circuit power of AC output (resistive load) 2x920W (230 VAC)

**69603**

Detektor pokreta  
INTELL sa ZigBee  
komunikacijom  
*Motion sensor  
INTELL with  
ZigBee control*

- Domet do 40m
- Napajanje baterijsko (DC3V baterija, uključena)
- Ugao detektovanja 110°
- Domet detektovanja 9-12m
- Range up to 40m
- Battery powered (DC3V lithium battery, pre-installed)
- Detecting angle 110°
- Detecting range 9-12m

**69507**

LED sijalica  
dimabilna RGB  
sa ZigBee  
komunikacijom  
*Dimmable LED  
bulb RGB INTELL  
with ZigBee  
control*

- Domet do 30m
- Za sijalično grlo E27
- Napajanje 110-230VAC ±10%
- 50/60Hz
- Fluks svetlosti (lumen) 806lm
- Temperatura boje 2700-6500 K
- Range up to 30m
- For lamp-holder E27
- Power 110-230VAC ±10%
- 50/60Hz
- Lumen 806lm
- Color temperature 2700-6500 K

**69501**

Elektronski  
regulator RGB  
LED trake INTELL  
sa Z-Wave  
komunikacijom  
*Flush RGB LED  
dimer INTELL  
with Z-Wave  
control*

- Domet do 30m
- PWM izlazna frekvencija 488Hz
- Nominalna struja 8A za jedan izlazni kanal, 13A max
- Max snaga 12V – 156W kombinovano; 24V – 312W kombinovano
- Range up to 30m
- PWM output frequency 488Hz
- Nominal current 8A for single output channel, 13A max
- Max load 12V – 156W combined; 24V – 312W combined

**69604**

Detektor pokreta/  
temperature/svetla  
INTELL sa Z-Wave  
komunikacijom  
*Multi sensor INTELL  
with Z-Wave control*

- Domet do 40m
- Napajanje baterijsko (DC3V baterija, uključena)
- Range up to 40m
- Battery powered (DC3V lithium battery, pre-installed)

**69700**

IP kamera za  
unutrašnju upotrebu  
INTELL sa IP  
komunikacijom  
*Indoor IP camera  
INTELL with IP  
control*

- Video**
- Kompresija: H.264/H.264B/H.264H.MJPEG
  - Rezolucija: 1.3M (1280x960)/720P(1280x720)/VGA(640x480)/KVGA(320x240)
- Audio**
- Kompresija: G.711A; G.711Mu; AAC
  - Audio interfejs: Ugrađeni mikrofon izvučnik
- Video**
- Compression: H.264/H.264B/H.264H.MJPEG
  - Resolution: 1.3M (1280x960)/720P(1280x720)/VGA(640x480)/KVGA(320x240)
- Audio**
- Compression: G.711A; G.711Mu; AAC
  - Audio interface: Built-in Mic & Speaker

**69502**

Elektronska  
sklopka INTELL  
2400W sa Z-Wave  
komunikacijom  
*Flush 1 relay  
INTELL 2400W  
with Z-Wave  
control*

- Domet do 30m
- Nominalna struja AC/CD izlaza 1x10A / 230VAC | 1x10A 30VDC
- Snaga AC/DC izlaza 2300W (230VAC) | 240W (24VDC)
- Range up to 30m
- Nominal current AC/CD output 1x10A / 230VAC / 1x10A 30VDC
- Power AC/DC output 2300W (230VAC) / 240W (24VDC)

**69508**

Sirena za signalizaciju  
INTELL sa Z-Wave  
komunikacijom  
*Siren INTELL with  
Z-Wave control*

- Domet do 40m
- Napajanje 230VAC, 50Hz; Max: 30mA
- Rezervna baterija (430mAh lithium baterija, uključena)
- Potrošnja 1,7W
- Range up to 40m
- Power 230 VAC, 50Hz; Max: 30mA
- Backup battery (430 mAh lithium battery, pre-installed)
- Power consumption 1,7W

**69702**

IP kamera za  
spoljnu upotrebu  
INTELL sa IP  
komunikacijom  
*Outdoor IP camera  
INTELL with IP  
control*

- Video**
- Kompresija: H.264+/H.264
  - Rezolucija: 3M(2048x1536/2340x1296)/1080P(1920x1080)/720P(1280x720)/D1(704x576/704x480)/CIF(352x288/352x240)
- Video**
- Compression: H.264+/H.264
  - Resolution: 3M(2048x1536/2340x1296)/1080P(1920x1080)/720P(1280x720)/D1(704x576/704x480)/CIF(352x288/352x240)

**69503**

Elektronski  
regulator INTELL  
0-10V sa Z-Wave  
komunikacijom  
*Flush dimmer  
INTELL 0-10V  
with Z-Wave  
control*

- Domet do 30m
- Max opseg kontrolnog napona -20 / +20 VDC
- Max izvor kontrolnog napona 0-11 VDC
- Range up to 30m
- Max sinking control voltage -20 / +20 VDC
- Max sourcing control voltage 0-11 VDC



**experience**  **antibacterial**

## ANTIBAKTERIJSKI PROGRAM ANTIBACTERIAL PROGRAM

### A73101.0

Taster EXP 1M  
Button EXP 1M


- Taster 1M širine 22,2mm,
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem
- Button 1M width 22,2mm,
- For switches without indication;
- Installation onto the switch by pressing



### A73201.0

Taster sa indikacijom EXP 1M  
Button with indicator EXP 1M

- Taster 1M širine 22,2mm,
- Za sklopke sa indikacijom
- Ugradnja na sklopku utiskivanjem
- Button 1M width 22,2mm,
- For switches without indication;
- Installation onto the switch by pressing



### A73301.0

Taster EXP 2M  
Button EXP 2M

- Taster 2M širine 44,4mm,
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem
- Button 2M width 44,4mm,
- For switches without indication;
- Installation onto the switch by pressing



### A73401.0

Taster sa indikacijom EXP 2M  
Button with indicator EXP 2M

- Taster 2M širine 44,4mm,
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem
- Button 2M width 44,4mm,
- For switches with indication
- Installation onto the switch by pressing



### A70001.0

Poklopac maske (slepi modul) EXP 1M  
Blank module EXP 1M

- Za pokrivanje slepih modula širine 22,2mm
- Ugradnja u noseću prirubnicu utiskivanjem
- For blank module covering 22,2mm width;
- Installation into the mounting frame by pressing



### A74201.0

Keystone nosač EXP 1M  
Keystone holder EXP 1M

- Modul širine 22,2mm za nošenje Keystone konektora
- Ugradnja u noseću prirubnicu utiskivanjem
- Module 22,2mm width for Keystone connectors holding
- Installation into the mounting frame by pressing

## ČUVAR VAŠEG ZDRAVLJA

Antibakterijski program izrađen u standardnom ALING EXPERIENCE dizajnu i isključivo u beloj boji ima funkciju zaštite korisnika od prenošenja bakterija, virusa, mikroba i gljivica čestim dodirivanjem. Dnevno više korisnika dodiruje tastere sklopki, maske i blokove priključnica. Ovo je naročito izraženo u javnim i zdravstvenim ustanovama tako da je prednja površina idealno mesto za razvoj i širenje bakterija.

- Specijalni aditivi na bazi srebrnih jona koji se dodaju u plastične mase tokom vremena uništavaju i sprečavaju dalje širenje bakterija na površini plastike. Zahvaljujući ovim karakteristikama srebra postiže se veoma efikasna i dugotrajna zaštita zdravlja svih korisnika koji dolaze u dodir sa sklopkama, maskama i priključnicama.
- Prvenstveno je značajna primena u svim prostorima gde se zahteva visok stepen higijene kao što su bolnice i druge zdravstvene ustanove, restorani, autobuske i železničke stanice, aerodromi, školske ustanove, stanovi sa bolesnim osobama osetljivim na bakterije i virusе, stanovi zdravstvenih radnika, trgovinski i poslovni centri, javne ustanove (sudovi, opštine, muzeji, bioskopi, sportski objekti i sl.).
- Proizvodi su testirani u skladu sa standardom JIS Z 2801 i poseduju visok stepen redukcije bakterija na površini plastike.
- Održavanje i čišćenje se sprovodi isto kao i kod proizvoda koji nemaju antibakterijsku zaštitu.
- Proizvodi su identični kao i standardni program sa dodatkom oznakom A ispred oznake proizvoda.
- Sve maske antibakterijskog programa označene su znakom raspoznavanja



### A74102.0

Priklučnica dvopolna sa zaštitom kontakata 16A 250V~ EXP 2M  
2 pole socket outlet with safety shutter 16A 250V~ EXP 2M

- Usaglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 60884-1
- Installation into the mounting frame by pressing



### A74104.0T

Priklučnica dvopolna sa transparentnim poklopcom i zaštitom kontakata 16A 250V~ EXP 2M  
2 pole socket outlet with transparent cover and safety shutter 16A 250V~ EXP 2M

- Usaglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 60884-1
- Installation into the mounting frame by pressing



### A72121.0

Priklučnica dvopolna 10A 250V~ EXP1M, CEI 23-50/P11 italijanska  
2 pole socket outlet CEI 10A 250V~ EXP 1M

- Usaglašeno sa CEI 23-50/P11;
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with CEI 23-50/P11;
- Installation into the mounting frame by pressing




### A74263.0

Priklučnica antenska TV IEC završna 5dB EXP 1M  
TV aerial socket end-line 5db IEC EXP 1M

- Usaglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko vijčane veze;
- Pridruženje signala cca 5dB;
- Ugradnja u noseću prirubnicu utiskivanjem

- Complied with IEC 169-2 - M connector;
- Installation of aerial cable by screw terminals;
- Signal attenuation approx. 5dB;
- Installation into the mounting frame by pressing


- Antibacterial program made in standard ALING MODE design and exclusively in white color has a function to protect user from transmission of bacterial, viruses, microbes and fungi during the often touching. During the day more users touches the switch buttons, covering frames and socket blocks. It is especially expressed in the public and medical institutions, so that the front surface is perfect place for growth and spread of bacteria.
- The special additives on silver ions that were added to plastic compounds damage and block bacteria spread on the plastic surface. With the help of this silver characteristic there is very effective and long term protection of health for all users which are in contact with switches, covering frames and sockets.
- At the first time application is important at the places where a high level of hygiene is required like hospitals and other medical institutions, restaurants, bus and train stations, airports, schools, apartments with the sick persons which are sensitive on bacteria and viruses, medical employees apartments, shopping and business centers, public institutions (courthouses, townships, museums, cinemas, sport arenas).
- The products are tested according the standard JIS Z 2801 and they have a high level of bacteria reduction on plastic surface.
- Cleaning and maintenance is same like products without antibacterial protection.
- Products are identical with standard program with additional mark A ahead of product mark.
- All covering frames are marked with sign of recognition

**A70102.0**Maska  
2M EXP,  
ANTIBACTERIAL,  
bela  
  
Cover frame  
2M EXP,  
ANTIBACTERIAL,  
white**Antibacterial**

- Za pokrivanje sklopa sa dva modula;
- Ugradnja na noseću prirbnicu utiskivanjem



- For covering the assembly with two modules;
- Installation onto the mounting frame by pressing

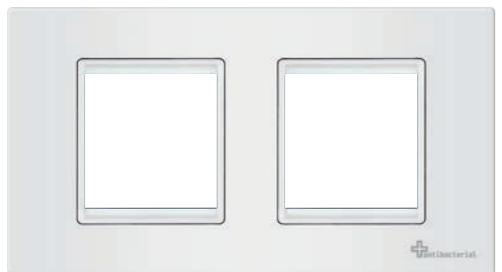**A70122.0**Maska 2x2M EXP,  
ANTIBACTERIAL,  
horizontalna, bela  
  
Cover frame  
2x2M EXP,  
ANTIBACTERIAL,  
horizontal, white

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirbnicu utiskivanjem




- For covering the two assemblies with two modules in horizontal mounted box Ø60;
- Installation onto the mounting frame by pressing

**A70132.0**Maska 3x2M EXP,  
ANTIBACTERIAL,  
horizontalna, bela  
  
Cover frame  
3x2M EXP,  
ANTIBACTERIAL,  
horizontal, white

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirbnicu utiskivanjem



- For covering the three assemblies with two modules in horizontal mounted box Ø60;
- Installation onto the mounting frame by pressing

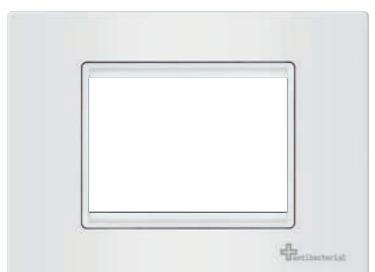**A70103.0**Maska  
3M EXP,  
ANTIBACTERIAL,  
bela  
  
Cover frame  
3M EXP,  
ANTIBACTERIAL,  
white


- Za pokrivanje sklopa sa tri modula;
- Ugradnja na noseću prirbnicu utiskivanjem




- For covering the assembly with three modules;
- Installation onto the mounting frame by pressing

**A70104.0**Maska  
4M EXP,  
ANTIBACTERIAL,  
bela  
  
Cover frame  
4M EXP,  
ANTIBACTERIAL,  
white

- Za pokrivanje sklopa sa četiri modula;
- Ugradnja na noseću prirbnicu utiskivanjem











- For covering the assembly with four modules;
- Installation onto the mounting frame by pressing




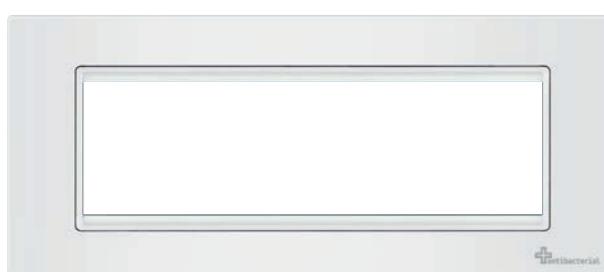
**A70107.0**Maska  
7M EXP,  
ANTIBACTERIAL,  
bela  
  
Cover frame  
7M EXP,  
ANTIBACTERIAL,  
white

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirbnicu utiskivanjem




- For covering the assembly with seven modules;
- Installation onto the mounting frame by pressing

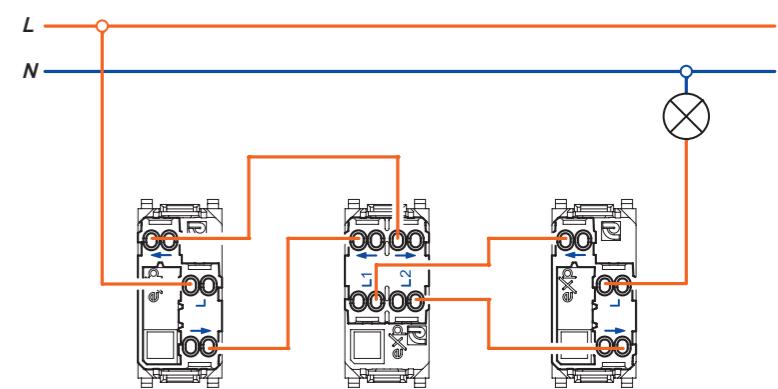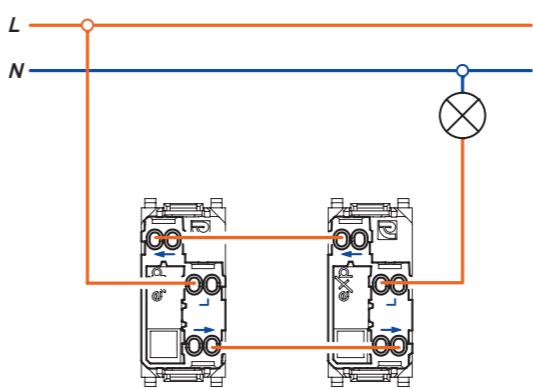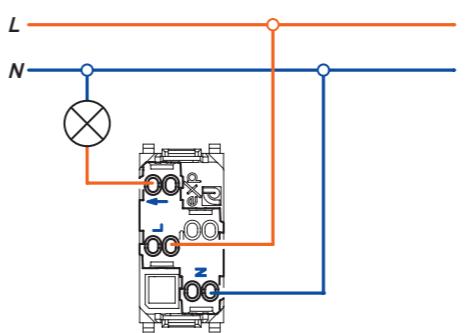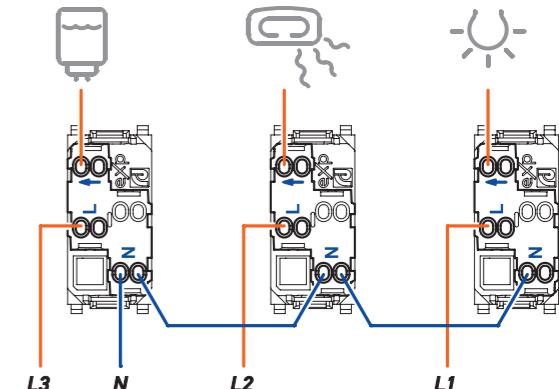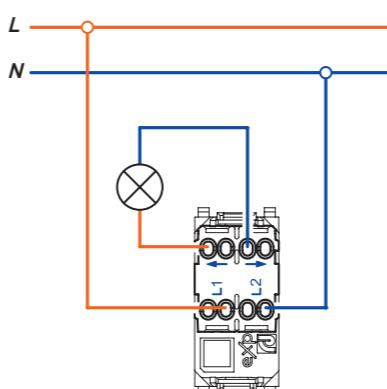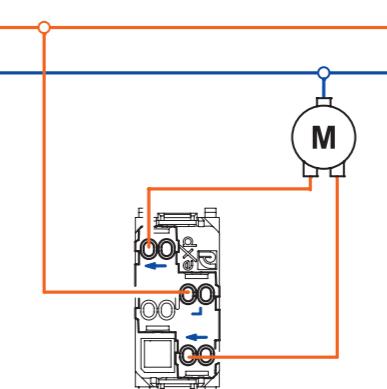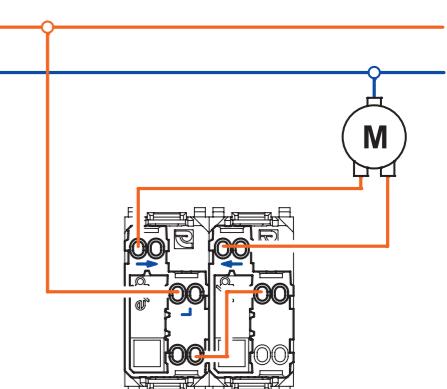
**experience****ŠEME VEZIVANJA  
WIRING DIAGRAMS****72101**  
Sklopka jednopolna  
1 way switch**72111**  
Taster sklopka jednopolna  
Push-button switch**72103**  
Sklopka naizmenična  
2 way switch**72105**  
Sklopka jednopolna sa priključkom za nulli provodnik (indikatorska)  
1 way switch with connection for the neutral conductor (with indicator)**72310**  
Univerzalni set sklopki za kupatilo sa indikacijom  
Universal bathroom switch set with indicator**72106**  
Sklopka dvopolna  
2 pole switch**72118**  
Sklopka za roletne  
Shutters switch**72114**  
Taster sklopka za roletne  
Push-button shutters switch

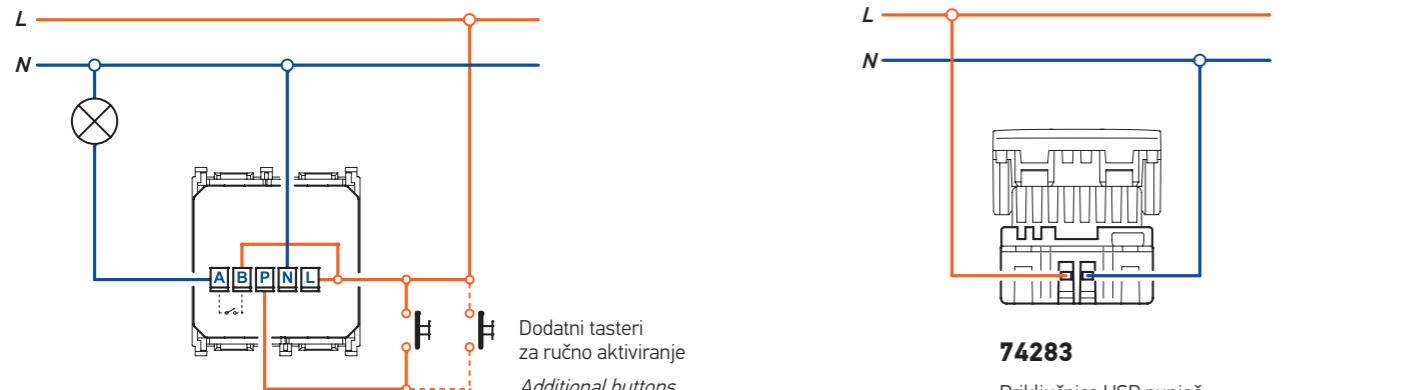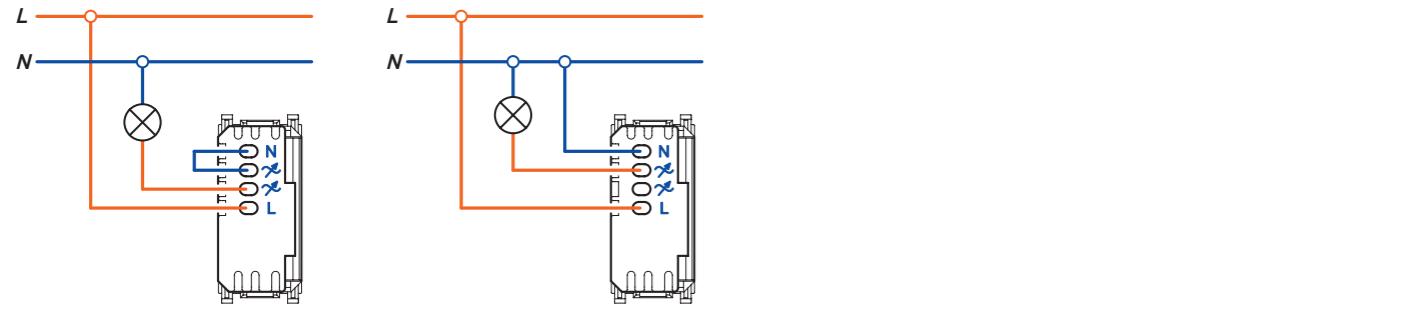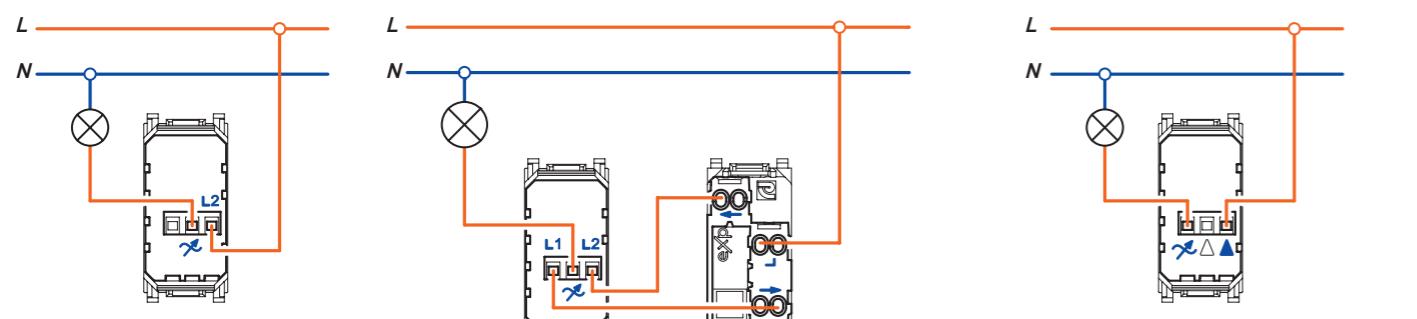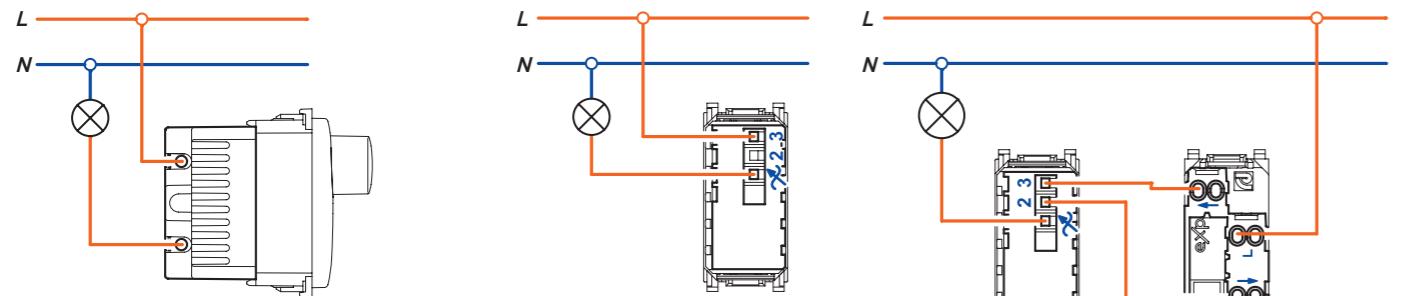

# experience


## TEHNIČKI CRTEŽI TECHNICAL DRAWINGS

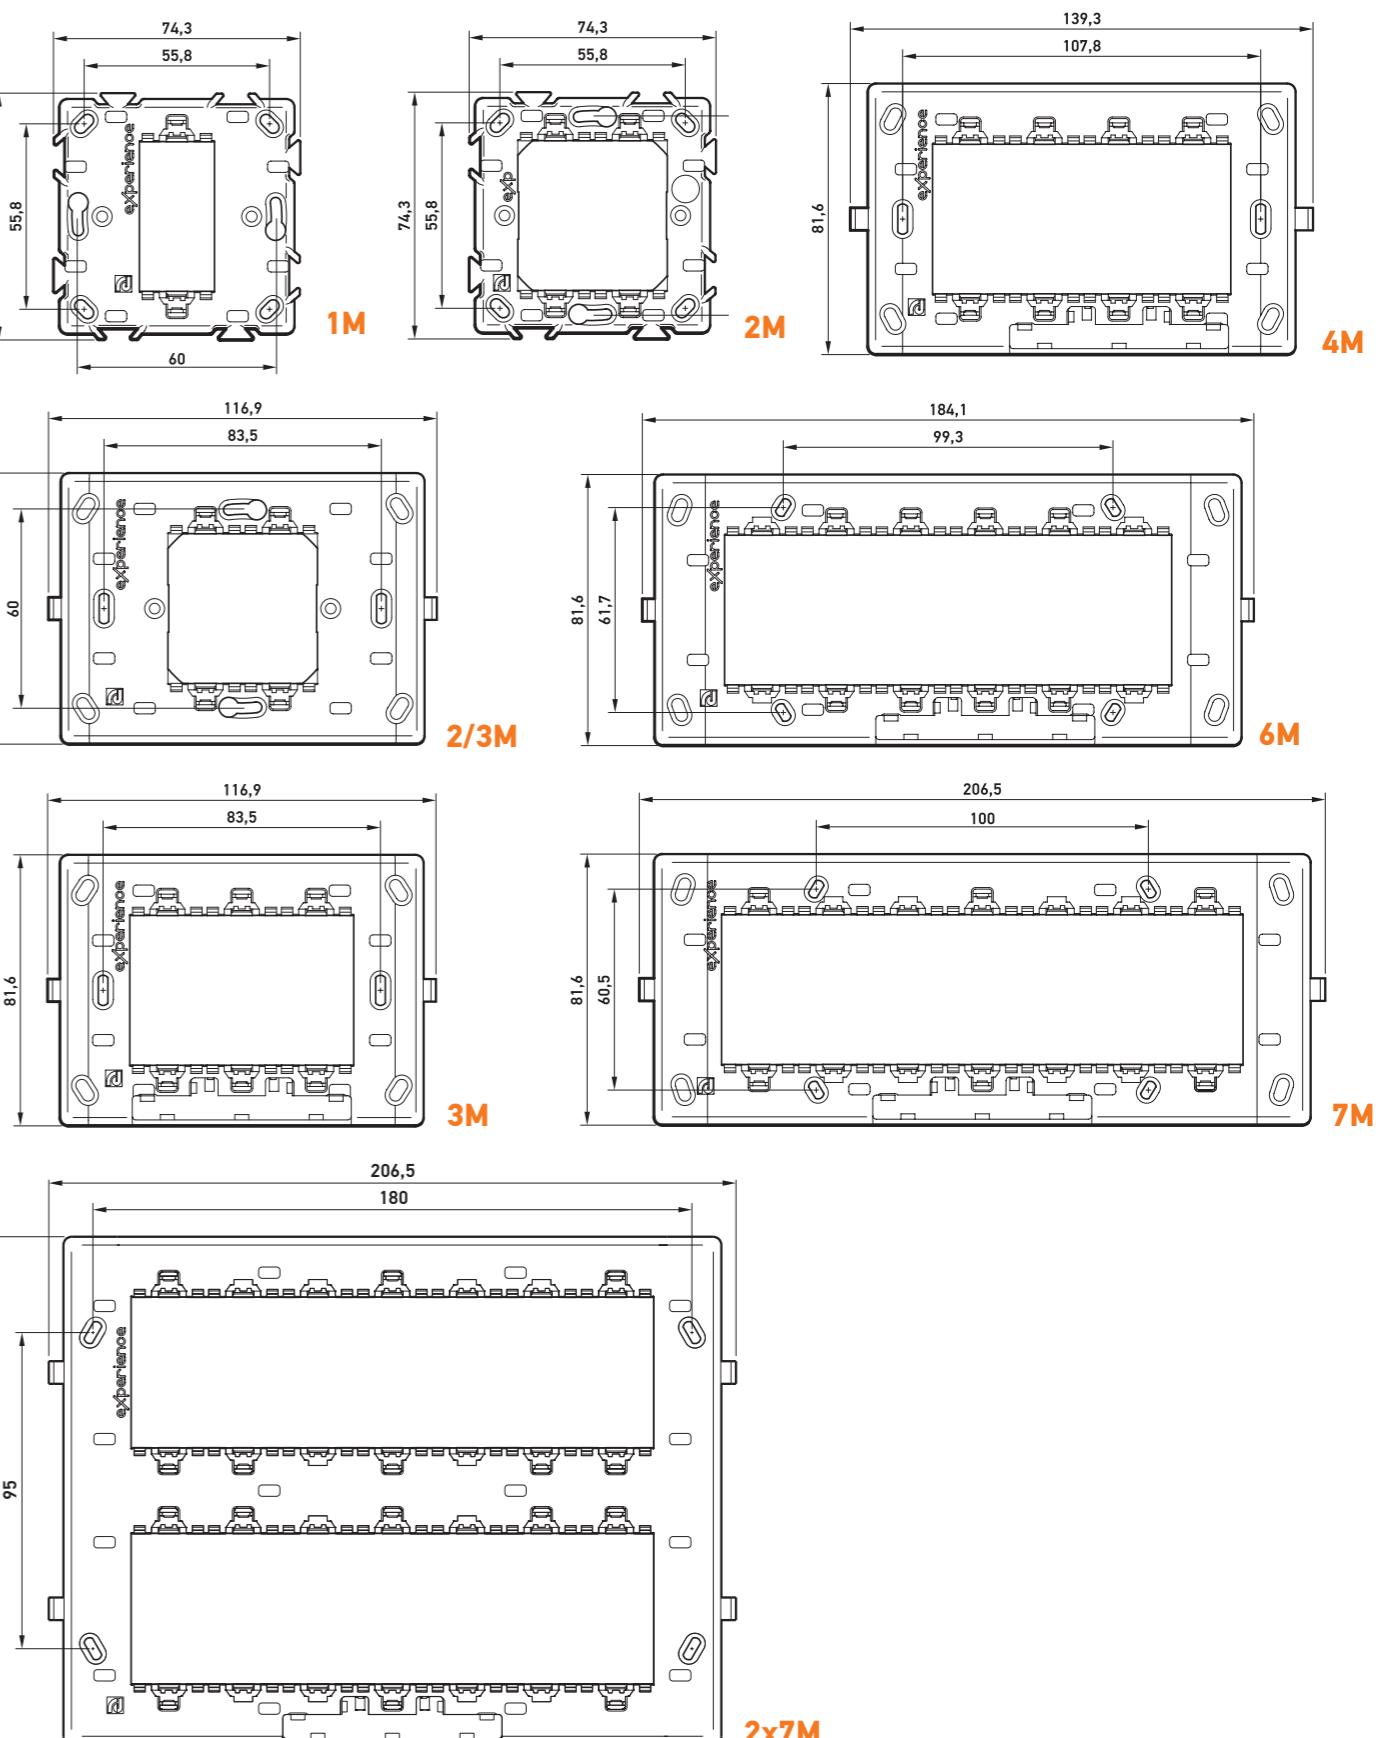

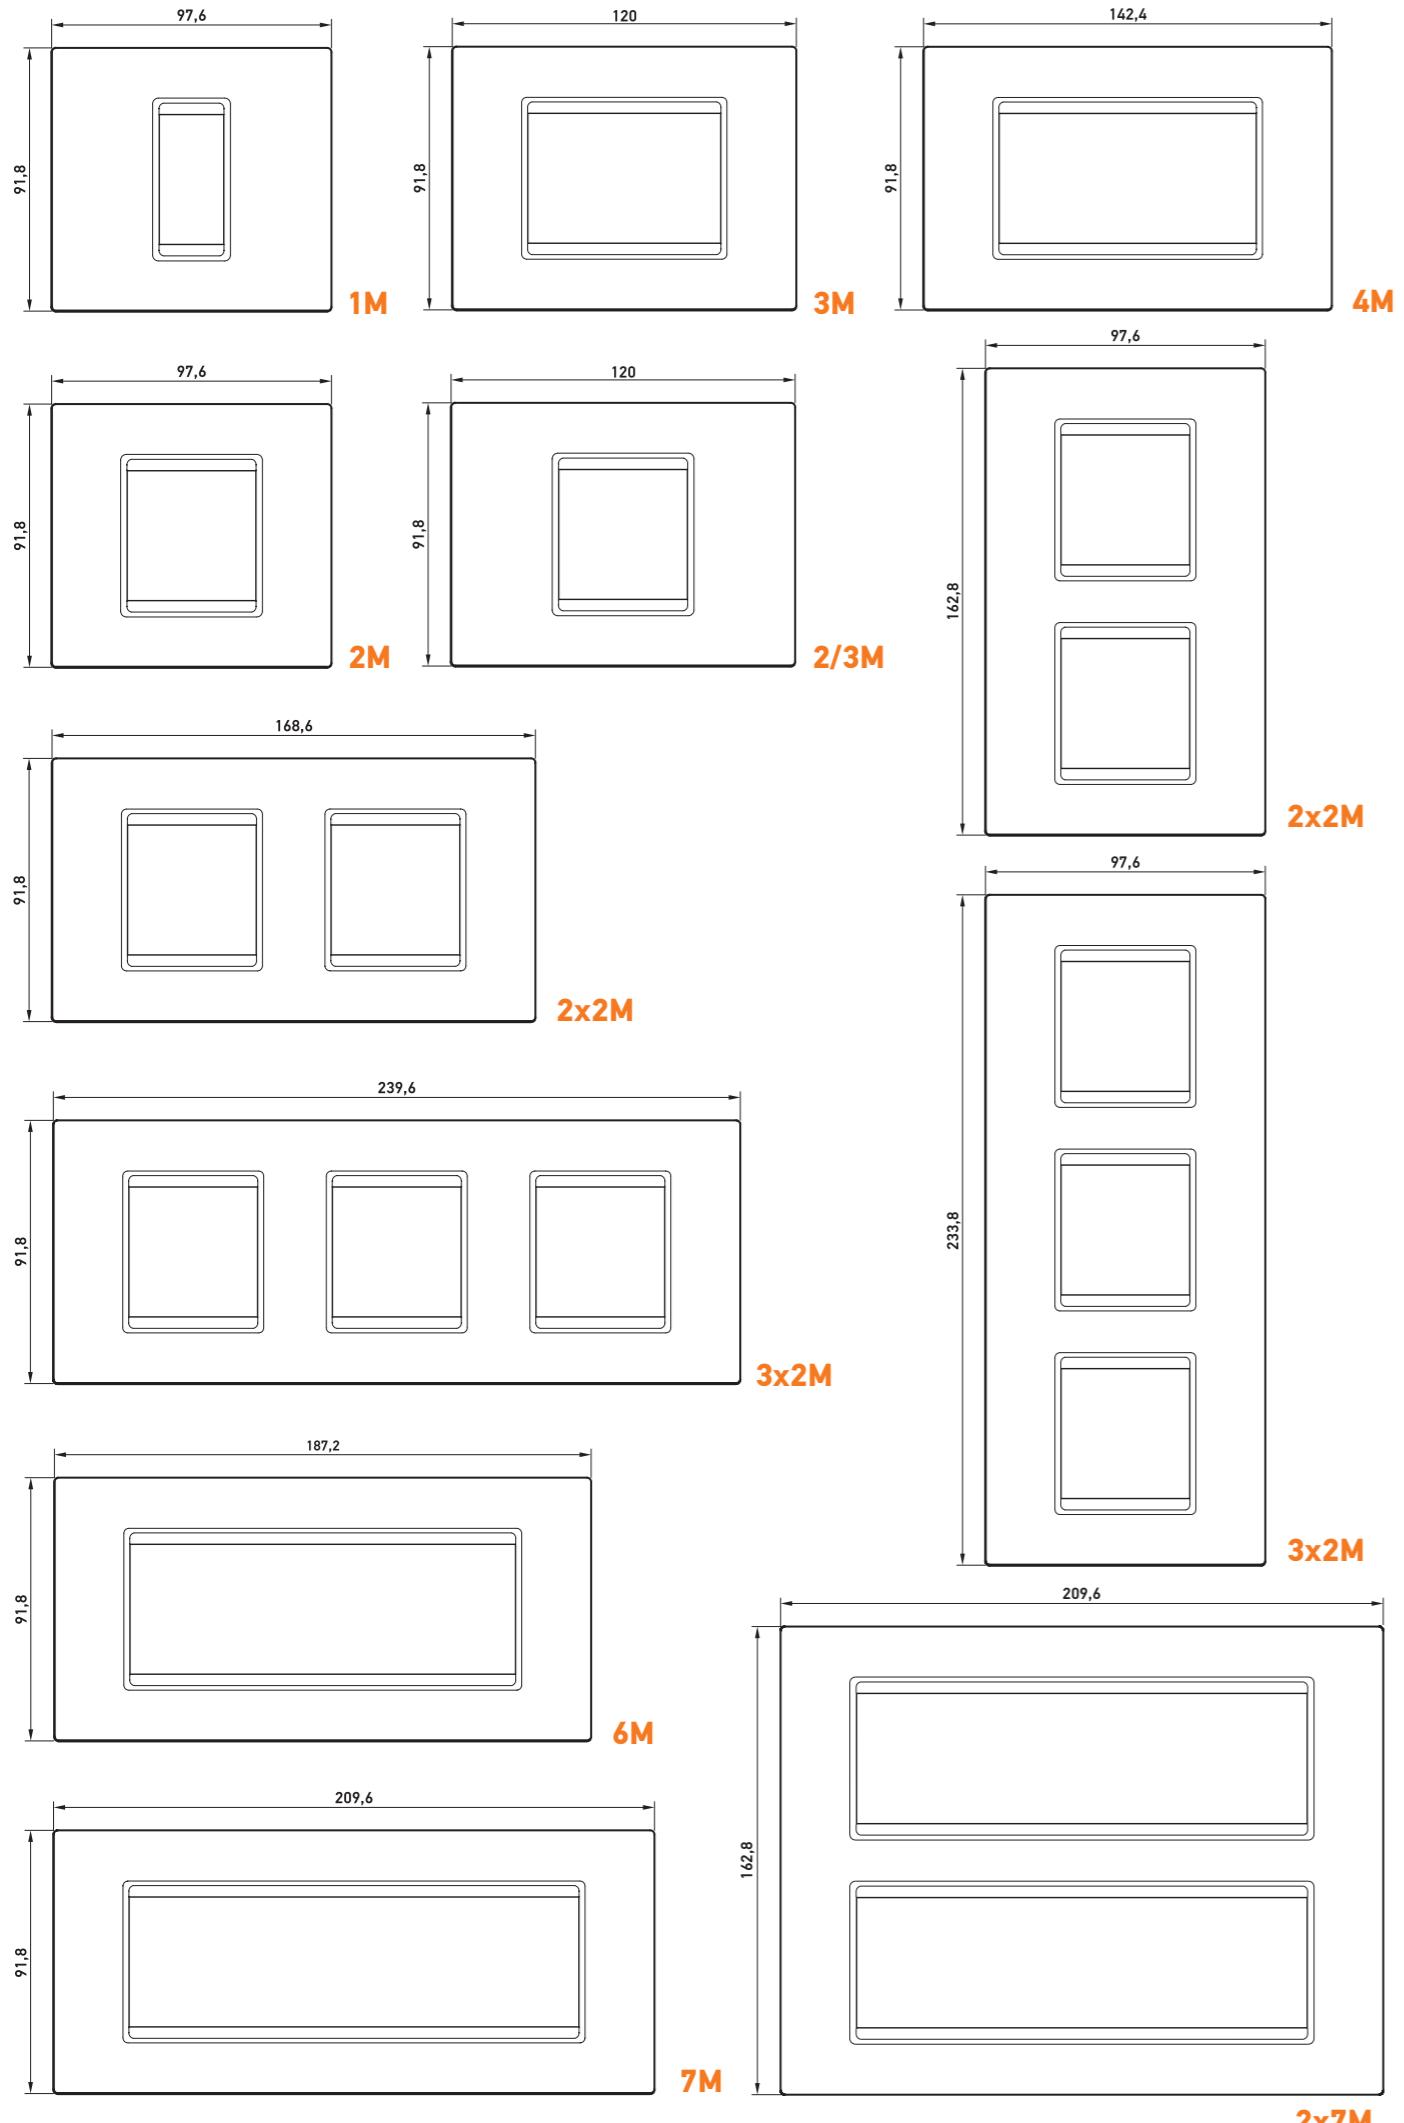

## SADRŽAJ KATALOGA experience THE CATALOG CONTENT

- |  |   |
|--|---|
| 14 SKLOPKE SWITCHES  | 58 COLOR SOFT TOUCH   |
| 15 LED INDIKATORSKA SVETLA LED INDICATION LAMPS                              | 60 EXCLUSIVE WOOD   |
| 16 TASTERI SWITCH BUTTONS  | 62 EXCLUSIVE GLASS  |
| 17 TASTERI SA UGRAVIRANIM SIMBOLIMA SWITCH BUTTONS ENGRAVED WITH THE SYMBOLS | 64 EXCLUSIVE METAL  |
| 18 SKLOPKE ZA ROLETNE SWITCHES FOR SHUTTERS                                  | 66 UGRADNJA INSTALLATION  |
| 19 ELEKTRONIKA ELECTRONICS   | 68 PRIRUBNICE MOUNTING FRAMES   |
| 20 SKLOPKE ZA KUPATILO BATHROOM SWITCHES                                     | 70 PRIRUBNICE SA LED OSVETLJENJEM MOUNTING FRAMES WITH LED LIGHTNING          |
| 21 UNIVERZALNI INDIKATOR UNIVERSAL BATHROOM SET                              | 71 MONTAŽNI PRIBOR INSTALLATION ACCESSORIES                                   |
| 22 PRIKLJUČNICE SOCKET OUTLETS   | 72 NADGRADNE KUTIJE ZA NA ZID WALL MOUNTED BOXES                              |
| 24 KOMUNIKACIJE COMMUNICATIONS   | 73 KUĆISTA IP55 ENCLOSURES IP55   |
| 28 DEKORATIVNE MASKE DECORATIVE FRAMES                                       | 74 MONTAŽNE KUTIJE ZA PUNI ZID INSTALLATION BOXES FOR SOLID WALL              |
| 30 BASIC BELA / WHITE  | 75 MONTAŽNE KUTIJE ZA ŠUPLJI ZID INSTALLATION BOXES FOR HOLLOW WALL           |
| 38 BASIC CRNA / BLACK  | 76 OBLO LIVING SISTEM KUĆNE AUTOMATIZACIJE OBLO LIVING HOME AUTOMATION SYSTEM |
| 46 BASIC SILVER / SILVER   | 82 ANTIBAKTERIJSKI PROGRAM ANTIBACTERIAL PROGRAM                              |
| 54 COLOR VIVID   | 87 ŠEME VEZIVANJA WIRING DIAGRAMS   |
| 56 COLOR METALIC   | 89 TEHNIČKI CRTEŽI TECHNICAL DRAWINGS   |

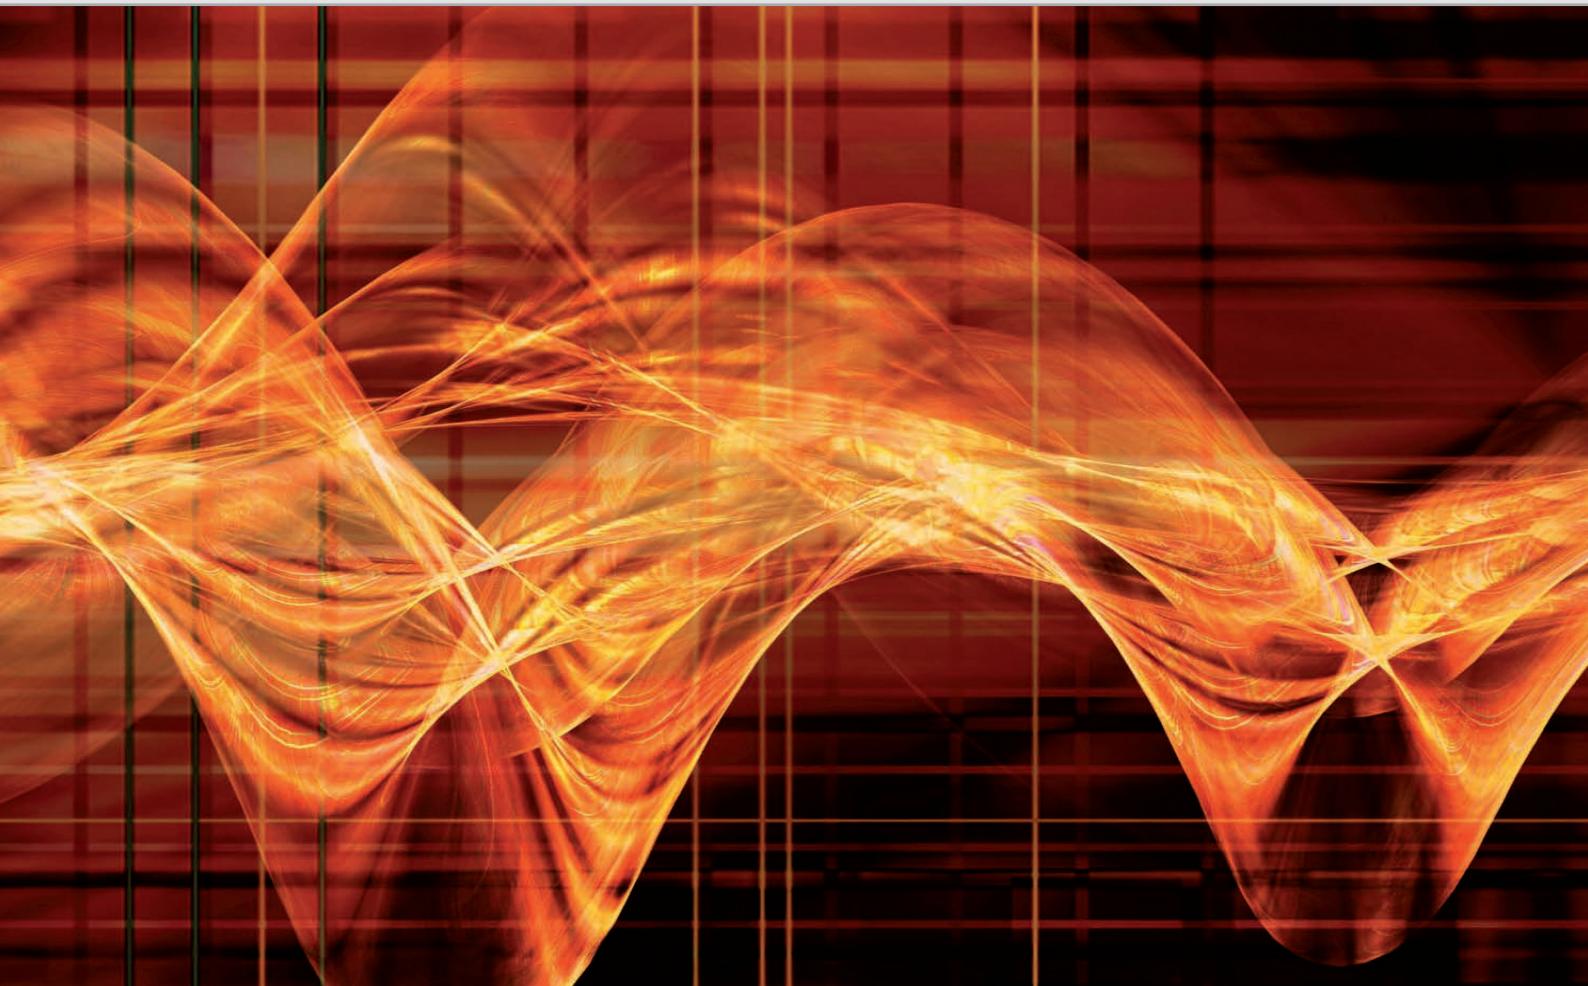

# ALING-CONEL

a: Železnička 10, 21432 Gajdobra, Serbia

t: +381 21 762 674, 762 586

f: +381 21 762 779

e: sales@aling-conel.com

[www.aling-conel.com](http://www.aling-conel.com)