

ALING-CONEL

ISKUSTVO U KOJE VERUJETE

eXperience

YOU TRUST



Od 1984. kvalitet i pouzdanost su glavni prioriteti u kompaniji Aling-Conel. To se podjednako odnosi na proizvode i usluge. Dugogodišnje iskustvo i brojna priznanja omogućila su nam da postanemo regionalni lider i pouzdan partner našim kupcima.

Since 1984, quality and reliability are the top priorities of the company Aling-Conel. This applies equally to products and services. Many years of experience and numerous awards have enabled us to become a regional leader and reliable partner to our customers.

ALING-CONEL

DIZAJN OBLIKUJE NAŠ SVET

eXperience

DESIGN SHAPES OUR WORLD



Dizajnirani da zadovolje najviše sigurnosne standarde i proizvedeni od najkvalitetnijih materijala, Experience proizvodi nude mogućnost izražavanja osobenog stila korisnika u svom domu.

Ultimativna elegancija ogleda se u geometriji oblika, a smele kombinacije boja svakom zidu daće dozu ekstravagancije.

Modularni elementi izrađuju se u 4 boje

Designed to meet the highest safety standards and manufactured from the finest materials, Experience products offer the opportunity to express personal style of every customer.

The ultimate elegance is reflected in the geometry of shapes and daring color combinations will give to any wall a dose of extravagance.

Modular elements are done in 4 colors

VRLO IZRAŽAJAN - VEOMA IMPRESIVAN - NEŽAN NA DODIR
VERY EXPRESSIVE - VERY IMPRESSIVE - A GENTLE TOUCH



Bela
White



Crna soft
Soft black



Silver
Silver




Krem
Beige

TEHNIČKE PREDNOSTI

experience

TECHNICAL ADVANTAGES

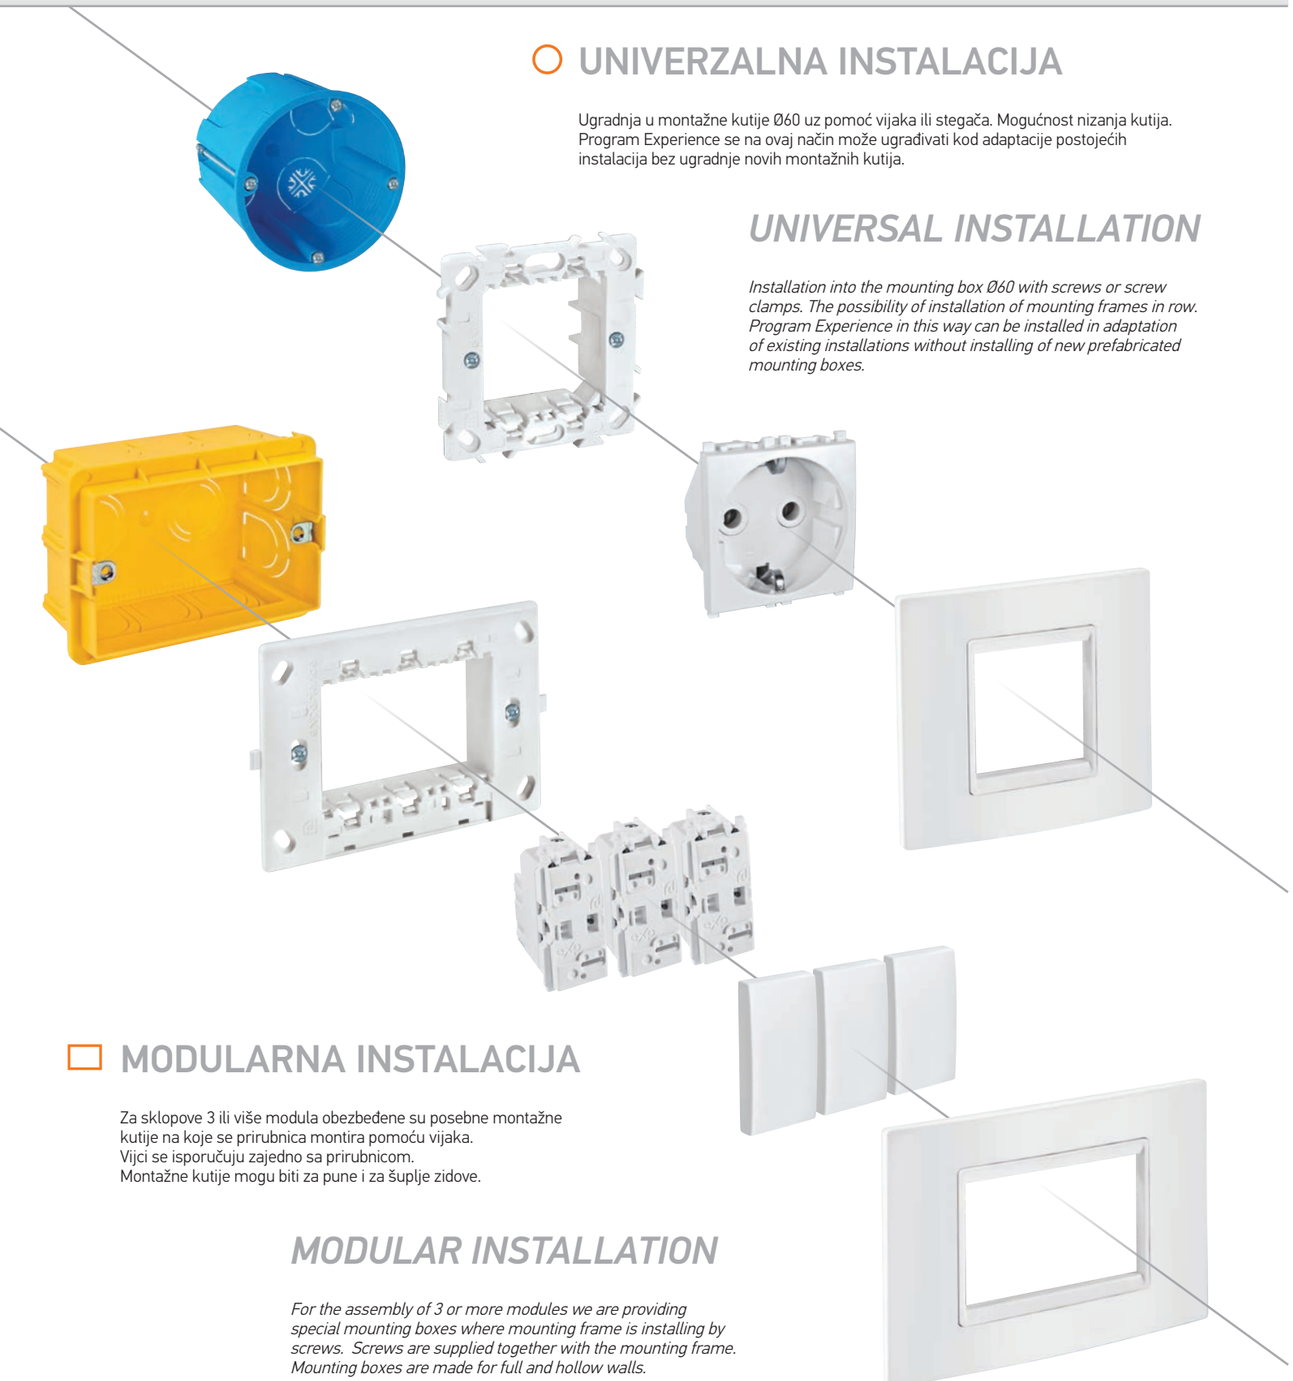

UNIVERZALNA INSTALACIJA

Ugradnja u montažne kutije Ø60 uz pomoć vijaka ili stegača. Mogućnost nizanja kutija. Program Experience se na ovaj način može ugrađivati kod adaptacije postojećih instalacija bez ugradnje novih montažnih kutija.

UNIVERSAL INSTALLATION


Installation into the mounting box Ø60 with screws or screw clamps. The possibility of installation of mounting frames in row. Program Experience in this way can be installed in adaptation of existing installations without installing of new prefabricated mounting boxes.

MODULARNA INSTALACIJA

Za sklopove 3 ili više modula obezbeđene su posebne montažne kutije na koje se prirubnica montira pomoću vijaka.
Vijci se isporučuju zajedno sa prirubnicom.
Montažne kutije mogu biti za pune i za šuplje zidove.

MODULAR INSTALLATION

For the assembly of 3 or more modules we are providing special mounting boxes where mounting frame is installing by screws. Screws are supplied together with the mounting frame. Mounting boxes are made for full and hollow walls.

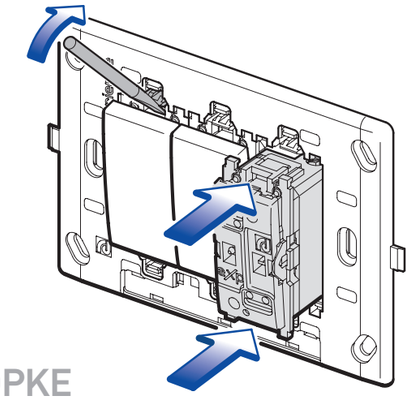

SKLOPKE

Experience sklopke su jasno označene i sigurne za povezivanje zahvaljujući šemi koja se nalazi sa strane sklopke (smanjen je rizik od pogrešne instalacije).

U prirubnicu se postavljaju ručnim utiskivanjem sa prednje strane, bez skidanja prirubnice sa montažne kutije. Demontaža sklopke se takođe vrši sa prednje strane bez skidanja prirubnice sa montažne kutije. Dovoljno je izvijačem otkačiti modul sklopke.

Sklopke imaju jednostavne vijčane priključke koji omogućavaju sigurnu i brzu montažu. Opremljeni su uvodnim otvorima za lakše uvođenje provodnika. Prihvataju dva provodnika preseka do 4mm^2. Vijci su obezbeđeni od ispadanja.

LED indikacije za sklopke (za indikaciju kada je sklopka uključena ili isključena) postoje u dve varijante: sa kontaktima i sa provodnicima. Korisniku je data mogućnost izbora boje indikacije (crvena, plava, zelena, bela).



SWITCHES


Experience switches are clearly marked and safe for connectivity thanks to the scheme, which is located on the side of the switch (reduced risk of incorrect installation).

Installing the module switch into the mounting frame is simply done by hand pressing from the front side, without removing the mounting frame from the mounting box. Disassembly is also done from the front side without removing the mounting frame from the mounting box. It is only needed to remove module by screwdriver.

Switches have simple screw connectors that allow safe and fast installation. Switches have inlets for easier implementation of conductors. Inlets can wire two conductors up to 4mm^2. The screws are secured from falling out.

LED lamp for switches (for indication when the switch is ON or OFF) are offered in two types: with contacts and with conductors. Customer can choose the color of light (red, blue, green, white).



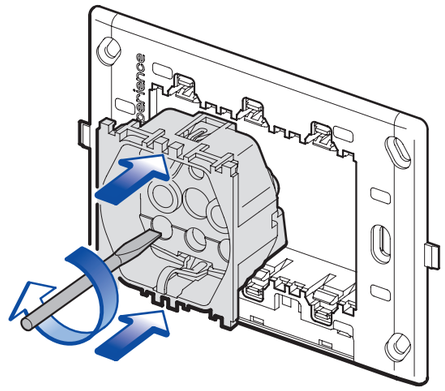

PRIKLJUČNICE

Experience priključnice odgovaraju strogim standardima i sigurnosnim proverama. Priključnice su snabdevene vijčanim priključcima sa uvodima za lakše uvođenje dva provodnika preseka do 2,5mm^2.

Priključnice se rade i u varijanti sa membranama koje obezbeđuju zaštitu za decu sprečavanjem umetanja predmeta u priključnicu.

Montaža i demontaža u prirubnicu se vrši na isti način kao i kod sklopki.

Prednosti utičnica Experience:

- veoma jednostavna montaža i demontaža

- pritezanje provodnika se vrši sa prednje strane i moguće je i kada je priključnica utisnuta u prirubnicu (olakšava laku montažu kratkih provodnika, krutih provodnika, velikog broja provodnika u kutiji)

SOCKET OUTLETS

Experience socket outlets are complied with strict standards and safety checkouts. Socket outlets are supplied with screw connections with introductions to facilitate the introduction of two conductors up to 2.5mm^2.

Sockets are made with membranes that provide protection for children by preventing insertion of objects into the socket outlet.

Installation and disassembly into the mounting frame is done the same way as for the switches.

Experience socket outlet advantages:

- user friendly assembly and dis-assembly

- tightening of the conductors is done from the front and is possible even when the socket outlet is inside the mounting frame (facilitates easy installation of short conductors, hard conductors, a large number of conductors in a mounting box)

TEHNIČKE PREDNOSTI
experience
TECHNICAL ADVANTAGES



REGULATORI

U prirodi najlepše svetlo pojavljuje se u suton. U kući, elektronski regulator vam pomaže da kreirate prijatan svetlosni ambijent u kome ćete se opuštati.

Uz svaki elektronski regulator pakuje se jasno tehničko uputstvo za povezivanje i korišćenje. (slika)

Elektronski regulator za LED rasvetu može da dimuje LED sijalice do 200W. Izuzetne tehničke karakteristike omogućavaju savršeno dimovanje bez treperenja.

Prednosti:

- Višefunkcionalni regulator svetlosti
- Jednostavno programiranje tasterom
- Ugradnja u postojeću instalaciju
- Mogućnost dimovanja dimabilnih sijalica male snage (1-3W)

DIMMERS

In nature the most beautiful light occurs in the twilight. In the house, the electronic controller helps to create a pleasant lighting atmosphere where you can relax.

With each electronic controller is packed a clear technical guidelines for connection and use.

Dimmer for LED can regulate LED lights up to 200W. Exceptional technical characteristics provide a perfect flicker-free dimming.

Benefits:

- Multifunctional Dimmer
- Simple programming button
- Installation in an existing installation
- Possibility of dimming of low power (1-3W) dimmable bulbs



KOMUNIKACIJE

Telefon, TV, Internet – teško je zamisliti sadašnjicu bez komunikacija. Experience komunikacijske priključnice garantuju optimalnu povezanost i visoku pouzdanost prenosa podataka kroz konektore RJ12 i RJ45 koji zadovoljavaju standarde Cat3, Cat5e, Cat6 i Cat6A.

Provodnici se spajaju u konektore bez upotrebe alata (tooless) umetanjem provodnika koji se automatski vezuje sa kontaktima zatvaranjem konektora. Konektori RJ45 zadovljavaju standarde vezivanja TIA/EIA 568A ili 568B.

COMMUNICATIONS

Telephone, TV, Internet – it is hard to imagine the present without communications. Experience communications modules guarantee optimal connection and high reliability of data transfer through the RJ12 and RJ45 connectors that meet the standards Cat3, Cat5e, Cat6 and Cat6A.

The conductors are connected to the connectors without tools (tool-less) by inserting conductor that is automatically associated with contact closure connector. RJ45 connectors meet the standards binding TIA / EIA 568A or 568B.



DEKORATIVNE MASKE

Maske modularnog programa Experience svojom nekonvencionalnom dimenzijom (92mm visine) i svojim jasnim geometrijskim linijama zadovoljavaju i klasične i moderne zahteve korisnika.


Novina Experience modularnog sistema je posebno dizajniran nosač maske, koji je sastavni deo dekorativne maske. Nosač maske proizvodi se u tri boje: bela, crna i silver. Sa prednje strane vidi se kao međuram koji naglašava dizajn maske. Gledano sa strane, maska sa nosačem deluje kao da „lebdi" na zidu.



DECORATIVE COVER FRAMES

Cover frames of modular program Experience with its unconventional dimensions (92mm in height) and it's clear geometric lines meet both classic and modern customer demands.

Novelty of Experience modular program is specially designed frame holder, that is an integral part of decorative cover frame. Frame holder is made in three colors: white, black and silver. From the front it looks like inner frame that emphasizes frame design. Seen from the side, the decorative cover frame together with the frame holder appears to "float" on the wall.

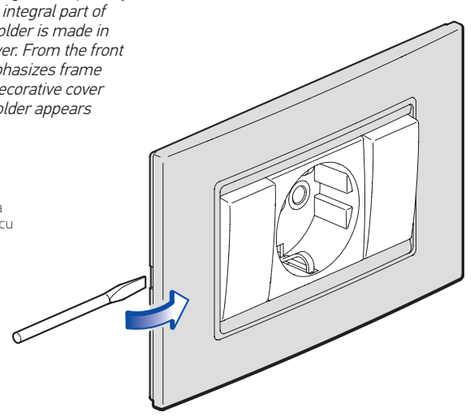

- Prekrivna maska se postavlja bez alata jednostavnim utiskivanjem na prirubnicu
- Skidanje maske je veoma jednostavno i izvodi se izvijačem na predviđenom mestu čime se smanjuje mogućnost oštećenja

- *The covering frame is positioned without any tools by simple pressing onto the flange*
- *The romoval of frame is very simple by using the screw driver on the provided point thus reducing the possibility of any damage*

PRIRUBNICE


Prirubnica je konstruisana tako da poseduje čvrstinu i otpornost na udare i vrlo je jednostavna za ugradnju. Fleksibilna montaža čak i kod neravnih zidova omogućuje da postavljeni sklop uvek stoji ravno.

Mesta za ugradnju na prirubnici i simetrična geometrija prirubnice 2M omogućava horizontalnu i vertikalnu ugradnju u nizu.


MOUNTING FRAMES

Mounting frame is designed to be hard, withstand impacts and is very easy for installation. A flexible installation allows that even at rough walls assembly can be installed straight.

Holes on mounting frame and symmetric geometry of mounting frame 2M are allowing horizontal and vertical installation in a row.

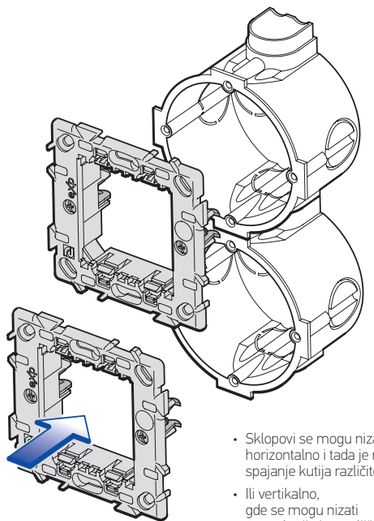

- Sklopovi se mogu nizati horizontalno i tada je moguće spajanje kutija različite veličine.
- Ili vertikalno, gde se mogu nizati samo kutije iste veličine.

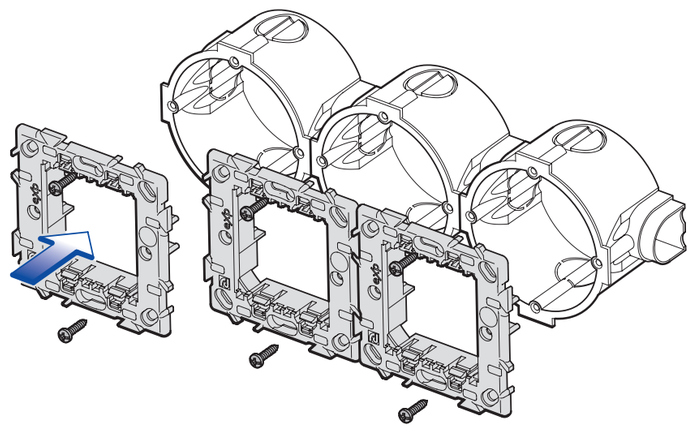


- *The assemblies can be followed in a row horizontally and then it is possible to connect the installation boxes of various sizes.*
- *Or vertically, where only the boxes of the same size can follow in a row.*

experience *Frame*

Harmonična kombinacija ravnih ivica i zakrivljenih površina omogućava da se postigne savršen balans između oštrih definicija i mekih, zaakrivljenih oblika. Ovaj spoj donosi notu sofisticiranosti i elegancije u dizajn, stvarajući vizuelni dojam koji intrigira posmatrača.

The harmonious combination of straight edges and curved surfaces makes it possible to achieve a perfect balance between sharp definitions and soft, curved shapes. This combination brings a touch of sophistication and elegance to the design, creating a visual impression that intrigues the viewer.

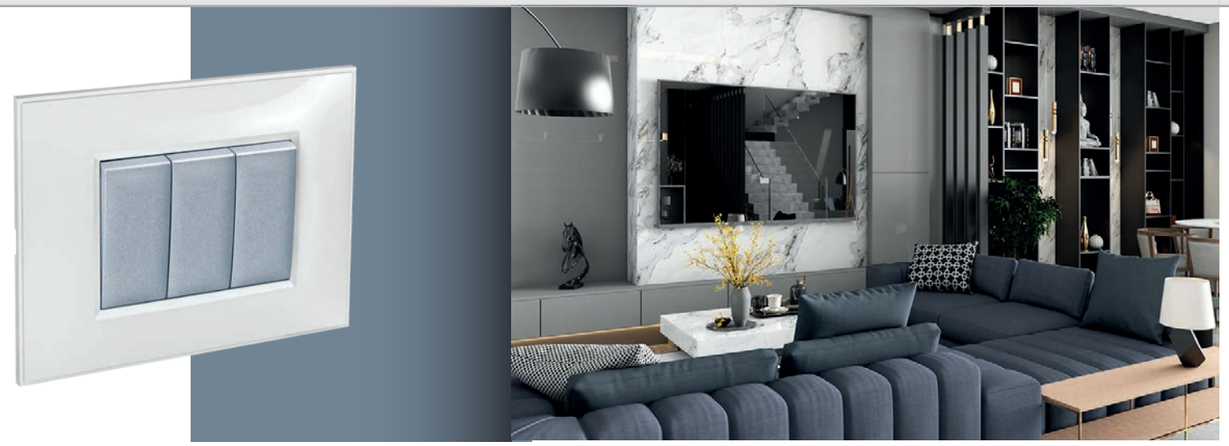





experience


BASIC

BASIC karakteriše ultimativna elegancija i smele kombinacije kontrasta svetlosti i tame dopunjenih srebrom. U BASIC liniji tri su osnovne boje maski: bela, crna i silver. Svaka maska dolazi u 3 kombinacije nosača maske.

BASIC reflects the ultimate elegance and bold contrast of light and dark colors complemented with silver touch. Each mask comes in 3 different combinations with mask holder.





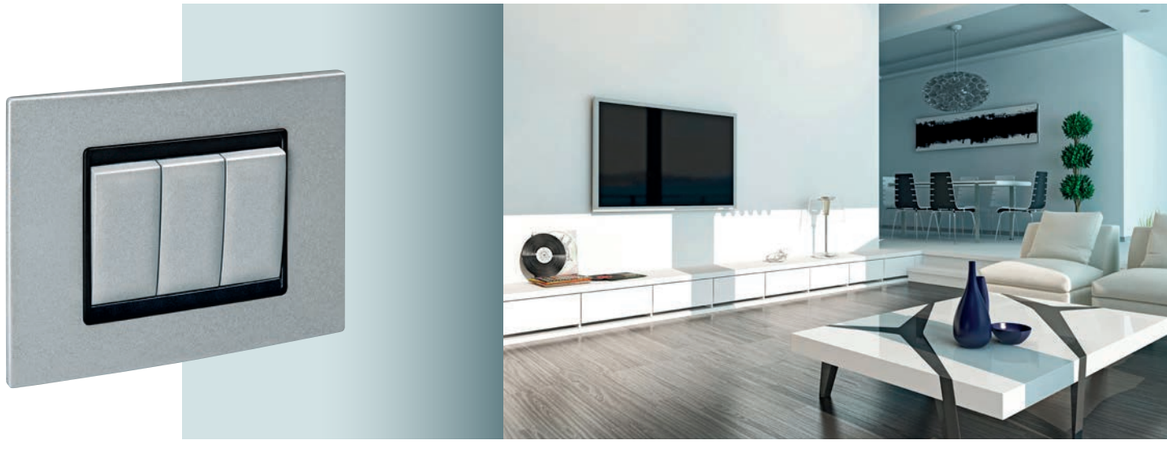

COLOR

COLOR grupu proizvoda čini 16 maski podeljenih u razigrani kolorit pod nazivom VIVID, metalik efekat pod nazivom METALLIC i nežne na dodir SOFT TOUCH.

COLOR consists of 16 cover frames divided into playful colors named VIVID, metallic effect called METALLIC and tender on touch called SOFT TOUCH.

Linija VIVID sastoji se od 4 pastelne boje sa belim nosačem maske (pastel plava, pastel zelena, pastel narandžasta i lavanda) i 3 neobična kontrasta sa crnim nosačem maske (krem, grafit i crvena)

VIVID line has 4 pastel colors with white mask holder (pastel blue, pastel green, pastel orange and lavender) and 3 contrast colors with black mask holder (beige, graphite and red)



Linija METALLIC sastoji se od 7 metalik boja sa istovetnom nijansom nosača maske (metalik zlatna, zlatna sjaj, zlatna saten, antik srebro, aluminijum, metalik zelena, metalik plava).

METALLIC line consists of 7 metallic colors with the same shade of mask holder (metallic gold, shiny gold, satin gold, antique silver, aluminum, metallic green, metallic blue)



Liniju SOFT TOUCH čine 2 osnovne boje: sky blue i soft souch crna. Novina je sky blue boja (bela sa fosforom) koja u mraku svetli plavičastim svetlom.

SOFT TOUCH line has 2 colors: sky blue and soft touch black. The novelty is sky blue color (white phosphorus) that illuminates in the dark bluish light.



EXCLUSIVE

EXCLUSIVE grupa maski proizvedena je od prirodnih materijala i podeljena je na maske izrađene od prirodnog drveta WOOD, sofisticirane maske izrađene od stakla GLASS i robusne maske izrađene od metala METAL. Sve maske u EXCLUSIVE grupi izrađuju se sa crnim nosačem maske.

EXCLUSIVE group mask is made of natural materials and is divided into a mask made of natural Wood, sophisticated masks made of Glass and robust mask made of Metal. All the masks EXCLUSIVE group are made with black mask carrier.

Liniju WOOD čine četiri elegantne pune drvene maske: wenge, orah, trešnja i javor

WOOD line is made of natural wood and consists of four elegant cover frames: wenge, nut, cherry and maple



Linija GLASS sastoji se od 4 staklene maske u boji: kristal bela, kristal crna, ice silver i koral

GLASS line is made of colored glass and consists of four shiny colors: Crystal white, crystal black, ice silver and coral.



Liniju METAL čine četiri maske od metala: titanijum, aluminijum, bakar patina i antracit kristal

METAL line is made of metal and has four colors: titanium aluminium, copper patina and anthracite crystal.





experience

SKLOPKE
SWITCHES

- Usaglašeno sa IEC 60669-1
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60669-1*
- *Installation into the mounting frame by pressing*



72101

Sklopka jednopolna
16AX 250V~ EXP 1M
bez tastera

1 way switch
16AX 250V~ EXP 1M
without button



72103

Sklopka naizmenična
16AX 250V~ EXP 1M
bez tastera

2 way switch
16AX 250V~ EXP 1M
without button



72106

Sklopka dvopolna
10AX 250V~ EXP 1M
bez tastera

2 pole switch
10AX 250V~ EXP 1M
without button



72104

Sklopka ukrsna
16AX 250V~ EXP 1M
bez tastera

Intermediate switch
16AX 250V~ EXP 1M
without button



72111

Taster sklopka jednopolna
16AX 250V~ EXP 1M bez tastera

Push-button switch 16AX 250V~
EXP 1M without button

- Indikacija svetli kada je sklopka isključena
- *Indication turns on when the switch is off*



72105

Sklopka jednopolna 16AX 250V~
EXP 1M sa priključkom za nulti
provodnik (indikacija sa provodnicima)
bez tastera

1 way switch 16AX 250V~ EXP 1M
with connection for the neutral
conductor (indication with contacts)
without button



72107

Sklopka jednopolna 16AX 250V~ EXP
1M sa priključkom na nulti provodnik
(indikacija sa kontaktima) bez tastera

1 way switch 16AX 250V - EXP 1M with
connection for the neutral conductor
(indication with contacts) without button

- Indikacija svetli kada je sklopka uključena
- *Indication turns on when the switch is on*




72117.x

Potezna taster
sklopka jednopolna
16AX 250V~ EXP 1M

Push-button
1 way with cord
16AX 250V~ EXP 1M

Bela *White*	**x = 0**
Crna soft *Soft black*	**x = E1**
Silver *Silver*	**x = S**
Krem *Beige*	**x = 9**

experience



LED INDIKATORSKA SVETLA
LED INDICATION LAMPS

- Za indikaciju kada je sklopka uključena
- Za indikaciju kada je sklopka isključena

- *For indication when the switch is on*
- *For indication when the switch is off*



72181.4

LED indikacija 230V~
sa kontaktima
(za indikaciju) EXP,
crveno

LED lamp 230V~
with contacts
(for indication) EXP,
red



72181.5

LED indikacija 230V~
sa kontaktima
(za indikaciju) EXP,
plavo

LED lamp 230V~
with contacts
(for indication) EXP,
blue




72183.4

LED indikacija 24V~
sa kontaktima
(za indikaciju) EXP,
crveno

LED lamp 24V~
with contacts
(for indication) EXP,
red

- Koristi se za indikaciju kada je sklopka isključena
  (jednopolna sklopka, taster sklopka i naizmenična sklopka sa indikacijom)


- *Used for indication when the switch is off*
  (1 way switch, push - button switch and 2 way switch)



72182.4

LED indikacija 230V~
sa provodnicima
(za indikaciju) EXP,
crveno


LED lamp 230V~
with conductors
(for indication) EXP,
red



72182.5

LED indikacija 230V~
sa provodnicima
(za indikaciju) EXP,
plavo


LED lamp 230V~
with conductors
(for indication) EXP,
blue



72182.0

LED indikacija 230V~
sa provodnicima
(za indikaciju) EXP,
belo

LED lamp 230V~
with conductors
(for indication) EXP,
white




72182.12

LED indikacija 230V~
sa provodnicima
(za indikaciju) EXP,
zeleno

LED lamp 230V~
with conductors
(for indication) EXP,
green


- Koristi se za indikaciju kada je sklopka uključena
  (jednopolna sa priključkom za nulti provodnik, dvopolna)
- Koristi se za indikaciju kada je sklopka isključena (ukrsna)

- *Used for indication when the switch is on*
  (1 way switch with connection for the neutral conductor, 2 pole switch)
- *Used for indication when the switch is off (intermediate switch)*




- **Taster sklopka, jednopolna sa indikacijom sa kontaktima i naizmenična sklopka**
  sa indikacijom koriste indikaciju sa kontaktima koja se jednostavno utisne u ležište (vidi sliku)

- ***Push - button switch, 1 way switch with contacts and 2 way switch***
  with indication are using LED lamp with contacts that is simply pressed into bearing (see image)

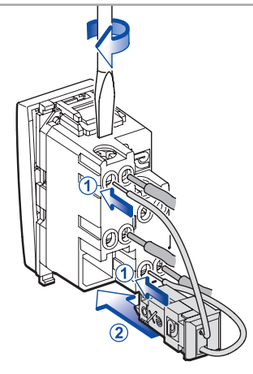

- **Za jednopolnu sklopku sa priključkom za nulti *provodnik***
  koristi se LED indikacija sa provodnicima. Provodnici se postave zajedno sa instalacionim provodnicima (1) i potom se indikacija utisne u ležište (2)

- ***1 way switch with connection for the neutral conductor***
  is using LED lamp with conductors. Conductors are placed together with installation conductors (1) and then indication is pressed into the bearing (2)

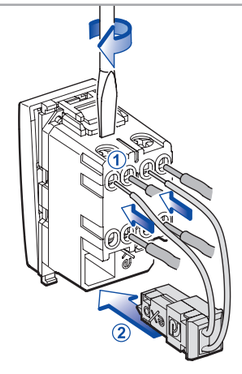

- **Za dvopolnu i ukrsnu sklopku** koristi se LED indikacija sa provodnicima. Provodnici se postave zajedno sa instalacionim provodnicima (1) i potom se indikacija utisne u ležište (2)


- ***2 pole switch and intermediate switch***
  are using LED lamp with conductors. Conductors are placed together with installation conductors (1) and then indication is pressed into the bearing (2)



experience

TASTERI
SWITCH BUTTONS

	Bela *White*	**x = 0**
	Crna soft *Soft black*	**x = E1**
	Silver *Silver*	**x = S**
	Krem *Beige*	**x = 9**

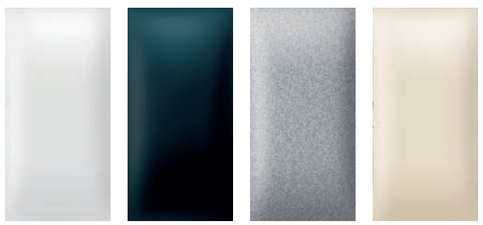


73101.x 1M

Taster EXP 1M

Button EXP 1M

- Taster 1M širine 22,2mm,
- Taster 2M širine 44,4mm
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem


- *Button 1M width 22,2mm,*
- *Button 2M width 44,4mm*
- *For switches without indication;*
- *Installation onto the switch by pressing*

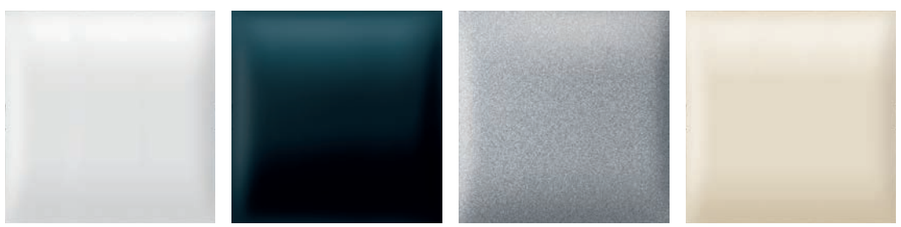

73301.x 2M

Taster EXP 2M


Button EXP 2M

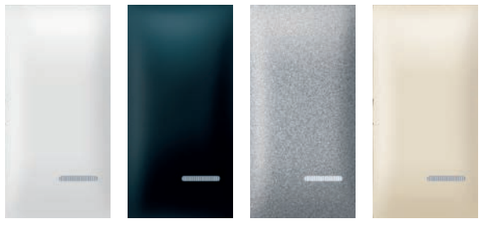

73201.x 1M

Taster sa indikacijom EXP 1M

Button with indicator EXP 1M

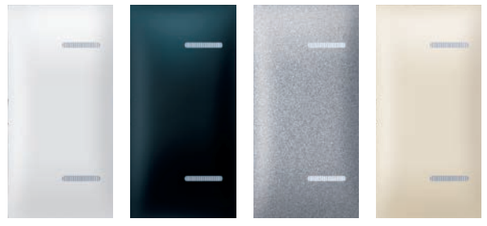



73401.x 2M

Taster sa indikacijom EXP 2M

Button with indicator EXP 2M


- Taster 1M širine 22,2mm
- Taster 2M širine 44,4mm
- Za sklopke sa indikacijom
- Ugradnja na sklopku utiskivanjem

- *Button 1M width 22,2mm*
- *Button 2M width 44,4mm*
- *For switches withindication*
- *Installation onto the switch by pressing*

73221.x 1M

Taster sa duplom indikacijom EXP 1M

Button with double indicator EXP 1M

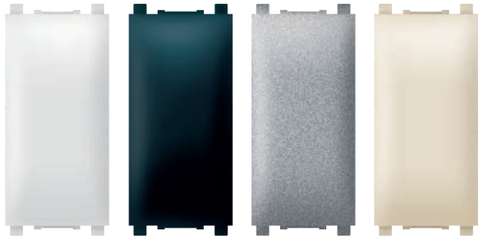


70001.x

Poklopac maske (slepi modul) EXP 1M

Blank module EXP 1M

- Za pokrivanje mesta gde nedostaje modul
- Pokriva širinu jednog modula 22,2mm
- Ugradnja u noseću prirubnicu utiskivanjem

- *For covering the places where module is missing*
- *Covers the width of one module 22,2mm*
- *Installation into the holding frame by pressing*

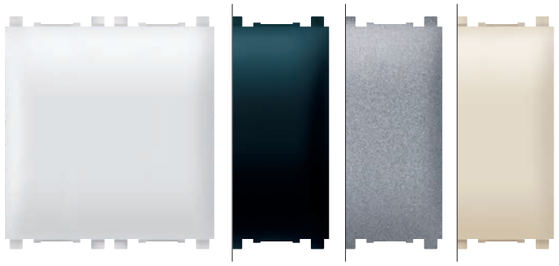

70002.x

Poklopac maske (slepi modul) EXP 2M

Blank module EXP 2M

- Za pokrivanje mesta gde nedostaje modul
- Pokriva širinu dva modula 44,4mm
- Ugradnja u noseću prirubnicu utiskivanjem

- *For covering the places where module is missing*
- *Covers the width of two module 44,4mm*
- *Installation into the holding frame by pressing*

experience




TASTERI SA UGRAVIRANIM SIMBOLIMA
SWITCH BUTTONS ENGRAVED WITH THE SYMBOLS

EXP 1M / **EXP 2M**								
	73104.x / **73304.x**	**73105.x** / **73305.x**	**73106.x** / **73306.x**	**73107.x** / **73307.x**	**73102.x** / **73302.x**	**73102.x** / **73303.x**		
sa oznakom *with symbol*	pojačavanja *amplification*	ključa *key*	0-I *0-I*	posluge *servants*	strelica gore *arrow up*	strelica dole *arrow down*		
• Taster 1M širine 22,2mm, • Taster 2M širine 44,4mm • Za sklopke bez indikacije; • Ugradnja na sklopku utiskivanjem							**x = 0**	Bela *White*
							x = E1	Crna soft *Soft black*
• *Button 1M width 22,2mm,* • *Button 2M width 44,4mm* • *For switches without indication;* • *Installation onto the switch by pressing*							**x = S**	Silver *Silver*
							x = 9	Krem *Beige*

EXP 1M / **EXP 2M**									
	73202.x / **73402.x**	**73203.x** / **73403.x**	**73204.x** / **73404.x**	**73205.x** / **73405.x**	**73206.x** / **73406.x**	**73207.x** / **73407.x**	**73208.x** / **73408.x**	**73209.x** / **73409.x**	**73222.x**
sa indikacijom i oznakom *with indicator and symbol*	svetla *light*	zvona *bell*	bojlera *boiler*	grejalice *heater*	ventilatora *fan*	priključnice *socket*	veš mašine *washing machine*	tuša *shower*	roletne *shutters*
• Taster 1M širine 22,2mm • Taster 2M širine 44,4mm • Za sklopke sa indikacijom • Ugradnja na sklopku utiskivanjem									
• *Button 1M width 22,2mm* • *Button 2M width 44,4mm* • *For switches withindication* • *Installation onto the switch by pressing*									


- Taster se zakači na jednu stranu tipkala, a druga strana se lagano pritisne da klikne taster.
- **Napomena:**
- kod tastera sa indikacijom voditi računa o položaju indikacije (vidi sliku 1 i 2)
- stavljanje tastera je jednostavnije ukoliko se prvo zakači na podignutoj strani tipkala (kao na slici 1 i 2)
- Taster 2M poseduje nosač koji je sastavni deo tastera 2M; zajedno sa postavljanjem tastera 2M potrebno je utisnuti i nosač u prirubnicu (slika 2)

- *The button is hooked to one side of switch, and the other side is lightly pressed until button is clicked.*
- ***Note:***
- *At buttons with indication pay attention of the position of indication (see picture 1 and 2)*
- *placing the button is easier if first snap to the raised side of the buttons (see picture 1 and 2)*
- *Button 2M has a carrier which is an integral part of button 2M; along with setting of button 2M it is necessary to press-in holder into the mounting frame (picture 2)*



Slika 1

Picture 1



Slika 2

Picture 2



experience

SKLOPKE ZA ROLETNE
SWITCHES FOR SHUTTERS

- Par taster sklopki povezanih za upravljanje kretanjem elektromotora za roletne u dva smera
- *A pair of connected push-button switches for the control of shutters' electric motor movement in two directions*



72114.x

Taster sklopka
za roletne
16AX 250V~
EXP 2M

Push-button shutters switch 16A 250v~ EXP 2M



72108.x

Sklopka
za roletne
10AX 250V~
EXP 1M

Shutters switch 10A 250v~ EXP 1M

- za upravljanje kretanjem elektromotora za roletne u dva smera
- tri stabilna položaja I-0-I

- *for control of shutters' electric motor movement in two directions*
- *three stabile positions I-0-I*



72118.x

Taster sklopka
za roletne
10AX 250V~
EXP 1M

Push-button shutters switch 10A 250v~ EXP 1M

- za upravljanje kretanjem elektromotora za roletne u dva smera

- *for control of shutters' electric motor movement in two directions*

experience

ELEKTRONIKA
ELECTRONICS

- Relejni izlaz max 500W za sve tipove sijalica;
- Regulacija vremena isključenosti 10 s - 10 min;
- Regulacija osvetljenosti pri kojoj senzor reaguje 2 - 2000 lx;
- Regulacija svetlosti;
- Mogućnost aktiviranja spoljnim tasterom;
- Vidni ugao po horizontali 110^0;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija

- *Relay exit max 500W for all lamps;*
- *Time regulation 10 s - 10 min;*
- *Light treshold regulation 2 - 2000 lx;*
- *Sensitivity lever regulation;*
- *External push button activation;*
- *Horisontal view angle 110^0;*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication*



72203.x

Infracrveni detektor
pokreta EXP 2M
500W, 230V~/50Hz

Infrared motion detector EXP 2M 500W, 230V~/50Hz

Bela *White*	**x = 0**
Crna soft *Soft black*	**x = E1**
Silver *Silver*	**x = S**
Krem *Beige*	**x = 9**

experience

ELEKTRONIKA
ELECTRONICS





72201.x

Elektronski
regulator
40-300VA
EXP 1M

Dimmer rotative 40-300VA EXP 1M

- Za sijalice sa užarenim vlaknom i halogene sijalice sa standardnim transformatorom 230V~ 40-300W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija

- *For the incadescent lamps and halogen lamps with standard transformer 230V~ 40-300W;*
- *For halogen lamps with standard transformer 40-300VA;*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication*



72202.x

Elektronski
regulator sa
naizmeničnom
sklopkom
EXP 1M , 40-300VA

Dimmer with alternative switch EXP 1M , 40-300VA

- Za sijalice sa užarenim vlaknom i halogene sijalice sa standardnim transformatorom 230V~ 40-300W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija

- *For the incadescent lamps and halogen lamps with standard transformer 230V~ 40-300W;*
- *For halogen lamps with standard transformer 40-300VA;*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication*



72204.x

Elektronski
regulator za
induktivno
opterećenje,
EXP 1M, 40-300VA

Dimmer for inductive load, EXP 1M 40-300VA

- Za sijalice sa užarenim vlaknom i halogene sijalice 230V~ 40-500W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Za halogene sijalice sa elektronskim transformatorom 40-200VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija uključenosti

- *For the incadescent lamps and halogen lamps 230V~ 40-500W;*
- *For halogen lamps with standard transformer 40-300VA;*
- *For halogen lamps with electronic transformer 40-200VA;*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication when dimmer is ON*



72205.x

Elektronski
regulator za LED,
EXP 1M, 200W

Dimmer for LED, EXP 1M, 200W

- Univerzalni taster elektronski regulator za sve vrste sijalica;
- Osnovna namena za CFL i LED dimabilne sijalice do 200W;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija

- *Universal push-button dimmer for all types of bulbs;*
- *The main purpose for dimmable CFL and LED bulbs up to 200W;*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication*



72206.x

Elektronski regulator
sa rotacionom
sklopkom
EXP 1M, 800W

Dimmer rotative 800W EXP 1M

- Za sijalice sa užarenim vlaknom i halogene sijalice sa standardnim transformatorom 230V~ 40-300W;
- Za halogene sijalice sa standardnim transformatorom 40-300VA;
- Usaglašeno sa IEC 60669-2-1;
- Ugradnja u noseću prirubnicu utiskivanjem;
- Indikacija

- *For the incadescent lamps and halogen lamps with standard transformer 230V~ 40-300W;*
- *For halogen lamps with standard transformer 40-300VA;*
- *Complied with IEC 60669-2-1;*
- *Installation into the mounting frame by pressing;*
- *Indication*



eXperience

SET SKLOPKI ZA KUPATILO
BATHROOM SWITCH-SET

- Usaglašeno sa IEC 60669-1;
- Ugradnja u montažnu kutiju pomoću vijaka

- *Complied with IEC 60669-1;*
- *Installation into the mounting box by screws*



UNIVERZALNI KUPATILSKI INDIKATORI
UNIVERSAL BATHROOM SWITCH-SET



72303.00

Set sklopki za kupatilo 3x16A 250V~ sa indikacijom i kutijom 3M, horizontalno (svetlo, grejalica, boiler) EXP

Bathroom switch set 3x16AX 250V~ with indicator and mounting box 3M horizontal (light, heater, boiler) EXP



72304.00

Set sklopki za kupatilo 4x16A 250V~ sa indikacijom i kutijom 4M, horizontalno (svetlo, ventilator, grejalica, boiler) EXP

Bathroom switch set 4x16AX 250V~ with indicator and mounting box 4M horizontal (light, fan, heater, boiler) EXP



72306.00

Set sklopki za kupatilo 3x16A 250V~ sa indikacijom i kutijom 2x2M, vertikalno (svetlo 2M, grejalica, boiler) EXP

Bathroom switch set 3x16AX 250V~ with indicator and mounting box 2x2M vertical (light 2M, heater, boiler) EXP



72308.00

Set sklopki za kupatilo 4x16A 250V~ sa indikacijom i kutijom 2x2M, vertikalno (svetlo, ventilator, grejalica, boiler) EXP

Bathroom switch set 4x16AX 250V~ with indicator and mounting box 2x2M vertical (light, fan, heater, boiler) EXP

- Ugradnja u dve vertikalne nizajuće kutije Ø60 pomoću vijaka


- *Installation into two vertical mounted boxes Ø60 by screws*




72310.00

Set sklopki za kupatilo 3x16A 250V~ sa indikacijom
UNIVERZALNI - horizontalno (svetlo, grejalica, boiler) EXP


Bathroom switch set 3x16AX 250V~ with indicator
***UNIVERSAL** - horizontal (light, heater, boiler) EXP*

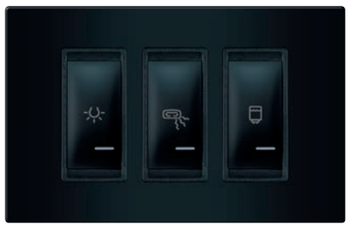

72310.E1E1

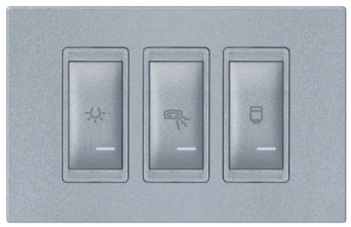


72310.SS

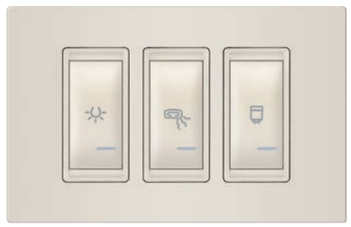

72310.99

Univerzalno rešenje za montažu na već ugrađene kutije (od 108 - 135mm) ili na kutije veličine 4M.
Visina maske iznosi 91,8mm

Universal solution for mounting on existing mounting boxes (from 108 - 135mm) or on mounting boxes 4M.
Decorative frame height is 91,8mm

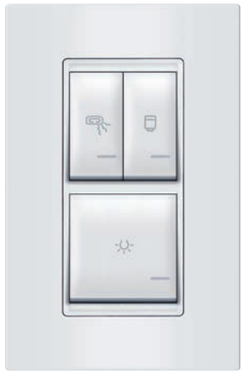

72323.00



72323.E1E1



72323.SS



72323.99

Set sklopki za kupatilo 3x16A 250V~ sa indikacijom
UNIVERZALNI - vertikalni (grejalica, boiler, svetlo 2M) EXP


Bathroom switch set 3x16AX 250V~ with indicator
***UNIVERSAL** - vertical (heater, boiler, light 2M,) EXP*

- Ugradnja u dve vertikalne nizajuće kutije Ø60 pomoću vijaka

- *Installation into two vertical mounted boxes Ø60 by screws*

Univerzalno rešenje za montažu na već ugrađene kutije (od 108 - 135mm) ili na kutije veličine 4M.

Universal solution for mounting on existing mounting boxes (from 108 - 135mm) or on mounting boxes 4M.

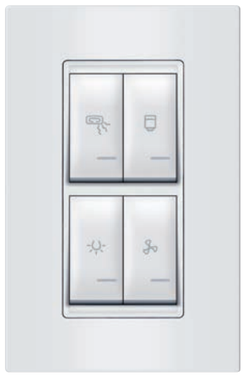


72324.00



72324.E1E1



72324.SS

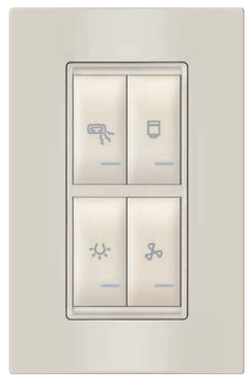

72324.99

Set sklopki za kupatilo 4x16A 250V~ sa indikacijom
UNIVERZALNI - vertikalni (grejalica, boiler, svetlo, ventilator) EXP

Bathroom switch set 4x16AX 250V~ with indicator
***UNIVERSAL** - vertical (heater, boiler, light, fan) EXP*

- Ugradnja u dve vertikalne nizajuće kutije Ø60 pomoću vijaka

- *Installation into two vertical mounted boxes Ø60 by screws*

Univerzalno rešenje za montažu na već ugrađene kutije (od 108 - 135mm) ili na kutije veličine 4M.

Universal solution for mounting on existing mounting boxes (from 108 - 135mm) or on mounting boxes 4M.




eXperience

PRIKLJUČNICE NERASTAVNE
IN SEPARABLE SOCKET OUTLETS

- Usaglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60884-1*
- *Installation into the mounting frame by pressing*




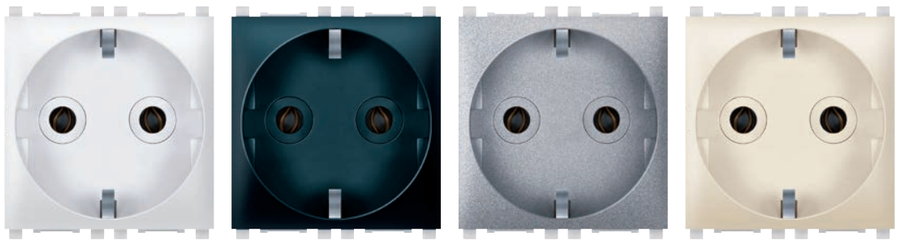

74151.x

Priključnica dvopolna nerastavna
16A 250V~ EXP 2M

2 pole socket outlet in separable 16A 250V~ EXP 2M

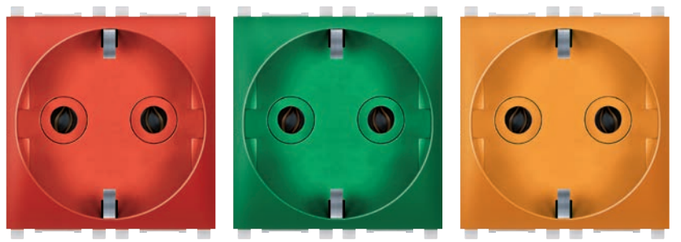

74151.4

crveni blok

red block

- Za mreže sa UPS (sa transformatorom)
- *For power networks with UPS (with transformer)*

74151.12

zeleni blok

green block


- Za mreže sa zaštićenim generatorskim napajanjem
- *For power networks with protected generator supply via transformer*

74151.N

narandžasti blok

orange block


- Za mreže sa generatorskim napajanjem preko transformatora
- *For power networks with generator supply via transformer*

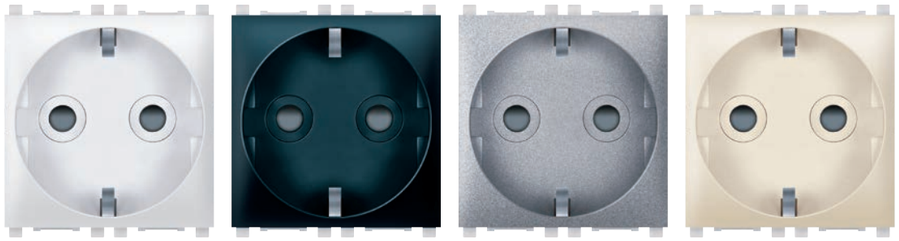

74152.x

Priključnica dvopolna nerastavna sa zaštitom kontakata 16A 250V~ EXP 2M

2 pole socket outlet in separable with safety shutter 16A 250V~ EXP 2M

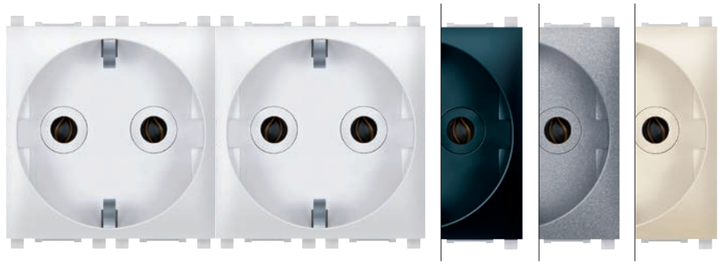


74162.x

Sklop dve priključnice dvopolne nerastavne
16A 250V ~ EXP 2x2M
premoštene

2 pole sokets set in separable 16A 250V~ EXP 2x2M bridged

- Premošteni sklopovi priključnica
- Dovoljno je samo priključiti napojni kabel

- *Socket outlet assembly with bridged contact*
- *One need only connected cable*

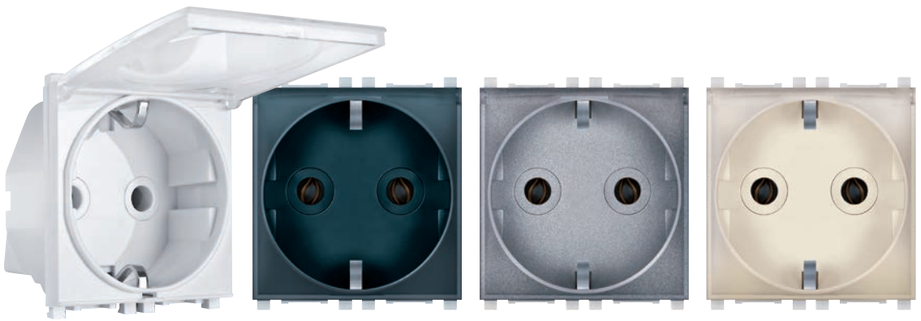

74153.xT

Priključnica dvopolna nerastavna sa transparentnim poklopcem 16A 250V~ EXP 2M


2 pole socket outlet in separable with transparent cover 16A 250V~ EXP 2M



74163.x

Sklop tri priključnice dvopolne nerastavne
16A 250V ~ EXP 3x2M
premoštene

2 pole sokets set in separable 16A 250V~ EXP 3x2M bridged

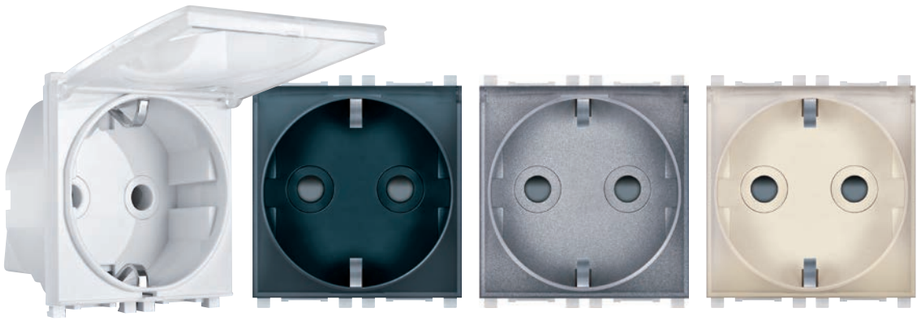

74154.xT

Priključnica dvopolna nerastavna sa transparentnim poklopcem i zaštitom kontakata 16A 250V~ EXP 2M

2 pole socket outlet in separable with transparent cover and safety shutter 16A 250V~ EXP 2M



74121.x

Priključnica dvopolna
10A 250V~ EXP 1M,
CEI 23-50/P11
italijanska

2 pole socket outlet CEI 10A 250V~ EXP 1M



74121.4


Priključnica dvopolna
10A 250V~ EXP 1M,
CEI 23-50/P11 italijanska, crvena

2 pole socket outlet 10A 250V~ EXP 1M, CEI 23-50/P11 italian type, red

- Usaglašeno sa CEI 23-50/P11;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with CEI 23-50/P11;*
- *Installation into the mounting frame by pressing*

- Za mreže sa UPS (sa transformatorom)
- *For power networks with UPS (with transformer)*



eXperience

KOMUNIKACIJE
COMMUNICATIONS



74211.x

Priključnica telefonska Keystone RJ12 6/4 Cat 3 EXP 1M

Telephone socket Keystone RJ12 6/4 Cat3 EXP 1M

- Usaglašeno sa IEC 60603-7;
- Priključak za dve parice (linija + terminal);
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Connection for two pairs (line+terminal);*
- *Installation into the mounting frame by pressing*




74212.x

Priključnica telefonska Keystone RJ12 6/6 Cat 3 EXP 1M

Telephone socket Keystone RJ12 6/6 Cat3 EXP 1M

- Usaglašeno sa IEC 60603-7;
- Za ISDN linije;
- Montaža provodnika bez upotrebe alata;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *For ISDN lines;*
- *Tooless conducting wire installation;*
- *Installation into the mounting frame by pressing*

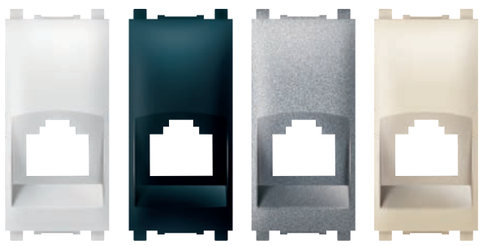

74201.x

Keystone nosač EXP 1M

Keystone holder EXP 1M

- Modul širine 22,2mm za nošenje Keystone konektora
- Ugradnja u noseću prirubnicu utiskivanjem

- *Module 22,2mm width for Keystone connectors holding*
- *Installation into the mounting frame by pressing*



74303

Modul Keystone Linkbasic RJ12 6/4 Cat 3

Module Keystone Linkbasic RJ12 6/4 Cat 3



74305

Modul Keystone Linkbasic RJ45 Cat 5e UTP

Module Keystone Linkbasic RJ45 Cat 5e UTP



74306

Modul Keystone Linkbasic RJ45 Cat 6 UTP

Module Keystone Linkbasic RJ45 Cat 6 UTP



74307

Modul Keystone Linkbasic RJ45 Cat 6A UTP

Module Keystone Linkbasic RJ45 Cat 6A UTP



74313

Modul Keystone Linkbasic RJ12 6/6 Cat 3

Module Keystone Linkbasic RJ12 6/6 Cat 3



74315

Modul Keystone Linkbasic RJ45 Cat 5e FTP

Module Keystone Linkbasic RJ45 Cat 5e FTP



74316

Modul Keystone Linkbasic RJ45 Cat 6 FTP

Module Keystone Linkbasic RJ45 Cat 6 FTP



74317

Modul Keystone Linkbasic RJ45 Cat 6A FTP

Module Keystone Linkbasic RJ45 Cat 6A FTP



74221.x

Priključnica komunikacijska Keystone RJ45 Cat 5e UTP EXP 1M

Data socket Keystone RJ45 Cat5e UTP EXP 1M

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Tooless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



74222.x

Priključnica komunikacijska Keystone RJ45 Cat 5e FTP EXP 1M

Data socket Keystone RJ45 Cat5e FTP EXP 1M

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Tooless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



74223.x

Priključnica komunikacijska Keystone RJ45 Cat 6 UTP EXP 1M

Data socket Keystone RJ45 Cat6 UTP EXP 1M

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Tooless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



74224.x

Priključnica komunikacijska Keystone RJ45 Cat 6 FTP EXP 1M

Data socket Keystone RJ45 Cat6 FTP EXP 1M

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Tooless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



74225.x

Priključnica komunikacijska Keystone RJ45 Cat 6A UTP EXP 1M

Data socket Keystone RJ45 Cat6A UTP EXP 1M

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Tooless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



74226.x

Priključnica komunikacijska Keystone RJ45 Cat 6A FTP EXP 1M

Data socket Keystone RJ45 Cat6A FTP EXP 1M

- Usaglašeno sa IEC 60603-7;
- Montaža provodnika bez upotrebe alata;
- Spajanje prema TIA/EIA-568A ili 568B standardu za raspored parica;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60603-7;*
- *Tooless conducting wire installation;*
- *Connecting according to TIA/EIA-568A or 568B standard for the arrangement of pairs;*
- *Installation into the mounting frame by pressing*



eXperience

KOMUNIKACIJE
COMMUNICATIONS





74261.x

Priključnica antenska TV IEC M /F za individualne sisteme EXP 1M

TV aerial socket IEC M/F for individual systems EXP 1M

- Usaglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 169-2 - M connector;*
- *Installation of aerial cable by F connector;*
- *Without signal attenuation;*
- *Installation into the mounting frame by pressing*



74262.x

Priključnica antenska FM IEC F /F EXP 1M

FM aerial socket IEC F/F EXP 1M

- Usaglašeno sa IEC 169-2 - ženski konektor;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 169-2 - F connector;*
- *Installation of aerial cable by F connector;*
- *Without signal attenuation;*
- *Installation into the mounting frame by pressing*



74263.x

Priključnica antenska TV **završna 5dB** IEC EXP 1M

*TV aerial socket **end-line 5db** IEC EXP 1M*

74264.x

Priključnica antenska TV **prolazna 10dB** IEC EXP 1M

*TV aerial socket **throughpass 10db** IEC EXP 1M*

- Usaglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko vijčane veze;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 169-2 - M connector;*
- *Installation of aerial cable by screw terminals;*
- *Installation into the mounting frame by pressing*



74265.x

Priključnica antenska TV F/F EXP 1M za individualne sisteme SAT

TV aerial socket F/F for individual systems EXP 1M

- Završna za satelitske antene;
- Montaža antenskog kabla preko F konektora;
- Bez prigušenja signala;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Terminal for satellite aerials;*
- *Installation of aerial cable by F connector;*
- *Without signal attenuation;*
- *Installation into the mounting frame by pressing*



74266.x

Priključnica antenska TV/SAT EXP 1M

TV/SAT aerial socket EXP 1M

- TV/SAT antenska priključnica završna;
- TV konektor IEC 60169-2 10-862 MHz;
- SAT konektor IEC 61169-24 tip F 950-2400 MHz;
- Odvodno slabljenje <2dB;
- Ugradnja u noseću prirubnicu utiskivanjem

- *TV/SAT aerial socket final;*
- *TV connector IEC 60169-2 10-862 MHz;*
- *SAT connector IEC 61169-24 type F 950-2400 MHz;*
- *Coupling attenuation <2dB;*
- *Installation into the mounting frame by pressing*



74283.x

USB punjač 2,1A 5V= EXP 2M

USB charger 2,1A 5V= EXP 2M

- Za punjenje elektronskih uređaja putem standardnog USB porta;
- Punjenje dva uređaja istovremeno;
- Usaglašeno sa EN 60950-1 i EMC direktivom;
- Ugradnja u noseću prirubnicu utiskivanjem

- *For charging of electronic devises via standard USB port;*
- *Enables charging of two devices simultaneously;*
- *Complied with EN 60950-1 and EMC directive;*
- *Installation into the mounting frame by pressing*



74289.x

USB punjač 2,1A 5V= EXP 1M

USB C charger 2,1A 5V= EXP 1M

- Za punjenje elektronskih uređaja putem standardnog USB porta;
- Usaglašeno sa EN 60950-1 i EMC direktivom;
- Ugradnja u noseću prirubnicu utiskivanjem

- *For charging of electronic devises via standard USB port;*
- *Complied with EN 60950-1 and EMC directive;*
- *Installation into the mounting frame by pressing*



74284.x

Priključnica USB EXP 1M

USB socket EXP 1M

- Za konekciju USB uređaja i kablova;
- Podržava USB 2.0 standard;
- Ugradnja u noseću prirubnicu utiskivanjem

- *For connection of USB devices and cables;*
- *Supports USB 2.0 standard;*
- *Installation into the mounting frame by pressing*



74286.x

USB tip C punjač 3A/5V= EXP 1M

USB C charger 3A/5V= EXP 1M

- Za punjenje elektronskih uređaja putem USB C porta;
- Usaglašeno sa EN 60950-1 i EMC direktivom;
- Ugradnja u noseću prirubnicu utiskivanjem

- *For charging of electronic devises via USB C port;*
- *Complied with EN 60950-1 and EMC directive;*
- *Installation into the mounting frame by pressing*



74285.x

Priključnica HDMI EXP 1M

HDMI socket EXP 1M

- Za konekciju kablova za prenos signala preko HDMI priključka;
- Ugradnja u noseću prirubnicu utiskivanjem

- *For the transmission of signal through HDMI connector;*
- *Installation into the mounting frame by pressing*



74281.x

Priključnica audio 2xRCA EXP 1M

Audio socket 2XRCA EXP 1M

- Za prenos audio signala - stereo;
- Montaža provodnika lemljenjem;
- Ugradnja u noseću prirubnicu utiskivanjem

- *For the transmission of audio signals stereo;*
- *Installation of conducting wires by soldering;*
- *Installation into the mounting frame by pressing*



74282.x

Priključnica audio/video BNC/BNC EXP 1M

Audio/video socket BNC/BNC EXP 1M

- Za prenos audio ili video signala;
- Montaža kabla preko BNC konektora;
- Ugradnja u noseću prirubnicu utiskivanjem

- *For the transmission of audio or video signals;*
- *Installation of cabel by BNC connector;*
- *Installation into the mounting frame by pressing*

experience *Frame*


DEKORATIVNE **FRAME** MASKE
*DECORATIVE **FRAME** MASKS*


Harmonična kombinacija ravnih ivica i zakrivljenih površina omogućava da se postigne savršen balans između oštrih definicija i mekih, zaakrivljenih oblika. Ovaj spoj donosi notu sofisticiranosti i elegancije u dizajn, stvarajući vizuelni dojam koji intrigira posmatrača.

The harmonious combination of straight edges and curved surfaces makes it possible to achieve a perfect balance between sharp definitions and soft, curved shapes. This combination brings a touch of sophistication and elegance to the design, creating a visual impression that intrigues the viewer.



































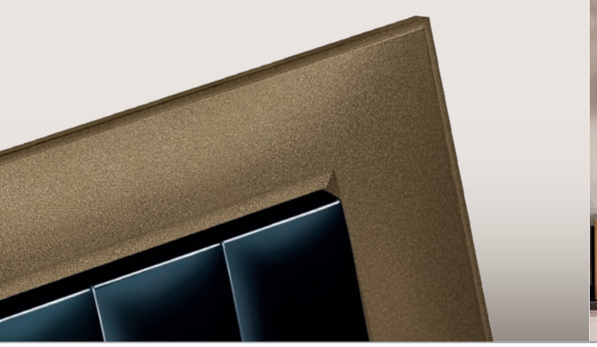



experience *Frame*

Proizvode se u čak 11 boja,
kako bi se besprekorno ukombinovale
u bilo koji ambijent vašeg doma
ili poslovnog prostora.

Produced in as many as 11 colors,
so they can be seamlessly combined
into any ambience of your home
or office space.

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- *Installation onto the mounting frame by pressing*
- *For covering the assembly of modules;*





x = 0
Bela maska
White frame






x = E
Crna maska
Black frame





x = 9
Krem maska
Beige frame





x = K2
Mat bela maska
Mat white frame






x = E2
Mat crna maska
Mat black frame






x = 2
Grafitna maska
Graphite frame





x = S
Srebrna maska
Silver frame





x = S1
Antik silver maska
Antique silver frame






x = B1
Tobacco braon maska
Tobacco brown frame






x = G
Zlatna maska
Gold frame





x = G2
Brušeni nikl maska
Brushed nickel frame



70801.x
Maska 1M
FRAME EXP
Cover frame 1M
FRAME EXP




95,6 x 86mm



70802.x
Maska 2M
FRAME EXP
Cover frame 2M
FRAME EXP




95,6 x 86mm




70803.x
Maska 3M
FRAME EXP
Cover frame 3M
FRAME EXP




118 x 86mm

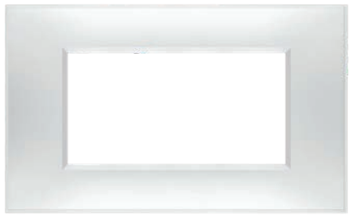

70804.x
Maska 4M
FRAME EXP
Cover frame 4M
FRAME EXP



140,4 x 86mm

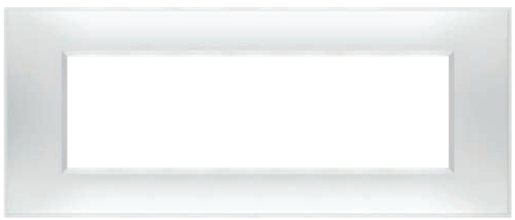

70807.x
Maska 7M
FRAME EXP
Cover frame 7M
FRAME EXP



207,6 x 86mm

experience

DEKORATIVNE MASKE
DECORATIVE FRAMES

Raznovrsnost programa Experience, pored brojnih funkcionalnih modula, ogleda se i u izuzetno velikoj ponudi dekorativnih maski.

Podeljene su u 3 osnovne grupe BASIC, COLOR i EXCLUSIVE, u zavisnosti od boja i materijala koji su korišćeni pri izradi.

Raznolikost boja i veliki broj kombinacija, program Experience čine savršenim dekorom na zidu kako klasičnih tako i modernih, ekstravagantnih enterijera.

Diversity of Experience, among numerous functional modules, reflects in very large offer of decorative masks.

Divided into three main groups BASIC, COLOR and EXCLUSIVE, depending on the colors and materials.

The variety of colors and a large number of combinations, makes Experience the perfect decor on the wall for traditional as well for the modern and extravagant interiors.

BASIC





BELA MASKA / BELI NOSAČ
WHITE FRAME / WHITE HOLDER



BELA MASKA / CRNI NOSAČ
WHITE FRAME / BLACK HOLDER



BELA MASKA / SILVER NOSAČ
WHITE FRAME / SILVER HOLDER





CRNA MASKA / CRNI NOSAČ
BLACK FRAME / BLACK HOLDER



CRNA MASKA / BELI NOSAČ
BLACK FRAME / WHITE HOLDER



CRNA MASKA / SILVER NOSAČ
BLACK FRAME / SILVER HOLDER





SILVER MASKA / SILVER NOSAČ
SILVER FRAME / SILVER HOLDER



SILVER MASKA / BELI NOSAČ
SILVER FRAME / WHITE HOLDER



SILVER MASKA / CRNI NOSAČ
SILVER FRAME / BLACK HOLDER

COLOR





VIVID MASKE
VIVID FRAMES





METALLIC MASKE
METALLIC FRAMES





SOFT TOUCH MASKE
SOFT TOUCH FRAMES

EXCLUSIVE





DRVENE MASKE
WOODEN FRAMES





STAKLENE MASKE
GLASS FRAMES





METALNE MASKE
METAL TOUCH FRAMES

eXperience




BASIC
BELA / WHITE

Ultimativna elegancija i prozračnost ogledaju se u geometriji oblika i odsjaju površina i kreiraju novu definiciju stila

Ultimative elegance and lightness are reflected in the geometry of shapes and glossy surface to create a new definition of style















experience

BASIC

BELA MASKA / BELI NOSAČ
WHITE FRAME / WHITE HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- *Installation onto the mounting frame by pressing*
- *For covering the assembly of modules;*




70101.00

Maska 1M EXP BASIC,
bela sa belim nosačem

Cover frame 1M EXP BASIC,
white with white holder



97,6 x 91,8 mm




70102.00

Maska 2M EXP BASIC,
bela sa belim nosačem

Cover frame 2M EXP BASIC,
white with white holder



97,6 x 91,8 mm



70123.00

Maska 2/3M EXP BASIC,
bela sa belim nosačem

Cover frame 2/3M EXP BASIC,
white with white holder



120 x 91,8 mm




70103.00

Maska 3M EXP BASIC,
bela sa belim nosačem

Cover frame 3M EXP BASIC,
white with white holder



120 x 91,8 mm

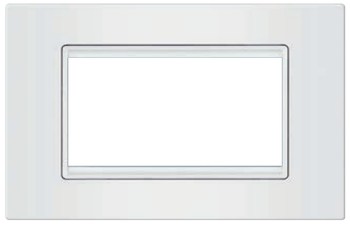

70104.00

Maska 4M EXP BASIC,
bela sa belim nosačem

Cover frame 4M EXP BASIC,
white with white holder




142,4 x 91,8 mm



70106.00

Maska 6M EXP BASIC,
bela sa belim nosačem

Cover frame 6M EXP BASIC,
white with white holder




187,2 x 91,8 mm




70107.00

Maska 7M EXP BASIC,
bela sa belim nosačem

Cover frame 7M EXP BASIC,
white with white holder




209,6 x 91,8 mm

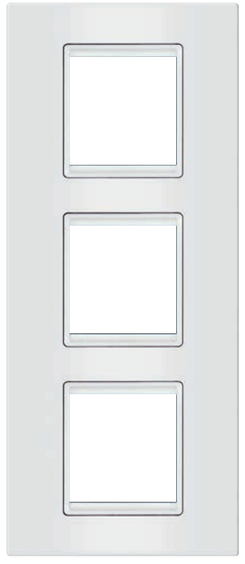


70162.00

Maska 3x2M EXP
BASIC, vertikalna,
bela sa belim nosačem

Cover frame 3x2M EXP
BASIC, vertical,
white with white holder




97,6 x 233,8 mm

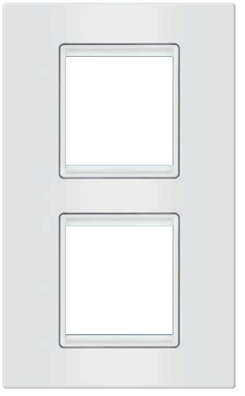


70142.00

Maska 2x2M EXP
BASIC, vertikalna,
bela sa belim nosačem

Cover frame 2x2M EXP
BASIC, vertical,
white with white holder




97,6 x 162,8 mm

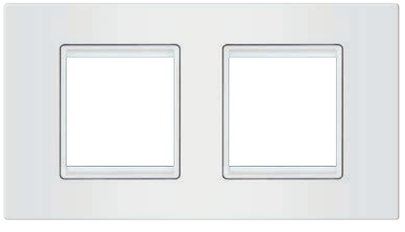


70122.00

Maska 2x2M EXP BASIC,
horizontalna, bela sa belim nosačem

Cover frame 2x2M EXP BASIC,
horizontal, white with white holder



168,6 x 91,8 mm

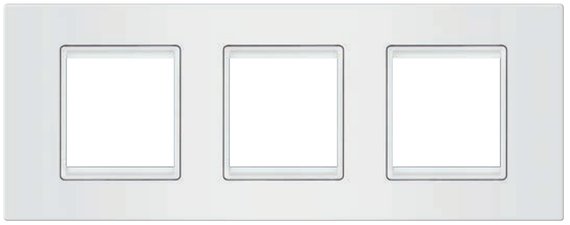


70132.00

Maska 3x2M EXP BASIC,
horizontalna, bela sa belim nosačem

Cover frame 3x2M EXP BASIC,
horizontal, white with white holder




239,6 x 91,8 mm

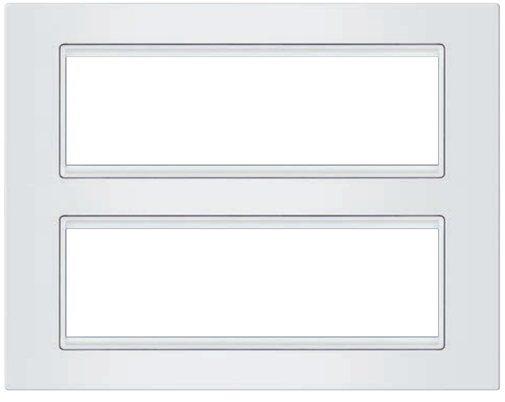

70127.00

Maska 2x7M EXP BASIC,
bela sa belim nosačem

Cover frame 2x7M EXP BASIC,
white with white holder



209,6 x 162,8 mm



experience

BASIC

BELA MASKA / CRNI NOSAČ
WHITE FRAME / BLACK HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- *Installation onto the mounting frame by pressing*
- *For covering the assembly of modules;*



70101.0E

Maska 1M EXP BASIC,
bela sa crnim nosačem

Cover frame 1M EXP BASIC,
white with black holder






70102.0E

Maska 2M EXP BASIC,
bela sa crnim nosačem

Cover frame 2M EXP BASIC,
white with black holder





70123.0E

Maska 2/3M EXP BASIC,
bela sa crnim nosačem

Cover frame 2/3M EXP BASIC,
white with black holder





70103.0E

Maska 3M EXP BASIC,
bela sa crnim nosačem

Cover frame 3M EXP BASIC,
white with black holder





70104.0E

Maska 4M EXP BASIC,
bela sa crnim nosačem

Cover frame 4M EXP BASIC,
white with black holder






70106.0E

Maska 6M EXP BASIC,
bela sa crnim nosačem

Cover frame 6M EXP BASIC,
white with black holder







70107.0E

Maska 7M EXP BASIC,
bela sa crnim nosačem

Cover frame 7M EXP BASIC,
white with black holder




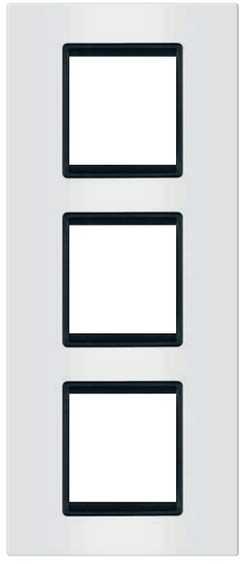


70162.0E

Maska 3x2M EXP
BASIC, vertikalna,
bela sa crnim nosačem

Cover frame 3x2M EXP
BASIC, vertical,
white with black holder




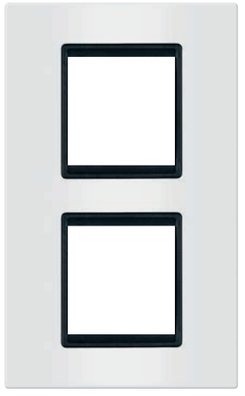

70142.0E

Maska 2x2M EXP
BASIC, vertikalna,
bela sa crnim nosačem

Cover frame 2x2M EXP
BASIC, vertical,
white with black holder






70122.0E

Maska 2x2M EXP BASIC,
horizontalna, bela sa crnim nosačem

Cover frame 2x2M EXP BASIC,
horizontal, white with black holder



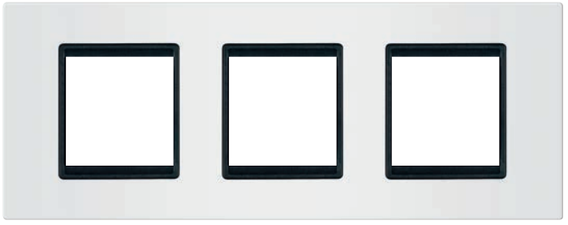


70132.0E

Maska 3x2M EXP BASIC,
horizontalna, bela sa crnim nosačem

Cover frame 3x2M EXP BASIC,
horizontal, white with black holder




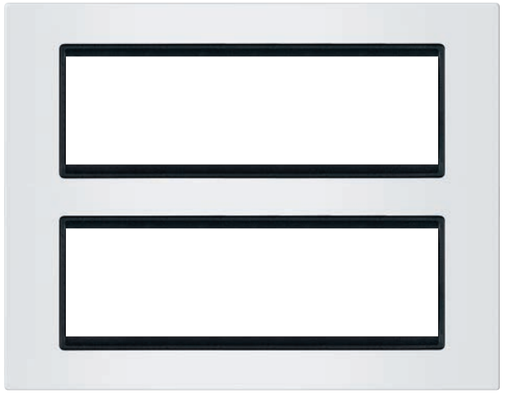

70127.0E

Maska 2x7M EXP BASIC,
bela sa crnim nosačem

Cover frame 2x7M EXP BASIC,
white with black holder






experience

BASIC

BELA MASKA / SILVER NOSAČ
WHITE FRAME / SILVER HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- *Installation onto the mounting frame by pressing*
- *For covering the assembly of modules;*



70101.0S

Maska 1M EXP BASIC,
bela sa silver nosačem

Cover frame 1M EXP BASIC,
white with silver holder



97,6 x 91,8 mm



70102.0S

Maska 2M EXP BASIC,
bela sa silver nosačem

Cover frame 2M EXP BASIC,
white with silver holder



97,6 x 91,8 mm



70123.0S

Maska 2/3M EXP BASIC,
bela sa silver nosačem

Cover frame 2/3M EXP BASIC,
white with silver holder



120 x 91,8 mm



70103.0S

Maska 3M EXP BASIC,
bela sa silver nosačem

Cover frame 3M EXP BASIC,
white with silver holder



120 x 91,8 mm



70104.0S

Maska 4M EXP BASIC,
bela sa silver nosačem

Cover frame 4M EXP BASIC,
white with silver holder




142,4 x 91,8 mm



70106.0S

Maska 6M EXP BASIC,
bela sa silver nosačem

Cover frame 6M EXP BASIC,
white with silver holder



187,2 x 91,8 mm




70107.0S

Maska 7M EXP BASIC,
bela sa silver nosačem

Cover frame 7M EXP BASIC,
white with silver holder




209,6 x 91,8 mm

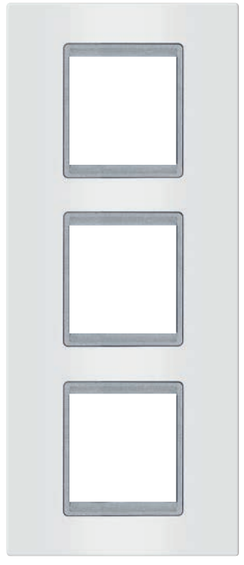


70162.0S

Maska 3x2M EXP
BASIC, vertikalna,
bela sa silver nosačem

Cover frame 3x2M EXP
BASIC, vertical,
white with silver holder




97,6 x 233,8 mm

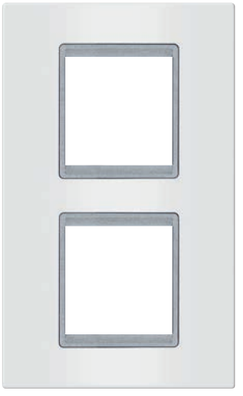


70142.0S

Maska 2x2M EXP
BASIC, vertikalna,
bela sa silver nosačem

Cover frame 2x2M EXP
BASIC, vertical,
white with silver holder



97,6 x 162,8 mm

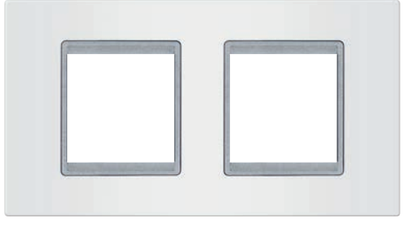


70122.0S

Maska 2x2M EXP BASIC,
horizontalna, bela sa silver nosačem

Cover frame 2x2M EXP BASIC,
horizontal, white with silver holder



168,6 x 91,8 mm

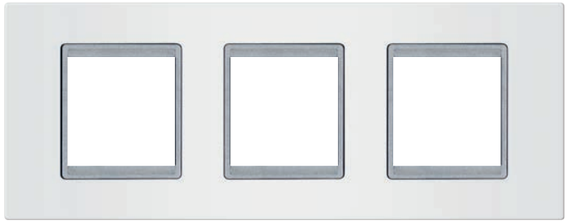


70132.0S

Maska 3x2M EXP BASIC,
horizontalna, bela sa silver nosačem

Cover frame 3x2M EXP BASIC,
horizontal, white with silver holder




239,6 x 91,8 mm

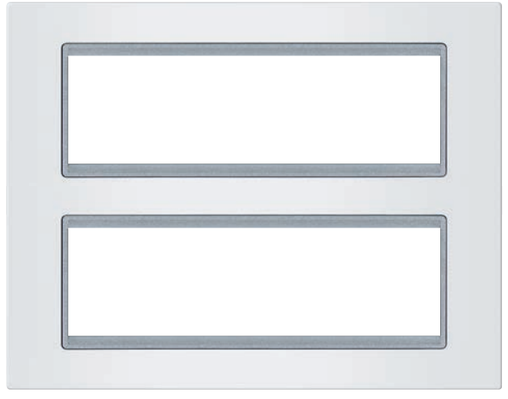

70127.0S

Maska 2x7M EXP BASIC,
bela sa silver nosačem

Cover frame 2x7M EXP BASIC,
white with silver holder



209,6 x 162,8 mm

eXperience

BASIC
CRNA / BLACK

Snaga crne boje ogleda se u smelim kombinacijama koje će Vašem prostoru dati dozu ekstravagancije

Power of black reflects in daring combinations that will give your space a dose of extravagance




















experience

BASIC

CRNA MASKA / CRNI NOSAČ
BLACK FRAME / BLACK HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- *Installation onto the mounting frame by pressing*
- *For covering the assembly of modules;*



70101.EE

Maska 1M EXP BASIC,
crna sa crnim nosačem

Cover frame 1M EXP BASIC,
black with black holder





70102.EE

Maska 2M EXP BASIC,
crna sa crnim nosačem

Cover frame 2M EXP BASIC,
black with black holder





70123.EE

Maska 2/3M EXP BASIC,
crna sa crnim nosačem

Cover frame 2/3M EXP BASIC,
black with black holder





70103.EE

Maska 3M EXP BASIC,
crna sa crnim nosačem

Cover frame 3M EXP BASIC,
black with black holder






70104.EE

Maska 4M EXP BASIC,
crna sa crnim nosačem

Cover frame 4M EXP BASIC,
black with black holder




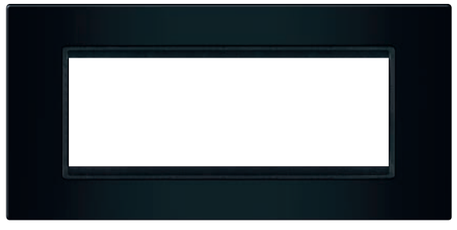


70106.EE

Maska 6M EXP BASIC,
crna sa crnim nosačem

Cover frame 6M EXP BASIC,
black with black holder



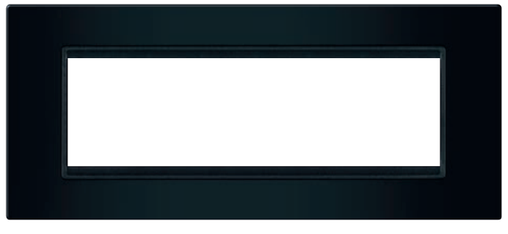

70107.EE

Maska 7M EXP BASIC,
crna sa crnim nosačem

Cover frame 7M EXP BASIC,
black with black holder






70162.EE

Maska 3x2M EXP
BASIC, vertikalna,
crna sa crnim nosačem

Cover frame 3x2M EXP
BASIC, vertical,
black with black holder






70142.EE

Maska 2x2M EXP
BASIC, vertikalna,
crna sa crnim nosačem

Cover frame 2x2M EXP
BASIC, vertical,
black with black holder



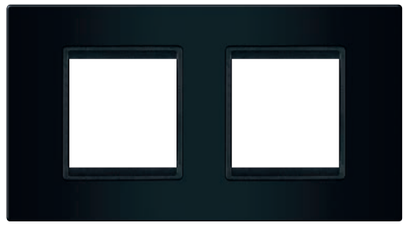

70122.EE

Maska 2x2M EXP BASIC,
horizontalna, crna sa crnim nosačem

Cover frame 2x2M EXP BASIC,
horizontal, black with black holder





70132.EE

Maska 3x2M EXP BASIC,
horizontalna, crna sa crnim nosačem

Cover frame 3x2M EXP BASIC,
horizontal, black with black holder






70127.EE

Maska 2x7M EXP BASIC,
crna sa crnim nosačem

Cover frame 2x7M EXP BASIC,
black with black holder






experience

BASIC

CRNA MASKA / BELI NOSAČ
BLACK FRAME / WHITE HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- *Installation onto the mounting frame by pressing*
- *For covering the assembly of modules;*




70101.E0

Maska 1M EXP BASIC,
crna sa belim nosačem

Cover frame 1M EXP BASIC,
black with white holder






70102.E0

Maska 2M EXP BASIC,
crna sa belim nosačem

Cover frame 2M EXP BASIC,
black with white holder






70123.E0

Maska 2/3M EXP BASIC,
crna sa belim nosačem

Cover frame 2/3M EXP BASIC,
black with white holder






70103.E0

Maska 3M EXP BASIC,
crna sa belim nosačem

Cover frame 3M EXP BASIC,
black with white holder



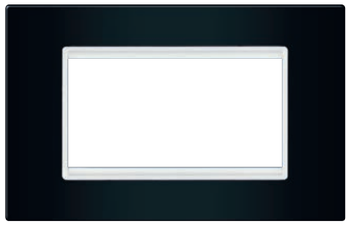


70104.E0

Maska 4M EXP BASIC,
crna sa belim nosačem

Cover frame 4M EXP BASIC,
black with white holder




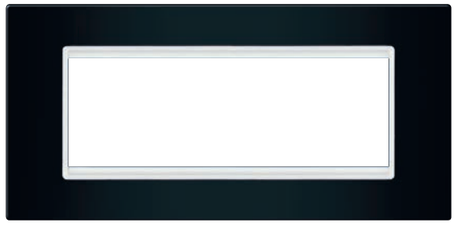


70106.E0

Maska 6M EXP BASIC,
crna sa belim nosačem

Cover frame 6M EXP BASIC,
black with white holder



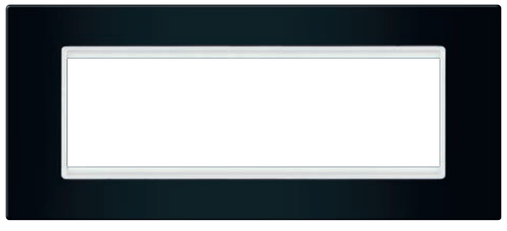


70107.E0

Maska 7M EXP BASIC,
crna sa belim nosačem

Cover frame 7M EXP BASIC,
black with white holder




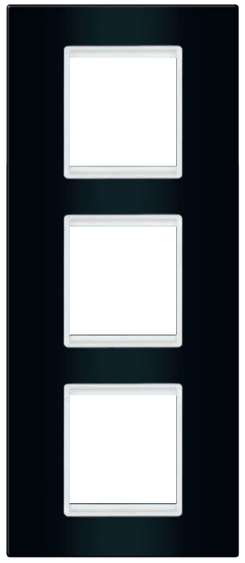


70162.E0

Maska 3x2M EXP
BASIC, vertikalna,
crna sa belim nosačem

Cover frame 3x2M EXP
BASIC, vertical,
black with white holder



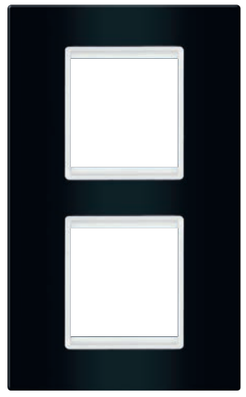


70142.E0

Maska 2x2M EXP
BASIC, vertikalna,
crna sa belim nosačem

Cover frame 2x2M EXP
BASIC, vertical,
black with white holder



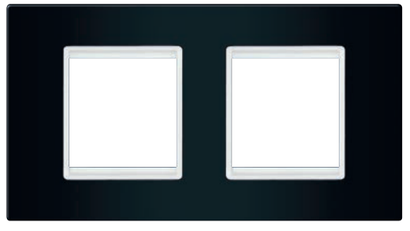


70122.E0

Maska 2x2M EXP BASIC,
horizontalna, crna sa belim nosačem

Cover frame 2x2M EXP BASIC,
horizontal, black with white holder



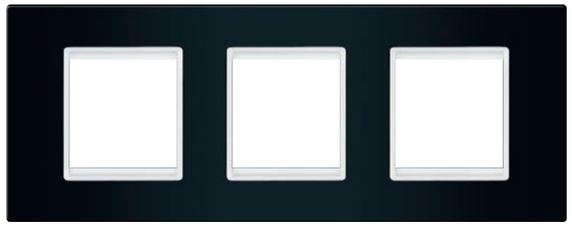

70132.E0

Maska 3x2M EXP BASIC,
horizontalna, crna sa belim nosačem

Cover frame 3x2M EXP BASIC,
horizontal, black with white holder






70127.E0

Maska 2x7M EXP BASIC,
crna sa belim nosačem

Cover frame 2x7M EXP BASIC,
black with white holder






experience

BASIC

CRNA MASKA / SILVER NOSAČ
BLACK FRAME / SILVER HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- *Installation onto the mounting frame by pressing*
- *For covering the assembly of modules;*




70101.ES

Maska 1M EXP BASIC,
crna sa silver nosačem

Cover frame 1M EXP BASIC,
black with silver holder






70102.ES

Maska 2M EXP BASIC,
crna sa silver nosačem

Cover frame 2M EXP BASIC,
black with silver holder






70123.ES

Maska 2/3M EXP BASIC,
crna sa silver nosačem

Cover frame 2/3M EXP BASIC,
black with silver holder






70103.ES

Maska 3M EXP BASIC,
crna sa silver nosačem

Cover frame 3M EXP BASIC,
black with silver holder



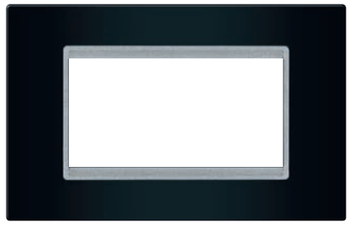

70104.ES

Maska 4M EXP BASIC,
crna sa silver nosačem

Cover frame 4M EXP BASIC,
black with silver holder






70106.ES

Maska 6M EXP BASIC,
crna sa silver nosačem

Cover frame 6M EXP BASIC,
black with silver holder






70107.ES

Maska 7M EXP BASIC,
crna sa silver nosačem

Cover frame 7M EXP BASIC,
black with silver holder




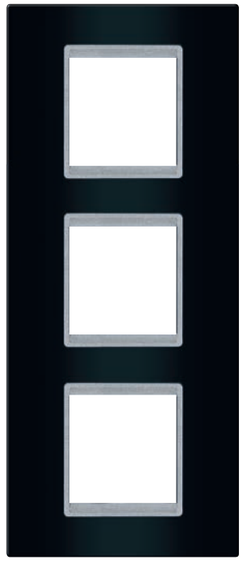

70162.ES

Maska 3x2M EXP
BASIC, vertikalna,
crna sa silver nosačem

Cover frame 3x2M EXP
BASIC, vertical,
black with silver holder






70142.ES

Maska 2x2M EXP
BASIC, vertikalna,
crna sa silver nosačem

Cover frame 2x2M EXP
BASIC, vertical,
black with silver holder



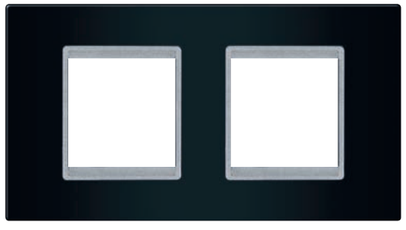


70122.ES

Maska 2x2M EXP BASIC,
horizontalna, crna sa silver nosačem

Cover frame 2x2M EXP BASIC,
horizontal, black with silver holder



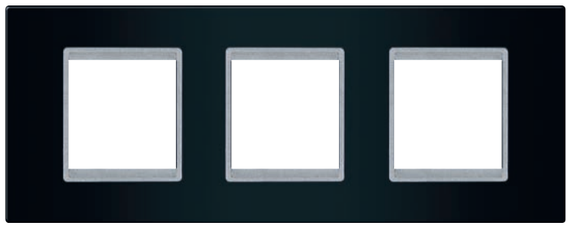

70132.ES

Maska 3x2M EXP BASIC,
horizontalna, crna sa silver nosačem

Cover frame 3x2M EXP BASIC,
horizontal, black with silver holder






70127.ES

Maska 2x7M EXP BASIC,
crna sa silver nosačem

Cover frame 2x7M EXP BASIC,
black with silver holder




eXperience

BASIC
SILVER / SILVER

Srebrna tekstura za moderne
enterijere i kao modni dodatak
na Vašem zidu

Silver texture for modern interiors
and as a fashion accessory
to your wall

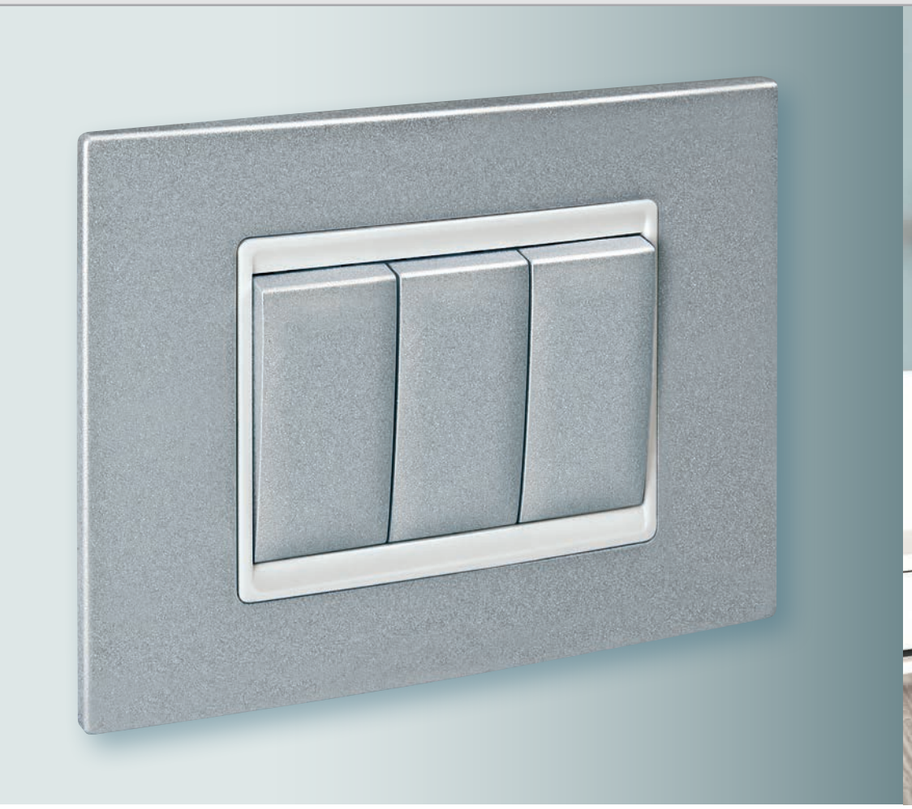































experience

BASIC

SILVER MASKA / SILVER NOSAČ
SILVER FRAME / SILVER HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- *Installation onto the mounting frame by pressing*
- *For covering the assembly of modules;*




70101.SS

Maska 1M EXP BASIC,
silver sa silver nosačem

Cover frame 1M EXP BASIC,
silver with silver holder






70102.SS

Maska 2M EXP BASIC,
silver sa silver nosačem

Cover frame 2M EXP BASIC,
silver with silver holder





70123.SS

Maska 2/3M EXP BASIC,
silver sa silver nosačem

Cover frame 2/3M EXP BASIC,
silver with silver holder





70103.SS

Maska 3M EXP BASIC,
silver sa silver nosačem

Cover frame 3M EXP BASIC,
silver with silver holder





70104.SS

Maska 4M EXP BASIC,
silver sa silver nosačem

Cover frame 4M EXP BASIC,
silver with silver holder






70106.SS

Maska 6M EXP BASIC,
silver sa silver nosačem

Cover frame 6M EXP BASIC,
silver with silver holder







70107.SS

Maska 7M EXP BASIC,
silver sa silver nosačem

Cover frame 7M EXP BASIC,
silver with silver holder




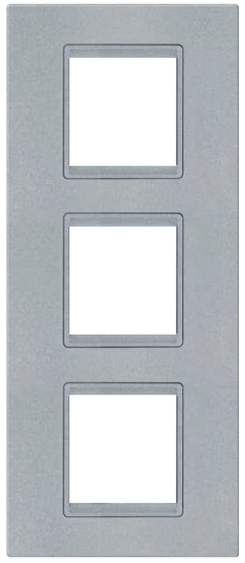


70162.SS

Maska 3x2M EXP
BASIC, vertikalna,
silver sa silver nosačem

Cover frame 3x2M EXP
BASIC, vertical,
silver with silver holder



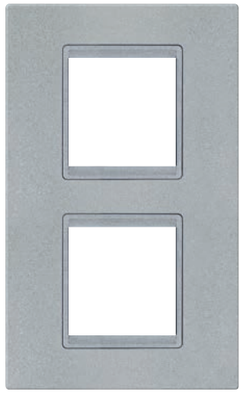


70142.SS

Maska 2x2M EXP
BASIC, vertikalna,
silver sa silver nosačem

Cover frame 2x2M EXP
BASIC, vertical,
silver with silver holder



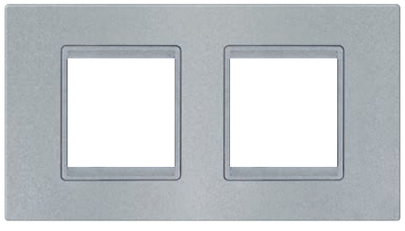


70122.SS

Maska 2x2M EXP BASIC,
horizontalna, silver sa silver nosačem

Cover frame 2x2M EXP BASIC,
horizontal, silver with silver holder



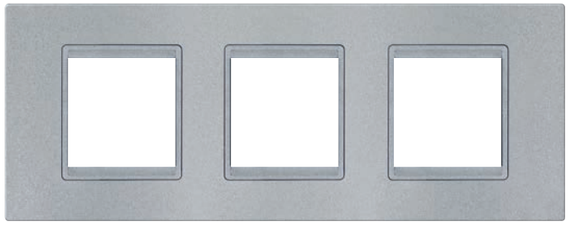


70132.SS

Maska 3x2M EXP BASIC,
horizontalna, silver sa silver nosačem

Cover frame 3x2M EXP BASIC,
horizontal, silver with silver holder




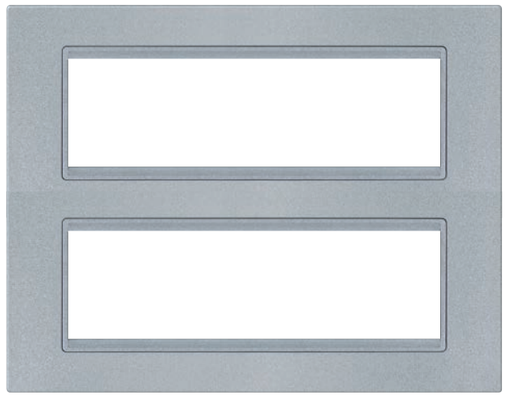

70127.SS

Maska 2x7M EXP BASIC,
silver sa silver nosačem

Cover frame 2x7M EXP BASIC,
silver with silver holder





experience

BASIC

SILVER MASKA / BELI NOSAČ
SILVER FRAME / WHITE HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- *Installation onto the mounting frame by pressing*
- *For covering the assembly of modules;*



70101.S0

Maska 1M EXP BASIC,
silver sa belim nosačem

Cover frame 1M EXP BASIC,
silver with white holder





70102.S0

Maska 2M EXP BASIC,
silver sa belim nosačem

Cover frame 2M EXP BASIC,
silver with white holder





70123.S0

Maska 2/3M EXP BASIC,
silver sa belim nosačem

Cover frame 2/3M EXP BASIC,
silver with white holder






70103.S0

Maska 3M EXP BASIC,
silver sa belim nosačem

Cover frame 3M EXP BASIC,
silver with white holder



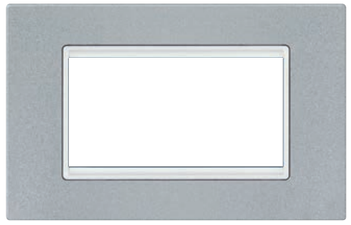

70104.S0

Maska 4M EXP BASIC,
silver sa belim nosačem

Cover frame 4M EXP BASIC,
silver with white holder






70106.S0

Maska 6M EXP BASIC,
silver sa belim nosačem

Cover frame 6M EXP BASIC,
silver with white holder






70107.S0

Maska 7M EXP BASIC,
silver sa belim nosačem

Cover frame 7M EXP BASIC,
silver with white holder







70162.S0

Maska 3x2M EXP
BASIC, vertikalna,
silver sa belim nosačem

Cover frame 3x2M EXP
BASIC, vertical,
silver with white holder




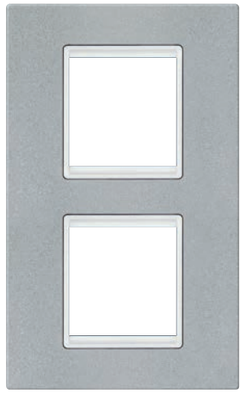

70142.S0

Maska 2x2M EXP
BASIC, vertikalna,
silver sa belim nosačem

Cover frame 2x2M EXP
BASIC, vertical,
silver with white holder






70122.S0

Maska 2x2M EXP BASIC,
horizontalna, silver sa belim nosačem

Cover frame 2x2M EXP BASIC,
horizontal, silver with white holder



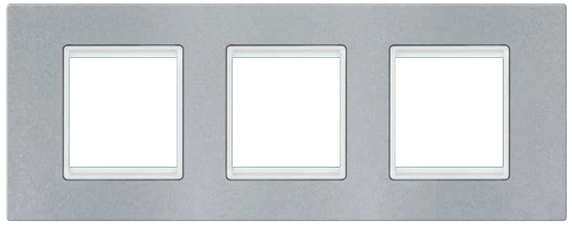


70132.S0

Maska 3x2M EXP BASIC,
horizontalna, silver sa belim nosačem

Cover frame 3x2M EXP BASIC,
horizontal, silver with white holder




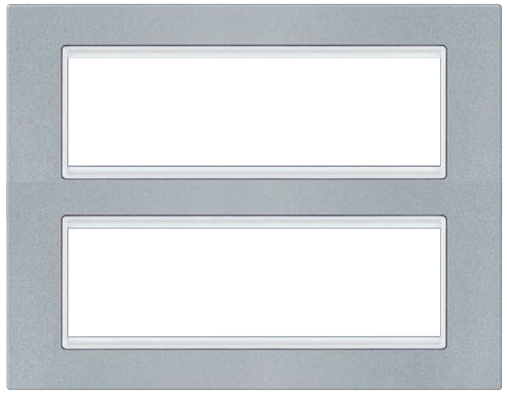

70127.S0

Maska 2x7M EXP BASIC,
silver sa belim nosačem

Cover frame 2x7M EXP BASIC,
silver with white holder





experience

BASIC

SILVER MASKA / CRNI NOSAČ
SILVER FRAME / BLACK HOLDER

- Ugradnja na noseću prirubnicu utiskivanjem
- Za pokrivanje sklopova modula;
- *Installation onto the mounting frame by pressing*
- *For covering the assembly of modules;*




70101.SE

Maska 1M EXP BASIC,
silver sa crnim nosačem

Cover frame 1M EXP BASIC,
silver with black holder






70102.SE

Maska 2M EXP BASIC,
silver sa crnim nosačem

Cover frame 2M EXP BASIC,
silver with black holder





70123.SE

Maska 2/3M EXP BASIC,
silver sa crnim nosačem

Cover frame 2/3M EXP BASIC,
silver with black holder





70103.SE

Maska 3M EXP BASIC,
silver sa crnim nosačem

Cover frame 3M EXP BASIC,
silver with black holder





70104.SE

Maska 4M EXP BASIC,
silver sa crnim nosačem

Cover frame 4M EXP BASIC,
silver with black holder






70106.SE

Maska 6M EXP BASIC,
silver sa crnim nosačem

Cover frame 6M EXP BASIC,
silver with black holder





70107.SE

Maska 7M EXP BASIC,
silver sa crnim nosačem

Cover frame 7M EXP BASIC,
silver with black holder






70162.SE

Maska 3x2M EXP
BASIC, vertikalna,
silver sa crnim nosačem

Cover frame 3x2M EXP
BASIC, vertical,
silver with black holder







70142.SE

Maska 2x2M EXP
BASIC, vertikalna,
silver sa crnim nosačem

Cover frame 2x2M EXP
BASIC, vertical,
silver with black holder



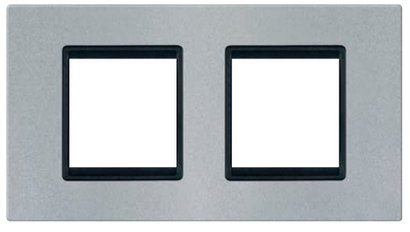


70122.SE

Maska 2x2M EXP BASIC,
horizontalna, silver sa crnim nosačem

Cover frame 2x2M EXP BASIC,
horizontal, silver with black holder



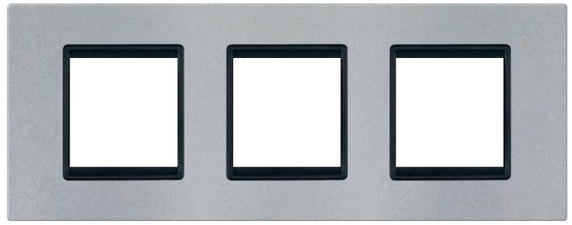


70132.SE

Maska 3x2M EXP BASIC,
horizontalna, silver sa crnim nosačem

Cover frame 3x2M EXP BASIC,
horizontal, silver with black holder




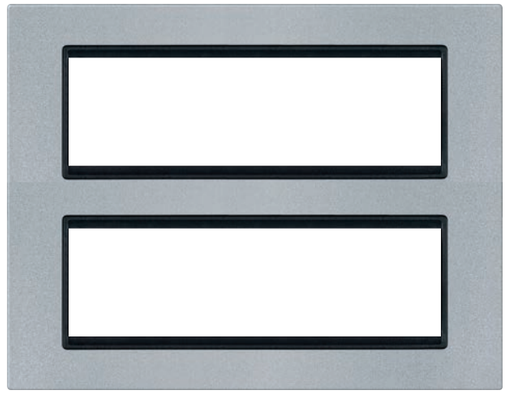

70127.SE

Maska 2x7M EXP BASIC,
silver sa crnim nosačem

Cover frame 2x7M EXP BASIC,
silver with black holder






experience

COLOR VIVID


Razigrani kolorit u jasnim formama pruža veliki broj kombinacija boja


Playfull coloring in clear forms provides a variety of combinations of design










































x = 2
Grafit
Graphite




x = 5
Pastel plava
Pastel blue




x = N
Pastel narandžasta
Pastel orange



x = 9
Krem
Beige




x = 7
Pastel zelena
Pastel green



x = V
Lavanda
Lavander



x = 99
Krem/Krem
Beige/Beige



x = 4
Crvena
Red



1M
70201.x




2M
70202.x




2/3M
70223.x



3M
70203.x



2x2M
70242.x




3x2M
70262.x



2x2M
70222.x



3x2M
70232.x




4M
70204.x



6M
70206.x



7M
70207.x



2x7M
70227.x





experience


COLOR METALLIC


Metalik efekat daje vašem zidu dozu luksuza

Mettalic effect gives your wall a dose of luxury

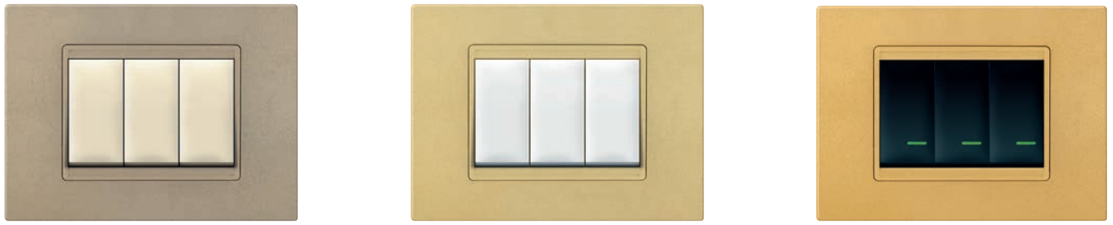





































x = G2
Brušeni nikl
Brushed nickel




x = S1
Antik silver
Antique silver




x = P
Plava metalik
Blue metalic




x = G1
Zlatna sjaj
Shiny gold



x = U
Aluminijum
Aluminium



x = Z
Zelena metalik
Green metalic



x = G
Zlatna
Gold



x = B1
Tobacco braon
Tobacco brown



1M
70301.x




2M
70302.x



2/3M
70323.x




3M
70303.x




2x2M
70342.x



3x2M
70362.x



2x2M
70322.x



3x2M
70332.x




4M
70304.x



6M
70306.x



7M
70307.x



2x7M
70327.x






experience


COLOR
SOFT TOUCH


Kada se svetlo ugasi soft touch sky blue uvodi vas u novi svet dekorativnih maski


When the light is off, sky blue soft touch brings you into the new world of decorative frames











x = K1

Sky blue

Sky blue











x = E1

Crna soft

Soft black

LEPOTA SKRIVENA U DODIRU

Nova linija maski programa Experience budi u korisniku još jedno čulo: čulo dodira.

Mekana, nežna površina - specifičnost koja naglašava sofisticirani izgled.

Maske soft touch proizvode se u dve osnovne boje: crnoj i beloj (sky blue).

Novina se ogleda u beloj masci koja samo u mraku svetli plavičastim svetlom, pa otuda i naziv sky blue.

BEAUTY HIDDEN IN TOUCH

New line of frames arouses in user a new feeling: a sense of touch.

Soft, tender surface - a distinctive feature that highlights a sophisticated look.

Soft touch frames are produced in two basic colors: black and white (sky blue).

Originality is reflected in the white frame that glows in the dark by bluish light, hence the name is sky blue.



1M
70401.x




2M
70402.x



2/3M
70423.x



3M
70403.x




4M
70404.x



6M
70406.x



7M
70407.x



2x7M
70427.x






experience

EXCLUSIVE WOOD

Četiri elegantne vrste za
tradicionalne prostore i korisnike
koji uživaju u toplini punog drveta


Four elegant woods
for traditional spaces and users
that enjoys the warmth of solid wood











x = J
Javor
Maple











x = Y
Trešnja
Cherry












x = W
Wenge
Wenge











x = R
Orah
Nut

DOZA RUSTIČNOSTI U VAŠEM DOMU

Dekorativne maske od punog drveta daju prostoru zemljani, prirodan izgled.

Ono što ih čini jedinstvenim
su karakteristike i šare samog drveta
od kojeg su izrađene.

A DOSE OF RUSTICITY AT YOUR HOME

Decorative cover masks made of solid wood are bringing the living area earthy, natural look.


What make them unique are characteristics and patterns of the wood they are made of.



2M
70502.x



3M
70503.x



4M
70504.x



7M
70507.x






experience


EXCLUSIVE GLASS


Osvojiće svaki prostor koji prati najnovije trendove u dizajnu enterijera

Fulfill every space that follows the latest trends in interior design









x = 00

Kristal bela sa belim nosačem


Chystal white with white holder




x = 0


Kristal bela

Chystal white













x = E


Kristal crna

Crystal black












x = S


Ice silver

Ice silver











x = 7

Koral

Coral

ČISTO I SENZUALNO... EKSTRAVAGANTNO I SJAJNO...

Staklo je jedan od osnovnih materijala u našim životnim prostorima već nekoliko vekova i sve do današnjih dana sve više pronalazi svoje mesto u dizajnu enterijera.

PURE AND SENSUAL... EXTRAVAGANT AND SHINY...


Glass is one of the basic materials i n our living spaces for several centuries and until today more and more finds its place in interior design.



2M
70602.x



3M
70603.x



4M
70604.x



7M
70607.x





experience

EXCLUSIVE METAL

Moć livenog metala pretočena
u eleganciju za jedinstvene prostore

Distinctive materials
for unique spaces












x = Q
Titanijum
Titanium












x = U
Aluminijum
Aluminum











x = A1
Antracit kristal
Anthracite crystal











x = C1
Bakar patina
Copper patina

IZVANREDAN... JASAN... TRAJAN... PLEMENIT... METAL

Exclusive linija programa Experience obogaćena je još jednim prirodnim materijalom – metalom.

Metal kao materijal budi u korisniku osećaj trajnosti i robusnosti.

Metal kao detalj na zidu oslikava karakter vlasnika i zasigurno budi pažnju posmatrača.

U kombinaciji sa jasnim geometrijskim linijama i grubim površinama dekorativne maske od metala lako su uklopive u rustične, ali i u ultra moderne domove.

OUTSTANDING... CLEAR... DURABLE... NOBLE... METAL

Exclusive line in Experience is enriched with another natural material - metal.

Metal as a material arouse in user a sense of durability and robustness.

Metal as a detail on the wall reflects the character of owners and certainly awakes the attention of viewer.


In combination with clear geometric lines and rough surfaces metal covering masks are easy fitting in rustic and in ultra modern homes.




2M
70702.x



3M
70703.x



4M
70704.x



7M
70707.x





eXperience

UGRADNJA
INSTALLATION

- Montažne kutije Ø60
- *Installation boxes Ø60*

- Montažne kutije za modularni program
- *Installation boxes for modular program*

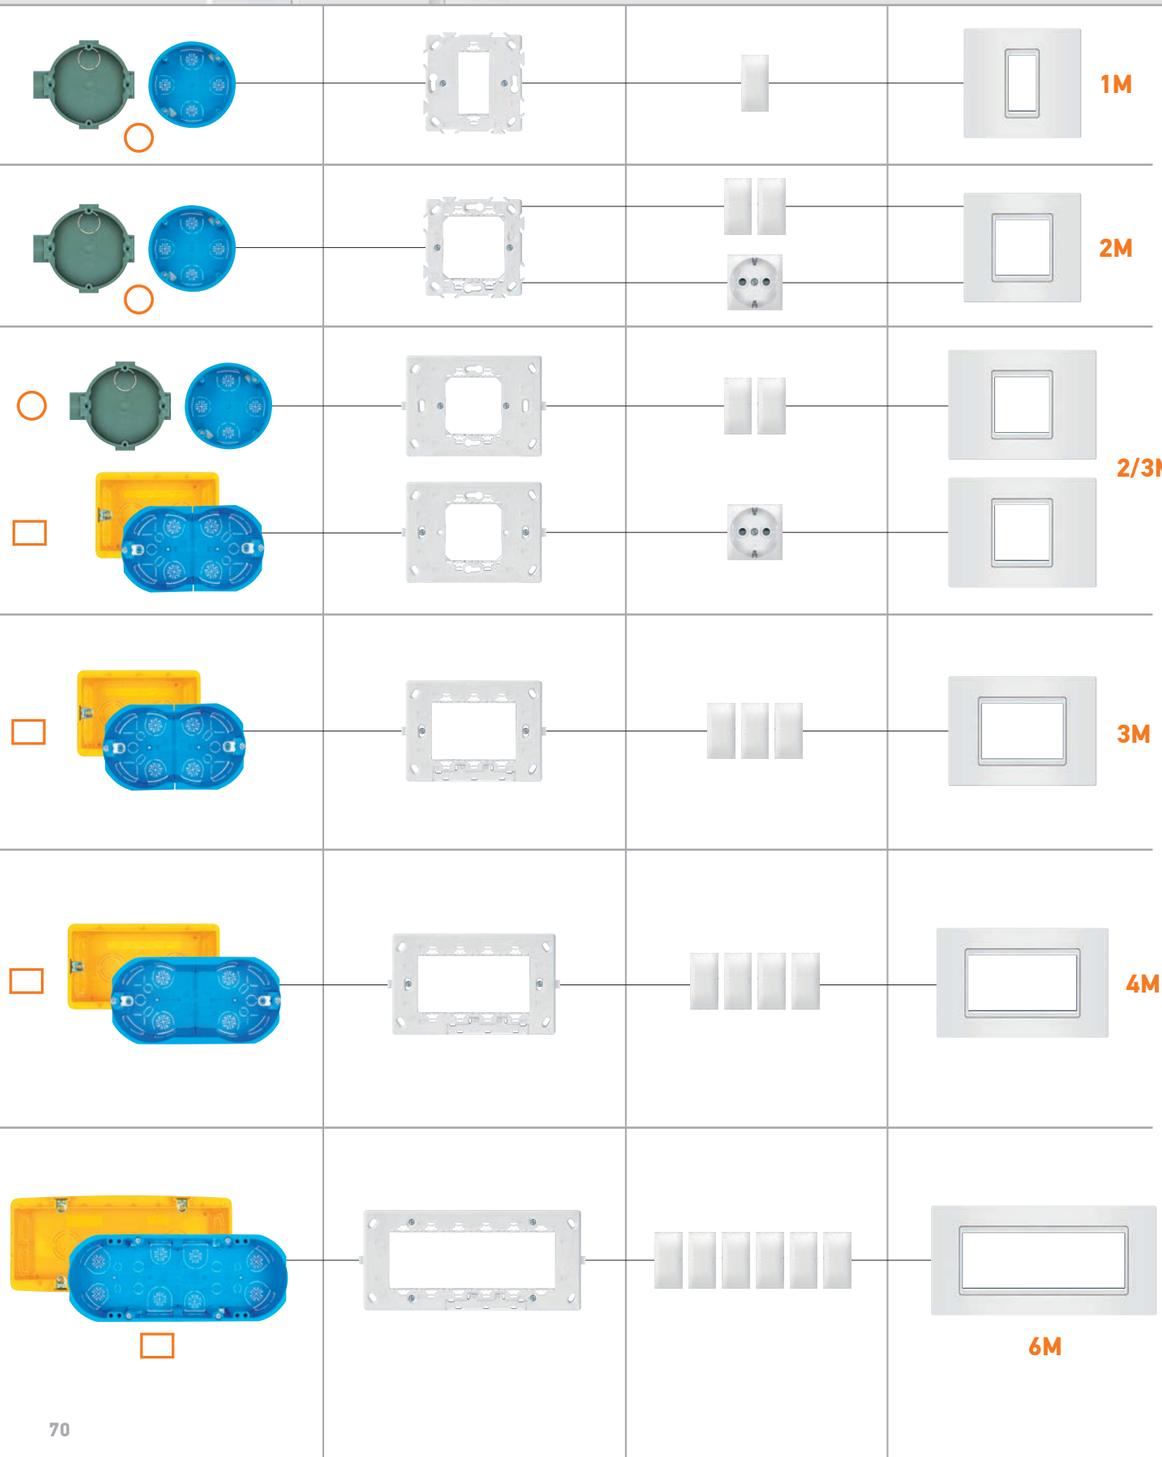

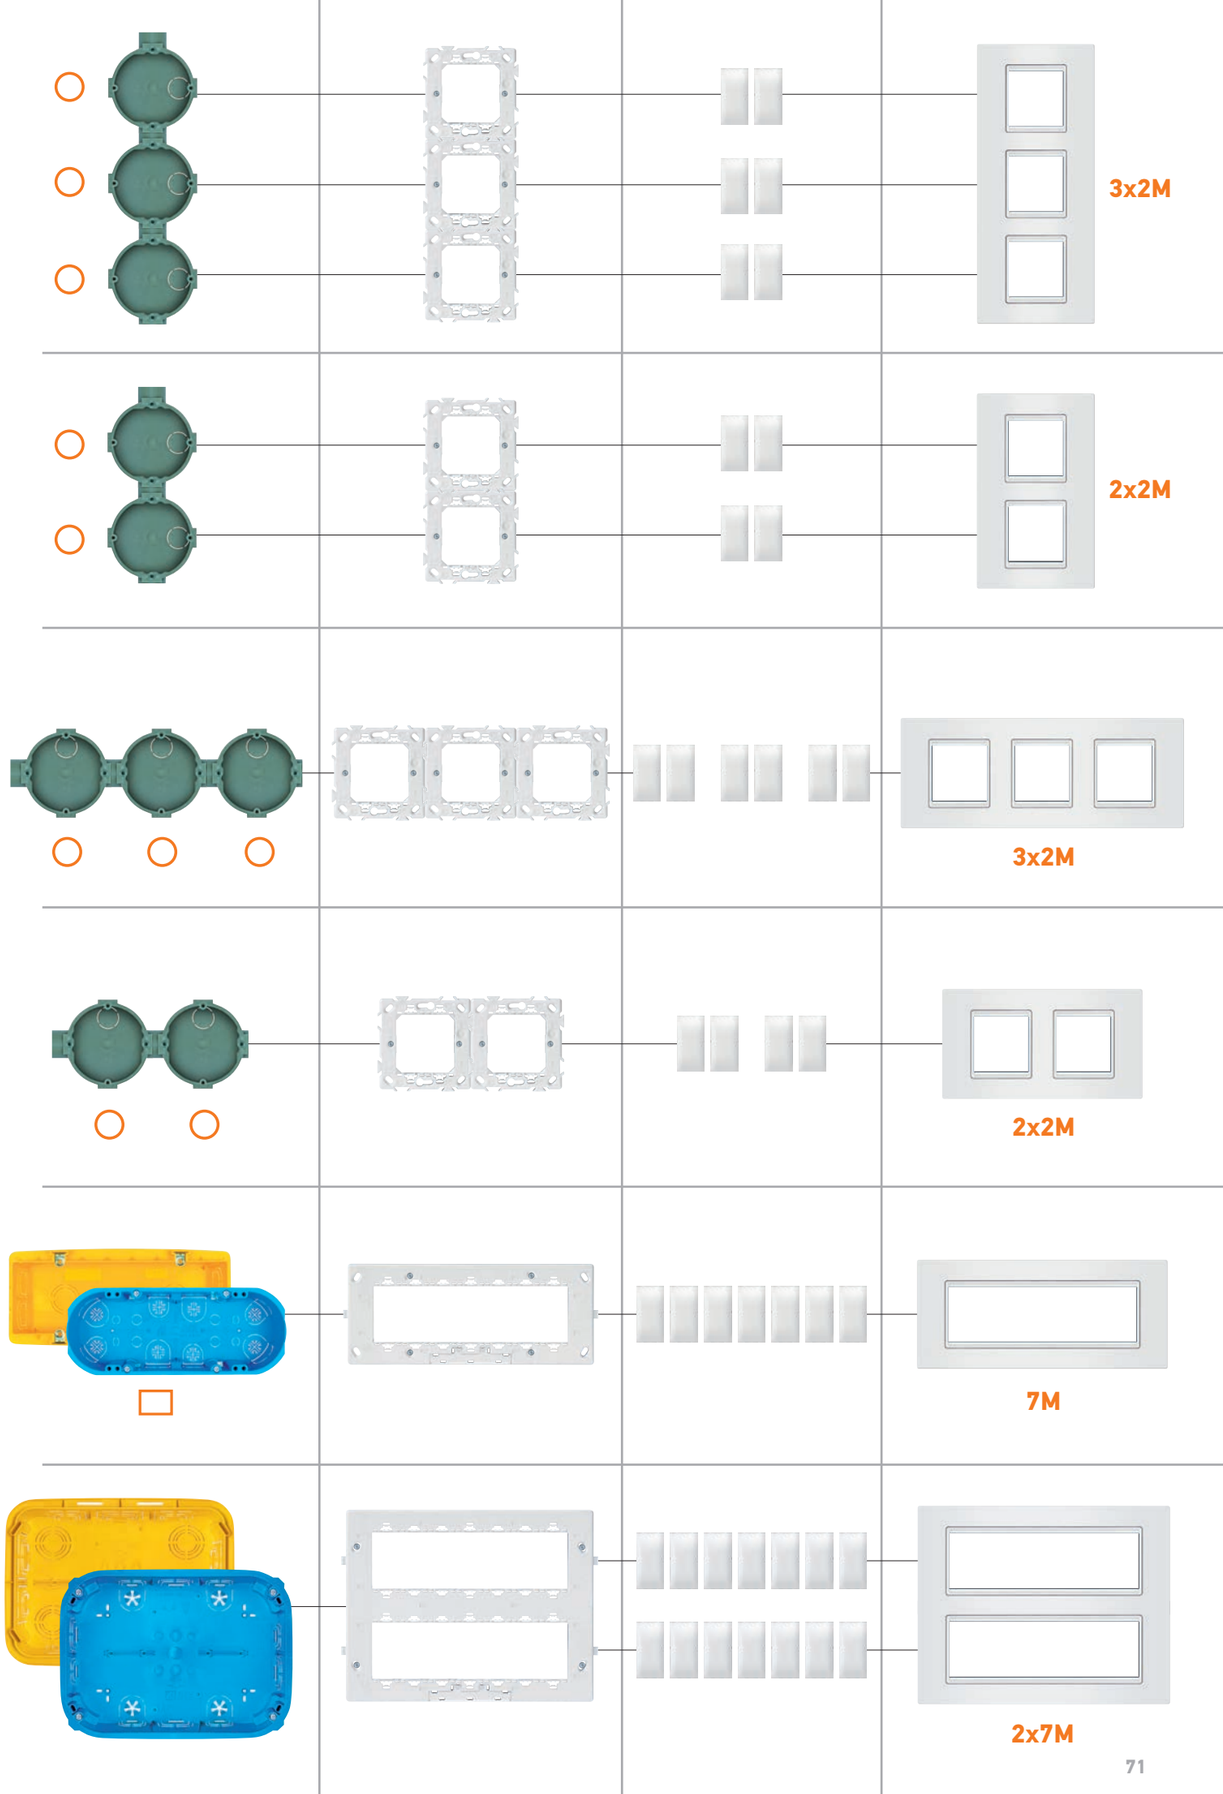



eXperience

PRIRUBNICE
MOUNTING FRAMES



71001

Prirubnica
1M EXP
za šuplji zid

Mounting frame 1M EXP for hollow wall

- Za ugradnju jednog modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka
- *For one module installation;*
- *Installation into the mounting box Ø60 by screws*




71101

Prirubnica
1M EXP
sa stegačima

Mounting frame 1M EXP with claws

- Za ugradnju jednog modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača
- *For one module installation;*
- *Installation into the mounting box Ø60 by clamps*




71002

Prirubnica
2M EXP
za šuplji zid

Mounting frame 2M EXP for hollow wall

- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka
- *For two module installation;*
- *Installation into the mounting box Ø60 by screws*




71102

Prirubnica
2M EXP
sa stegačima

Mounting frame 2M EXP with claws

- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača
- *For two module installation;*
- *Installation into the mounting box Ø60 by clamps*




71022

Prirubnica sa metalnim umetkom 2M EXP
za šuplji zid

Mounting frame with metal insert 2M EXP for hollow wall

- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću vijaka
- *For two module installation;*
- *Installation into the mounting box Ø60 by screws*




71122

Prirubnica sa metalnim umetkom 2M EXP
sa stegačima

Mounting frame with metal insert 2M EXP with claws

- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača
- *For two module installation;*
- *Installation into the mounting box Ø60 by clamps*



71023

Prirubnica
2/3M EXP
sa vijcima

Mounting frame 2/3M EXP with screws


- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju 3M pomoću vijaka
- *For two module installation;*
- *Installation into the mounting box 3M by screws*

71123

Prirubnica
2/3M EXP
sa stegačima

Mounting frame 2/3M EXP with claws

- Za ugradnju dva modula;
- Ugradnja u montažnu kutiju Ø60 pomoću stegača
- *For two module installation;*
- *Installation into the mounting box Ø60 by clamps*




71003

Prirubnica
3M EXP
sa vijcima

Mounting frame 3M EXP with screws

- Za ugradnju tri modula;
- Ugradnja u montažnu kutiju 3M pomoću vijaka
- *For three module installation;*
- *Installation into the mounting box 3M by screws*

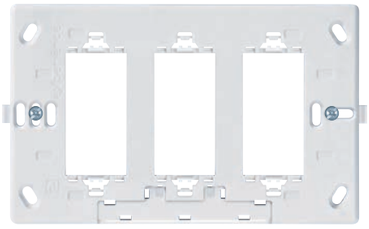

71131

Prirubnica 3x1M EXP
za univerzalni kupatilski indikator,
sa vijcima

Mounting frame 3x1M EXP for universal bathroom set, with screws

- Za ugradnju tri modula;
- Ugradnja u montažnu kutiju 4M pomoću vijaka
- *For three module installation;*
- *Installation into the mounting box 4M by screws*



71004

Prirubnica
4M EXP
sa vijcima

Mounting frame 4M EXP with screws

- Za ugradnju četiri modula;
- Ugradnja u montažnu kutiju 4M pomoću vijaka
- *For four module installation;*
- *Installation into the mounting box 4M by screws*



71006

Prirubnica
6M EXP
sa vijcima

Mounting frame 6M EXP with screws

- Za ugradnju šest modula;
- Ugradnja u montažnu kutiju 7M pomoću vijaka
- *For six module installation;*
- *Installation into the mounting box 7M by screws*




71007

Prirubnica
7M EXP
sa vijcima

Mounting frame 7M EXP with screws

- Za ugradnju sedam modula;
- Ugradnja u montažnu kutiju 7M pomoću vijaka
- *For seven module installation;*
- *Installation into the mounting box 7M by screws*

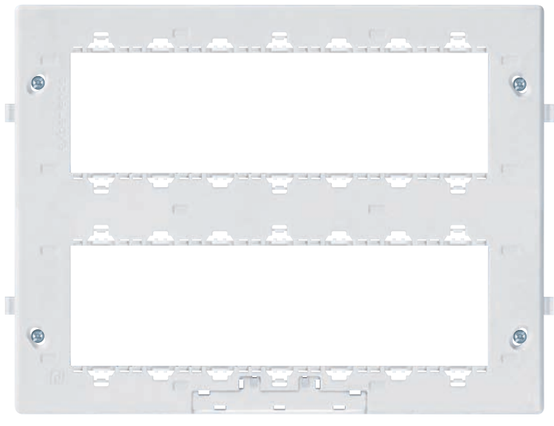


71027

Prirubnica
2x7M EXP
sa vijcima

Mounting frame 2x7M EXP with screws

- Za ugradnju 2 x sedam modula;
- Ugradnja u montažnu kutiju 2x7M pomoću vijaka
- *For 2 x seven module installation;*
- *Installation into the mounting box by screws*

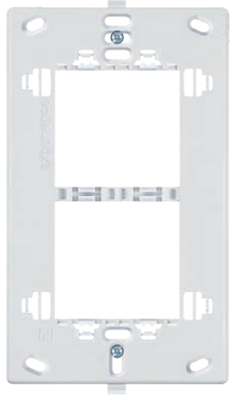

71144


Prirubnica 2x2M EXP za univerzalni kupatilski indikator,
sa vijcima

Mounting frame 2x2M EXP for universal bathroom set, with screws

- Za ugradnju 2 x dva modula;
- Ugradnja u montažnu kutiju 4M pomoću vijaka
- *For 2 x two module installation;*
- *Installation into the mounting box 4M by screws*



PRIRUBNICE SA LED OSVETLJENJEM
MOUNTING FRAMES WITH LED LIGHTNING




71303.5

Prirubnica
3M EXP sa vijcima
i LED osvetljenjem
plavo svetlo,

Mounting frame 3M EXP with screws and LED lightning, blue light

- Za ugradnju tri modula;
- Ugradnja u montažnu kutiju pomoću vijaka

- *For three module installation;*
- *Installation into the mounting box by screws*

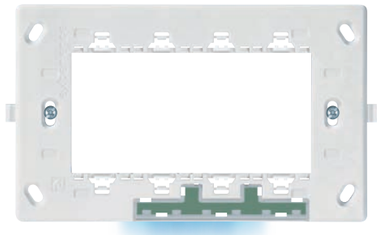


71304.5

Prirubnica
4M EXP sa vijcima
i LED osvetljenjem
plavo svetlo,

Mounting frame 4M EXP with screws and LED lightning, blue light

- Za ugradnju četiri modula;
- Ugradnja u montažnu kutiju pomoću vijaka

- *For four module installation;*
- *Installation into the mounting box by screws*

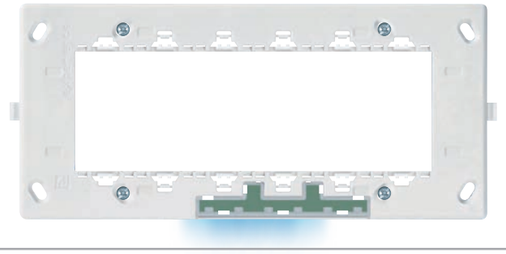


71306.5

Prirubnica
6M EXP sa vijcima
i LED osvetljenjem
plavo svetlo,

Mounting frame 6M EXP with screws and LED lightning, blue light

- Za ugradnju šest modula;
- Ugradnja u montažnu kutiju pomoću vijaka

- *For six module installation;*
- *Installation into the mounting box by screws*

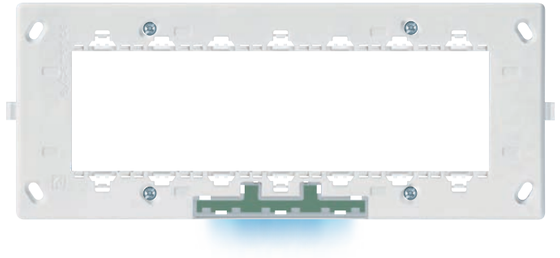

71307.5

Prirubnica
7M EXP sa vijcima
i LED osvetljenjem
plavo svetlo,

Mounting frame 7M EXP with screws and LED lightning, blue light

- Za ugradnju sedam modula;
- Ugradnja u montažnu kutiju pomoću vijaka

- *For seven module installation;*
- *Installation into the mounting box by screws*



71202

Set vijaka M3,5 x 20
pakovanje 100 kom

Screw set M3,5 x 20 pack. 100 pcs.



71203

Set vijaka M3,5 x 35
pakovanje 50 kom

Screw set M3,5 x 35 pack. 50 pcs.



71205

Set vijaka M3,5 x 50
pakovanje 50 kom

Screw set M3,5 x 50 pack. 50 pcs.

MONTAŽNI PRIBOR
INSTALLATION ACCESSORIES





65232.0

Poklopac za
kutiju 3M, beli

Ornamental cover for 3M, white

65242.0

Poklopac za
kutiju 4M, beli

Ornamental cover for 4M, white

65272.0

Poklopac za
kutiju 7M, beli

Ornamental cover for 7M, white


65277.0

Poklopac za
kutiju 2x7M, beli

Ornamental cover for 2x7M, white

- Poklopac za zatvaranje montažne kutije kada se koristi kao razvodna ili za izjednačenje potencijala;
- Ugradnja na montažnu kutiju vijcima

- *Cover for mounting box when is used as junction box or equipotentialing;*
- *Installation onto the mounting box by screws*

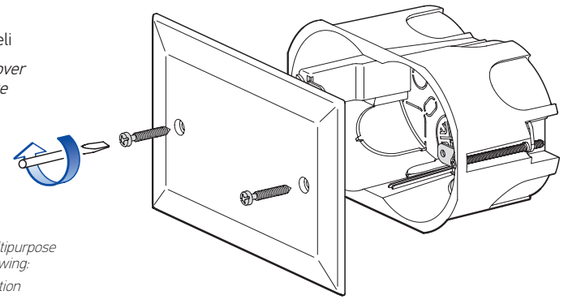

- Montaža kutije za 3, 4 i 7 modula poseduje i posebne ukrasne poklopce koji se na kutiju pričvršćuju viljcima. Poklopci imaju višestruku namenu i obezbeđuju sledeće:

  - Mogućnost korišćenja montažnih kutija, kao razvodne instalacione kutije.

  - Mogućnost da se izvede dodatna instalacija koja će se naknadno povezati i koristiti,

  - Mogućnost upotrebe montažnih kutija kao kutija za izjednačenje potencijala uz primenu odgovarajućih rednih stezaljki.

- *The installation boxes for 3, 4 or 7 modules have the special ornamental covers to be fixed to the box by screws. The covers are intended for multipurpose application and provide the following:*

  - Possibility of using the installation boxes as the junction boxes.

  - Possibility of conneting and using the additional installations.

  - Possibility of usinf the installation boxes as potential equalizing boxes by applying, the appropriate block terminals.

*** Halogen free**



65231.0

Zaštitni poklopac
za kutiju PM3

Protecting cover for PM3 installation box

65241.0

Zaštitni poklopac
za kutiju PM4

Protecting cover for PM4 installation box


65271.0

Zaštitni poklopac
za kutiju PM7

Protecting cover for PM7 installation box

- Poklopac za zaštitu kutije i provodnika prilikom malterisanja;
- Snabdeven signalnim pipcima radi lakšeg pronalaženja nakon malterisanja;
- Ugradnja na montažnu kutiju utiskivanjem

- *Protective cover for mounting box and conducting wires during plastering;*
- *With signal extensions for easier finding after plastering;*
- *Installation onto the mounting box by pressing*

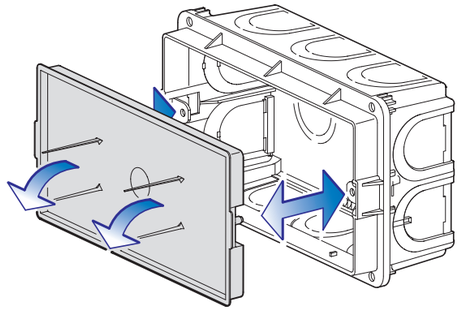

- Kod ugradnje montažnih kutija u pune zidove unutrašnjost kutije se zaštićuje zaštitnim poklopcem koji prilikom malterisanja zidova obezbeđuje nesmetani rad.
- Nakon sušenja maltera poklopac se jednostavno izvadi zajedno sa delom maltera koji je preko njega.
- Unutrašnjost kutije i provodnici ostaju čisti.

- *When installing, the installation boxes into the solid wals, the internal parts of the box are to be protected by the protecting cover which provides the trouble-free wall plastering.*
- *After drying, the cover can be simply taken out together with a part of plaster over it.*
- *The internal part of the box and the counducting wires remain clean.*


*** Halogen free**



experience

NADGRADNE KUTIJE ZA NA ZID
WALL MOUNTED BOXES

	Bela *White*	**x = 0**
	Siva *Grey*	**x = 1**
	Crna *Black*	**x = E**



71402.x

Kutija nadgradna 2M za na zid

Wall mounted box 2M

- Za ugradnju dva modula;
- Ugradnja na zid pomoću vijaka
- *For two module installation;*
- *Wall mounting with screws*



71012.0

Adapter za din šinu 35 mm EXP 2M

Adapter for din rail 35 mm EXP 2M




71404.x

Kutija nadgradna 4M za na zid

Wall mounted box 4M

- Za ugradnju četiri modula;
- Ugradnja na zid pomoću vijaka
- *For four module installation;*
- *Wall mounting with screws*

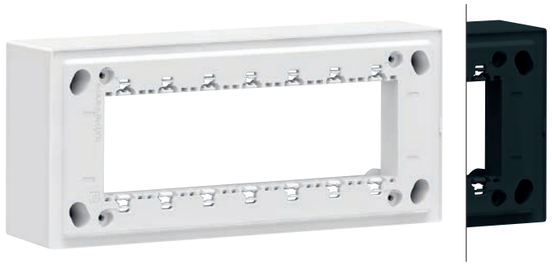

71407.x

Kutija nadgradna 7M za na zid

Wall mounted box 7M

- Za ugradnju sedam modula;
- Ugradnja na zid pomoću vijaka
- *For seven module installation;*
- *Wall mounting with screws*




71414.x

Kutija nadgradna ugaona 4M

Wall mounted angle box 4M

- Kutija za ugradnju četvorostruke prirubnice;
- Ugradnja na zid pomoću vijaka
- *Mounting box for four gang mounting frame;*
- *Wall mounting with screws*

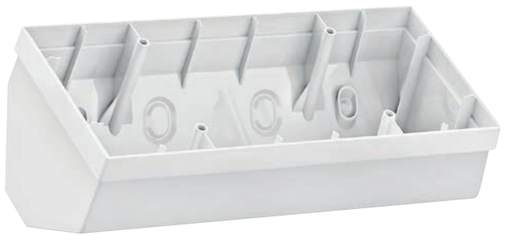

71417.x

Kutija nadgradna ugaona 7M

Wall mounted angle box 7M

- Kutija za ugradnju sedmorostruke prirubnice;
- Ugradnja na zid pomoću vijaka
- *Mounting box for seven gang mounting frame;*
- *Wall mounting with screws*

- KUĆIŠTA **IP55** za ugradnju modula iz programa EXPERIENCE.
- Poseduju zaštitu od:
  - taloženja prašine,
  - potpunu zaštitu od dodira,
  - zaštitu od prskanja vode u svim smerovima.

- *ENCLOSURES **IP55** for installation of EXPERIENCE modules.*
- *Enclosure has protection:*
  - *against dust,*
  - *complete touch protection*
  - *protection against spraying water in all directions*

	Bela *White*	**x = 0**
	Siva *Grey*	**x = 1**

experience

KUĆIŠTA IP55
ENCLOSURES IP55





71432.x

Kućište modula EXP za u zid **IP55** sa vijcima 2M

*Enclosure for modules EXP for into the wall **IP55** with screws 2M*

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja u zid u montažnu kutiju Ø60
- *Protection degree IP55*
- *Complied with IEC 60670-1*
- *Mounting into the wall in mounting box Ø60*



71442.x

Kućište modula EXP za u zid **IP55** sa stegačima 2M

*Enclosure for modules EXP for into the wall **IP55** with claws 2M*

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja u zid u montažnu kutiju Ø60
- *Protection degree IP55*
- *Complied with IEC 60670-1*
- *Mounting into the wall in mounting box Ø60*



71422.x

Kućište modula EXP za na zid **IP55** 2M

*Enclosure for modules EXP for onto the wall **IP55** 2M*

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja na zid pomoću vijaka prečnika do 4mm
- *Protection degree IP55*
- *Complied with IEC 60670-1*
- *Wall mounting by screws dia.up to 4mm*



71434.x

Kućište modula EXP za u zid **IP55** sa vijcima 4M

*Enclosure for modules EXP for into the wall **IP55** with screws 4M*

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja u zid u modularnu montažnu kutiju (4M)
- *Protection degree IP55*
- *Complied with IEC 60670-1*
- *Mounting into the wall in modular mounting box (4M)*



71424.x

Kućište modula EXP za na zid **IP55** 4M

*Enclosure for modules EXP for onto the wall **IP55** 4M*

- Stepen zaštite IP55
- Usaglašeno sa IEC 60670-1
- Ugradnja na zid pomoću vijaka prečnika do 4mm
- *Protection degree IP55*
- *Complied with IEC 60670-1*
- *Wall mounting by screws dia.up to 4mm*



experience

* Halogen free

MONTAŽNE KUTIJE ZA PUNI ZID
INSTALLATION BOXES FOR SOLID WALL



700

Montažna kutija
Ø60 x 40 mm
nizajuća za rastojanje
71mm

Installation box
Ø60 x 40 mm
for sequencing
71mm step

710

Montažna kutija
Ø60 x 60mm
nizajuća za rastojanje
71mm

Installation box
Ø60 x 60 mm
for sequencing
71mm step


800

Montažna kutija
Ø60 x 40mm
nizajuća za rastojanje
80mm

Installation box
Ø60 x 40 mm
for sequencing
80mm step

- Usaglašeno sa IEC 60570-1
- Ugradnja u zid,
- Mogućnost instalacije pomoću stegača ili vijaka
- *Compiled with IEC 60670-1*
- *Flush mounted,*
- *Accessory installation by clamps or screw*

650°C, 500V~



6523

Montažna kutija 3M
za puni zid,
50 mm

Installation box 3M
for solid wall,
50 mm

65236

Montažna kutija 3M
za puni zid,
65 mm

Installation box 3M
for solid wall,
65 mm

- Kutija za ugradnju trostruke prirubnice;
- Ugradnja u puni zid pod malter
- *Mounting box for three gang mounting frame;*
- *Installation into the solid wall*

650°C, 400V~



6524

Montažna kutija 4M
za puni zid, 50 mm

Installation box 4M
for solid wall,
50 mm


65246

Montažna kutija 4M
za puni zid, 65 mm

Installation box 4M
for solid wall,
65 mm

- Kutija za ugradnju četvorostruke prirubnice;
- Ugradnja u puni zid pod malter
- *Mounting box for four gang mounting frame;*
- *Installation into the solid wall*

650°C, 400V~

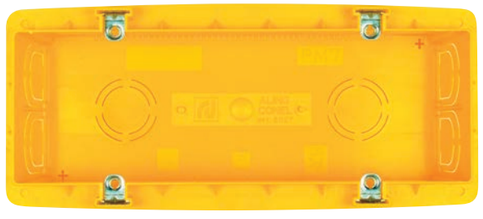

6527

Montažna kutija 6M/7M
za puni zid,
50 mm

Installation box
6M/7M for solid wall,
50 mm


65276

Montažna kutija 6M/7M
za puni zid,
65 mm

Installation box
6M/7M for solid wall,
65 mm

- Kutija za ugradnju sedmorostruke prirubnice;
- Ugradnja u puni zid pod malter
- *Mounting box for seven gang mounting frame;*
- *Installation into the solid wall*

650°C, 400V~

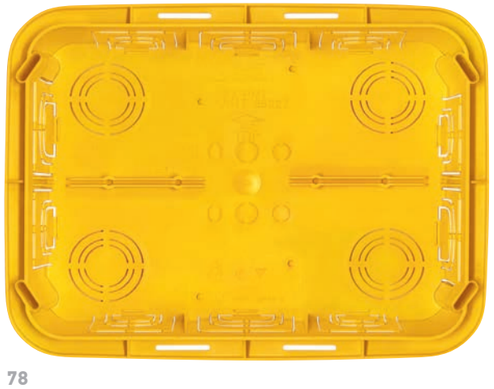

65227

Montažna kutija 2 x 7M
za puni zid,
50 mm

Installation box
2 x 7M for solid wall,
50 mm

- Kutija za ugradnju 2 x sedmorostruke prirubnice;
- Ugradnja u puni zid pod malter
- *Mounting box for 2 x seven gang mounting frame;*
- *Installation into the solid wall*

650°C, 400V~

* Halogen free

experience



MONTAŽNE KUTIJE ZA ŠUPLJI ZID
INSTALLATION BOXES FOR HOLLOW WALL




711

Montažna kutija
Ø60 x 40 mm
za šuplji zid

Installation box
Ø60 x 40 mm
for hollow wall

- Ugradnja u šuplji zid pomoću kandži sa vijcima
- *Installation into the hollow wall by screw clamps*

850°C, 400V~




6533

Montažna kutija 3M
za šuplji zid,
50 mm

Installation box 3M
for hollow wall,
50 mm

- Kutija za ugradnju trostruke prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- *Mounting box for three gang mounting frame;*
- *Installation into the hollow wall by screw clamps*

850°C, 400V~

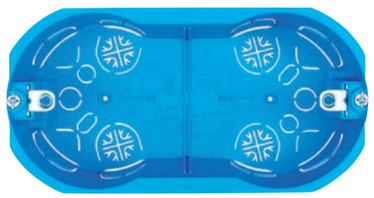


6534

Montažna kutija 4M
za šuplji zid,
50 mm

Installation box 4M
for hollow wall,
50 mm

- Kutija za ugradnju četvorostruke prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- *Mounting box for four gang mounting frame;*
- *Installation into the hollow wall by screw clamps*

850°C, 400V~

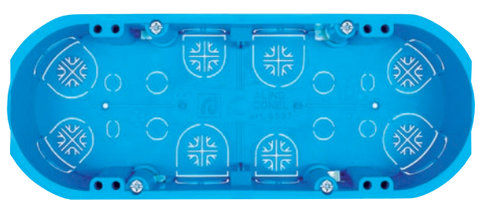


6537

Montažna kutija 6M/7M
za šuplji zid,
50 mm

Installation box 6M/7M
for hollow wall,
50 mm

- Kutija za ugradnju sedmorostruke prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- *Mounting box for seven gang mounting frame;*
- *Installation into the hollow wall by screw clamps*

850°C, 400V~

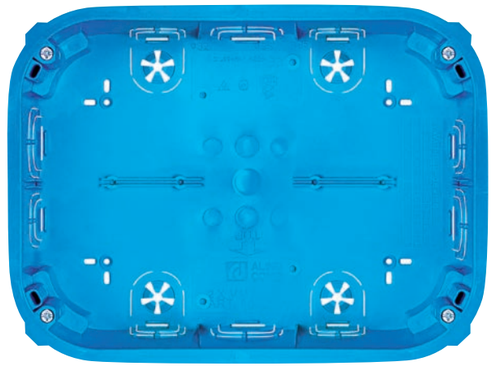

65327

Montažna kutija 2 x 7M
za šuplji zid,
50 mm

Installation box 2 x 7M
for hollow wall,
50 mm

- Kutija za ugradnju 2 x sedmorostruke prirubnice;
- Ugradnja u šuplji zid pomoću kandži sa vijcima
- *Mounting box for 2 x seven gang mounting frame;*
- *Installation into the hollow wall by screw clamps*

850°C, 400V~

OBLO LIVING

SISTEM KUĆNE AUTOMATIZACIJE
HOME AUTOMATION SYSTEM

OBLO living kombinuje kompletno softversko rešenje za kućnu automatizaciju sa interno razvijenim uređajima i partnerskim uređajima, sa ciljem da pokrije rasvetu, bezbednost, sigurnost, energetsku efikasnost i ostale aspekte tržišta kućne automatike.

OBLO living combines end-to-end software solution for home automation with inhouse developed home automation devices and devices from our partners to cover lighting, security, safety, energy management and other aspects of home automation market.

RASVETA
- Daljinski kontrolišete svetla
- Automatski upalite/ugasite svetla
- Podesite svetlo u skladu sa raspoloženjem
- Promenite boju svetla

LIGHTNING
- *Remotely control your lights*
- *Automatically turn on/off lights*
- *Set ambient light based on your mood*
- *Change the color of your lights*



BEZBEDNOST
- Nadgledajte dom pomoću IP kamere
- Detektujte vanredne situacije
- Budite obavešteni o nivou bezbednosti Vašeg doma
- Osigurajte se od provalnika

SAFETY
- *Monitor your home via IP camera*
- *Detect emergency situations*
- *Get notified about security flaws in your home*
- *Keep your home safe from potential burglars*



UŠTEDA
- Daljinski upravljajte sistemima za grejanje i hlađenje
- Pratite potrošnju električne energije
- Smanjite troškove kontrolišući dom na pametniji način
- Budite obavešteni o najvećim potrošačima u kući

ENERGY
- *Remotely control heating and cooling systems*
- *Monitor power consumption of home appliances*
- *Control your home in a smarter way to reduce energy bills*
- *Get notified about high energy consumption sources*



KOMFOR
- Kreirajte jutarnju scenu za savršen početak dana
- Kontrolišite uređaje dok sedite
- Pratite temperaturu, intenzitet svetlosti i vlažnost vazduha
- Proverite vremensku prognozu

COMFORT
- *Create your morning scene for the perfect start of the day*
- *Control devices without leaving your seat*
- *Monitor temperature, light intensity and humidity in your home*
- *Get outdoor weather information*





69400.00

OBLO
Smart Home
Kontroler

OBLO
Smart Home
Gateway

- Napajanje ~110 – 230VAC, 50-60Hz, potrošnja <5W
- Kompatibilan sa ZigBee i Z-Wave protokolima
- Podržava integraciju uređaja zasnovanih na IP tehnologiji
- Povezuje se na internet ruter preko WiFi ili Eternet kabla
- Ugrađeni zvučnik upozorava na vanredne situacije

- *Power supply ~110 – 230VAC, 50-60Hz, power consumption <5W*
- *Compliant with ZigBee and Z-Wave*
- *Supports integration of IP-based devices*
- *Connects to Internet router via WiFi or Ethernet cable*
- *Built-in buzzer alerts emergency situations*



6931.0

Pametna utičnica
16A 250V~

Smart Plug
16A 250V~

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje: do 3600W (16A)
- Merenje i praćenje potrošnje

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load: up to 3600W (16A)*
- *Control appliances, monitor power usage and save energy*



72231

Pametni dimer
EXP 200W, 1M

Smart dimmer
EXP 200W, 1M

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Vrsta opterećenja:
  - 2 žice– inkandenscentna, dimabilne LED i CFL
  - 3 žice – inkandenscentna, nedimabilne i dimabilne LED i CFL
- Minimalno opterećenje:
  - 2 žice – 30W inkandenscentna, 3W dimabilne LED i CFL
  - 3 žice – 0W
- Maksimalno opterećenje: do 200W

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Load type:*
  - *2 wire – incandescent, dimmable LED and dimmable CFL*
  - *3 wire - incandescent, non dimmable and dimmable LED and CFL*
- *Minimum load:*
  - *2 wire – 30W incandescent, 3W dimmable led and cfl*
  - *3 wire – 0w*
- *Maximum load: up to 200W*



72232

Pametna sklopka
EXP, 10A, 1M

Smart Outlet
(High Load Switch)
EXP 10A, 1M

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje: 10A
- Merenje i praćenje potrošnje

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load up to 10A*
- *Control appliances, monitor power usage and save energy*



72234

Kontroler scena,
2 tastera EXP, 1M

Scene Controller,
2 switch EXP, 1M

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Aktivira do 4 scene pomoću 2 tastera

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Associate up to 4 rules to 2 available buttons*



72236

Kontroler roletni
EXP, 1M

Shutter controller
EXP, 1M

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje: do 600W

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load: up to 600W*



72235.00

Baterijski kontroler scena
EXP, sa maskom 2M

Battery Scene Controller
EXP, with cover frame 2M

- Napajanje: Baterijsko, CR2450
- Tip komunikacije: ZigBee
- Aktivira do 8 scene pomoću 4 tastera

- *Power: Battery, CR2450*
- *Connectivity: ZigBee*
- *Associate up to 8 rules to 4 available buttons*



69501

RGBW dimer
za LED traku

RGBW
Dimmer

- Napajanje: 12-24VAC
- Tip komunikacije: ZigBee
- Maksimalno opterećenje: do 4A po kanalu

- *Power: 12-24VAC*
- *Connectivity: ZigBee*
- *Minimum load: Up to 4A per channel*



69500

Kontroler
roletni
za doznu

Flush
Shutter

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje: do 300W

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load: up to 300W*



69502

Pametna
sklopka
za doznu

Flush
Relay

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje: do 2200W (10A)

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load: up to 2200W (10A)*



69503

Pametni dimer
0-10V

Flush Dimmer
0-10V

- Napajanje: 12VAC
- Tip komunikacije: ZigBee

- *Power: 12VAC*
- *Connectivity: ZigBee*



69511

Pametni dimer
za doznu

Flush
dimmer

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Maksimalno opterećenje: do 150W

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Minimum load: up to 150W*



69516

ON/OFF
termostat
za doznu

Flush
ON/OFF
Thermostat

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Izlaz: relejni, opterećenja do 2200W (10A)

- *Power: 230VAC, 50HZ*
- *Connectivity: ZigBee*
- *Output: Relay, up to 2200W (10A)*



69512

Baterijski
sobni termostat

Room temperature controller - battery

- Napajanje: baterijsko (2x AA 1.5V)
- Tip komunikacije: ZigBee
- Izlaz: relejni, opterećenja do 2200W (10A)

- *Power: Battery (2X AA)*
- *Connectivity: ZigBee*
- *Output: Relay, up to 2200W (10A)*



69513

Sobni
termostat

Room temperature controller

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: Z-Wave
- Izlaz: relejni, opterećenja do 2200W (10A)

- *Power: 230VAC, 50Hz*
- *Connectivity: Z-Wave*
- *Output: Relay, up to 2200W (10A)*



69519

Fan coil termostat
za dvocevni
sistem

Fan coil temp. controller for two-pipe systems

69520

Fan coil termostat
za četvorocevni
sistem

Fan coil temp. controller for four-pipe systems

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: Z-Wave
- Izlaz: relejni, opterećenja do 2200W (10A)

- *Power: 230VAC, 50Hz*
- *Connectivity: Z-Wave*
- *Output: Relay, up to 2200W (10A)*




69509

Termostat
za radijator

Radiator thermostat

- Napajanje: baterijsko (2x AA 1.5V)
- Tip komunikacije: ZigBee
- Izlaz: relejni, opterećenja do 2200W (10A)

- *Power: Battery (2X AA)*
- *Connectivity: ZigBee*
- *Output: Relay, up to 2200W (10A)*



69504

AC Kontroler PRO

AC Controller PRO

- Napajanje: 5VDC
- Tip komunikacije: Z-Wave
- Kontrola klima uredjaja

- *Power: 5VDC*
- *Connectivity: Z-Wave*
- *Air condition controller*



69510

IR univerzalni
daljinski upravljač

IR universal remote control

- Napajanje: 5VDC
- Tip komunikacije: Z-Wave
- Emulator IR protokola

- *Power: 5VDC*
- *Connectivity: Z-Wave*
- *IR Emulator*



69508

Sirena

Siren

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: Z-Wave
- Zvučni alarm, 105dB

- *Power: 230VAC, 50Hz*
- *Connectivity: Z-Wave*
- *Sound alarm, 105dB*



69600

CO senzor

CO sensor

- Napajanje: baterijsko (CR123)
- Tip komunikacije: ZigBee
- Zvučni alarm, 85dB

- *Power: Battery (CR123)*
- *Connectivity: ZigBee*
- *Sound alarm, 85dB*



69601

Detektor
dima

Smoke sensor

- Napajanje: baterijsko (CR123)
- Tip komunikacije: ZigBee
- Zvučni alarm, 85dB

- *Power: Battery (CR123)*
- *Connectivity: ZigBee*
- *Sound alarm, 85dB*



69602

Detektor
vode

Flood sensor

- Napajanje: baterijsko (CR123)
- Tip komunikacije: ZigBee
- Zvučni alarm, 85dB

- *Power: Battery (CR123)*
- *Connectivity: ZigBee*
- *Sound alarm, 85dB*



69608

Detektor
gasa

Gas detector

- Napajanje: 230VAC, 50Hz
- Tip komunikacije: ZigBee
- Zvučni alarm, 85dB

- *Power: 230VAC, 50Hz*
- *Connectivity: ZigBee*
- *Sound alarm, 85dB*



69603

Detektor
pokreta

Motion sensor

- Napajanje: baterijsko (CR123)
- Tip komunikacije: ZigBee

- *Power: Battery (CR123)*
- *Connectivity: ZigBee*



69609

Senzor
za vrata/prozore

Door/Window sensor

- Napajanje: baterijsko (CR2450)
- Tip komunikacije: ZigBee

- *Power: Battery (CR2450)*
- *Connectivity: ZigBee*



69604

Multisenzor
3 u 1

Multisensor 3 in 1

- Napajanje: baterijsko (CR123)
- Tip komunikacije: ZigBee
- Detekcija pokreta, temperature i osvetljaja

- *Power: Battery (CR123)*
- *Connectivity: ZigBee*
- *Motion sensor, themperature, lux meter*



experience antibacterial

ANTIBAKTERIJSKI PROGRAM
ANTIBACTERIAL PROGRAM

A73101.0

Taster EXP 1M

Button EXP 1M

- Taster 1M širine 22,2mm,
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem

- *Button 1M width 22,2mm,*
- *For switches without indication;*
- *Installation onto the switch by pressing*




A73201.0

Taster sa indikacijom EXP 1M

Button with indicator EXP 1M

- Taster 1M širine 22,2mm,
- Za sklopke sa indikacijom
- Ugradnja na sklopku utiskivanjem

- *Button 1M width 22,2mm,*
- *For switches without indication;*
- *Installation onto the switch by pressing*



A73301.0

Taster EXP 2M

Button EXP 2M

- Taster 2M širine 44,4mm,
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem

- *Button 2M width 44,4mm,*
- *For switches without indication;*
- *Installation onto the switch by pressing*



A73401.0

Taster sa indikacijom EXP 2M

Button with indicator EXP 2M

- Taster 2M širine 44,4mm,
- Za sklopke bez indikacije;
- Ugradnja na sklopku utiskivanjem

- *Button 2M width 44,4mm,*
- *For switches with indication*
- *Installation onto the switch by pressing*



A70001.0

Poklopac maske (slepi modul) EXP 1M

Blank module EXP 1M

- Za pokrivanje slepih modula širine 22,2mm
- Ugradnja u noseću prirubnicu utiskivanjem

- *For blank module covering 22,2mm width;*
- *Installation into the mounting frame by pressing*



A74201.0

Keystone nosač EXP 1M

Keystone holder EXP 1M

- Modul širine 22,2mm za nošenje Keystone konektora
- Ugradnja u noseću prirubnicu utiskivanjem

- *Module 22,2mm width for Keystone connectors holding*
- *Installation into the mounting frame by pressing*

ČUVAR VAŠEG ZDRAVLJA

- Antibakterijski program izrađen u standardnom ALING EXPERIENCE dizajnu i isključivo u beloj boji ima funkciju zaštite korisnika od prenošenja bakterija, virusa, mikroba i gljivica čestim dodirivanjem. Dnevno više korisnika dodiruje tastere sklopki, maske i blokove priključnica. Ovo je naročito izraženo u javnim i zdravstvenim ustanovama tako da je prednja površina idealno mesto za razvoj i širenje bakterija.
- Specijalni aditivi na bazi srebrnih jona koji se dodaju u plastične mase tokom vremena uništavaju i sprečavaju dalje širenje bakterija na površini plastike. Zahvaljujući ovim karakteristikama srebra postiže se veoma efikasna i dugotrajna zaštita zdravlja svih korisnika koji dolaze u dodir sa sklopkama, maskama i priključnicama.
- Prvenstveno je značajna primena u svim prostorima gde se zahteva visok stepen higijene kao što su bolnice i druge zdravstvene ustanove, restorani, autobuske i železničke stanice, aerodromi, školske ustanove, stanovi sa bolesnim osobama osetljivim na bakterije i viruse, stanovi zdravstvenih radnika, trgovinski i poslovni centri, javne ustanove (sudovi, opštine, muzeji, bioskopi, sportski objekti i sl.).
- Proizvodi su testirani u skladu sa standardom JIS Z 2801 i poseduju visok stepen redukcije bakterija na površini plastike.
- Održavanje i čišćenje se sprovodi isto kao i kod proizvoda koji nemaju antibakterijsku zaštitu.
- Proizvodi su identični kao i standardni program sa dodatom oznakom A ispred oznake proizvoda.
- Sve maske antibakterijskog programa označene su znakom raspoznavanja

antibacterial

YOUR HEALTH GUARDIAN

- *Antibacterial program made in standard ALING MODE design and exclusively in white color has a function to protect user from transmision of bacterial, viruses, microbes and fungi during the often touching. During the day more users touches the switch buttons, covering frames and socket blocks. It is especially expressed in the public and medical institutions, so that the front surface is perfect place for growth and spread of bacteria.*
- *The special additives on silver ions that were added to plastic compounds damage and block bacteria spread on the plastic surface. With the help of this silver characteristic there is very efective and long term protection of health for all users which are in contact with switches, covering frames and sockets.*
- *At the first time aplication is important at the places where a high level of hygiene is required like hospitals and other medical institutions, restaurants, bus and train stations, airports, schools, apartments with the sick persons which are sensitive on bacteria and viruses, medical employees apartments, shoping and buisness centers, public institutions (courthouses, townships, museums, cinemas, sport arenes).*
- *The products are tested according the standard JIS Z 2801 and they have a high level of bacteria reduction on plastic surface.*
- *Cleaning and maintenance is same like products without antibacterial protection.*
- *Prodacts are identical with standard program with additional mark A ahead of product mark.*
- *All covering frames are marked with sign of recognition*



A74102.0

Priključnica dvopolna sa zaštitom kontakata 16A 250V~ EXP 2M

2 pole socket outlet with safety shutter 16A 250V~ EXP 2M

- Usaglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60884-1*
- *Installation into the mounting frame by pressing*



A74104.0T

Priključnica dvopolna sa transparentnim poklopcem i zaštitom kontakata 16A 250V~ EXP 2M

2 pole socket outlet with transparent cover and safety shutter 16A 250V~ EXP 2M

- Usaglašeno sa IEC 60884-1
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 60884-1*
- *Installation into the mounting frame by pressing*



A72121.0

Priključnica dvopolna 10A 250V~ EXP1M, CEI 23-50/P11 italijanska

2 pole socket outlet CEI 10A 250V~ EXP 1M

- Usaglašeno sa CEI 23-50/P11;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with CEI 23-50/P11;*
- *Installation into the mounting frame by pressing*




A74263.0

Priključnica antenska TV IEC završna 5dB EXP 1M

TV aerial socket end-line 5db IEC EXP 1M

- Usaglašeno sa IEC 169-2 - muški konektor;
- Montaža antenskog kabla preko vijčane veze;
- Prigušenje signala cca 5dB;
- Ugradnja u noseću prirubnicu utiskivanjem

- *Complied with IEC 169-2 - M connector;*
- *Installation of aerial cable by screw terminals;*
- *Signal attenuation approx. 5dB;*
- *Installation into the mounting frame by pressing*



A70102.0

Maska
2M EXP,
ANTIBACTERIAL,
bela

Cover frame
2M EXP,
ANTIBACTERIAL,
white


antibacterial

- Za pokrivanje sklopa sa dva modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with two modules;*
- *Installation onto the mounting frame by pressing*



97,6 x 91,8 mm

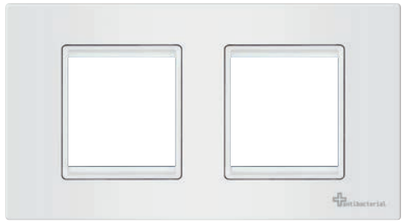

A70122.0

Maska 2x2M EXP,
ANTIBACTERIAL,
horizontalna, bela


Cover frame
2x2M, EXP,
ANTIBACTERIAL,
horizontal, white

- Za pokrivanje dva sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the two assemblies with two modules in horizontal mounted box Ø60;*
- *Installation onto the mounting frame by pressing*



168,6 x 91,8 mm

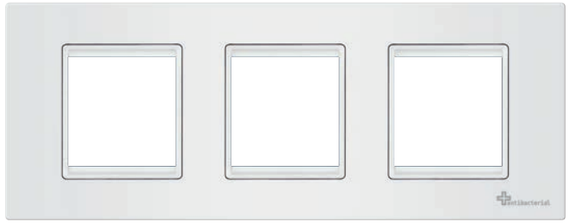


A70132.0

Maska 3x2M EXP,
ANTIBACTERIAL,
horizontalna, bela

Cover frame
3x2M, EXP,
ANTIBACTERIAL,
horizontal, white

- Za pokrivanje tri sklopa sa dva modula u horizontalnim nizajućim kutijama Ø60;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the three assemblies with two modules in horizontal mounted box Ø60;*
- *Installation onto the mounting frame by pressing*



239,6 x 91,8 mm



A70103.0

Maska
3M EXP,
ANTIBACTERIAL,
bela

Cover frame
3M EXP,
ANTIBACTERIAL,
white

- Za pokrivanje sklopa sa tri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with three modules;*
- *Installation onto the mounting frame by pressing*



120 x 91,8 mm



A70104.0

Maska
4M EXP,
ANTIBACTERIAL,
bela


Cover frame
4M EXP,
ANTIBACTERIAL,
white

- Za pokrivanje sklopa sa četiri modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with four modules;*
- *Installation onto the mounting frame by pressing*



142,4 x 91,8 mm

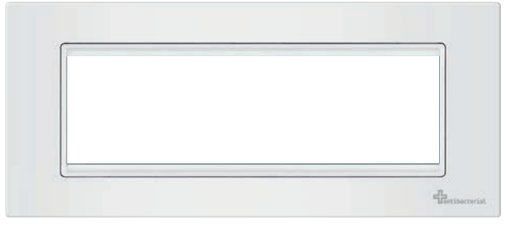


A70107.0

Maska
7M EXP,
ANTIBACTERIAL,
bela

Cover frame
7M EXP,
ANTIBACTERIAL,
white

- Za pokrivanje sklopa sa sedam modula;
- Ugradnja na noseću prirubnicu utiskivanjem

- *For covering the assembly with seven modules;*
- *Installation onto the mounting frame by pressing*




209,6 x 91,8 mm

eXperience




ŠEME VEZIVANJA
WIRING DIAGRAMS

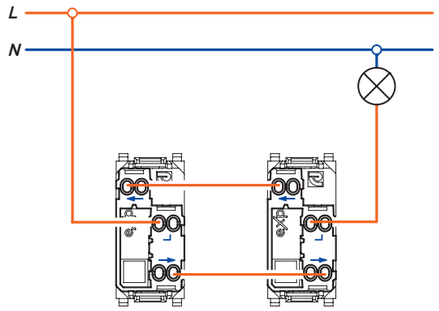

72103

Sklopka naizmenična


2 way switch

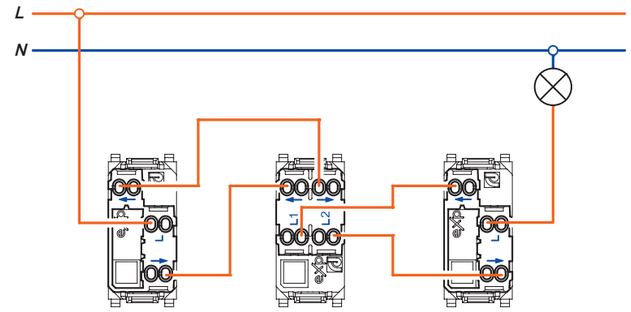

72104

Sklopka ukrsna u kombinaciji sa dve sklopke naizmenične


Intermediate switch in combination with two 2 way switches




72105

Sklopka jednopolna sa priključkom za nulti provodnik (indikatorska)

1 way switch with connection for the neutral conductor (with indikator)

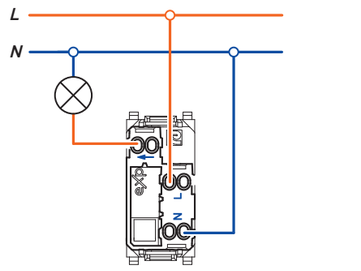

72107



72101


Sklopka jednopolna

1 way switch

72111

Taster sklopka jednopolna


Push-button switch



72106

Sklopka dvopolna

2 pole switch

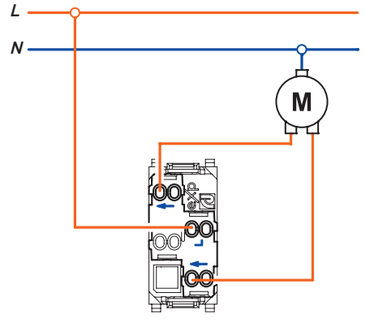

72108


Sklopka za roletne

Shutters switch

72118

Taster sklopka za roletne


Push-button shutters switch

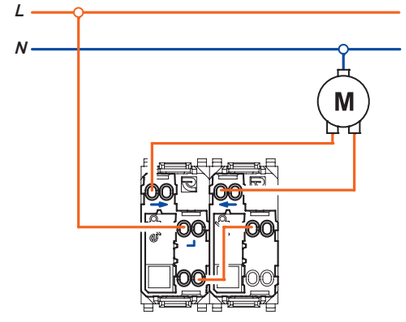

72114

Taster sklopka za roletne


Push-button shutters switch



72201

Elektronski
regulator


*Dimmer
rotative*



72202


Elektronski regulator
sa naizmeničnom sklopkom

*Dimmer
with alternative switch*

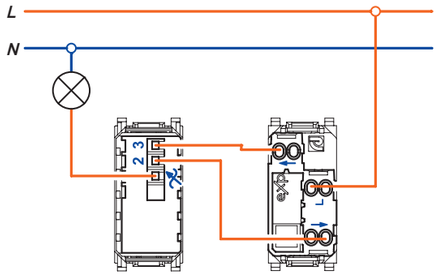

Elektronski regulator sa naizmeničnom sklopkom,
povezivanje u naizmeničnom režimu rada


*Dimmer with alternative switch,
wired in alternating mode*



72204


Elektronski regulator
za induktivno opterećenje

*Dimmer
for inductive load*

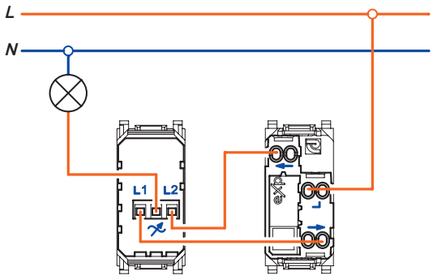

Elektronski regulator za induktivno opterećenje,
povezivanje u naizmeničnom režimu rada


*Dimmer inductive load,
wired in alternating mode*



72206

Regulator 800W povezuje
se kao jednopolna sklopka.


*Dimmer 800W is wired
as a single-pole switch.*



72205


Elektronski regulator za LED

Dimmer for LED



Elektronski regulator za LED
u režimu rada sa nultim provodnikom

*Dimmer for LED
with neutral conductor mode*

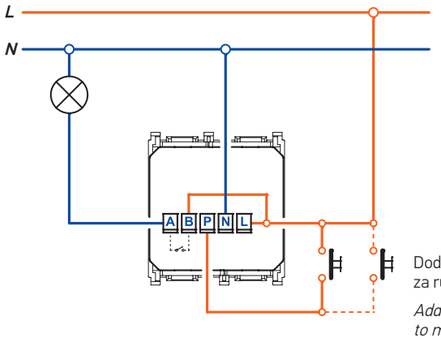


Dodatni tasteri
za ručno aktiviranje

*Additional buttons
to manually activate*

72203

Infracrveni detektor pokreta

Infrared motion detector




74283


Priključnica USB punjač


Power supply unit USB


experience


TEHNIČKI CRTEŽI
TECHNICAL DRAWINGS

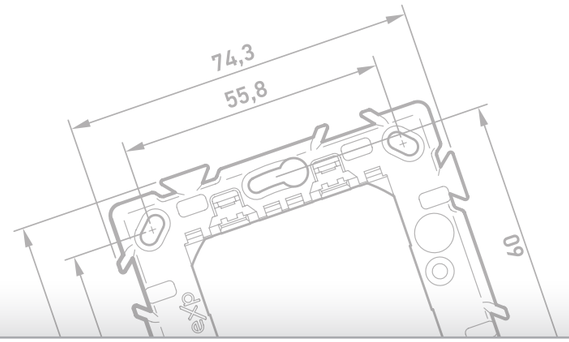








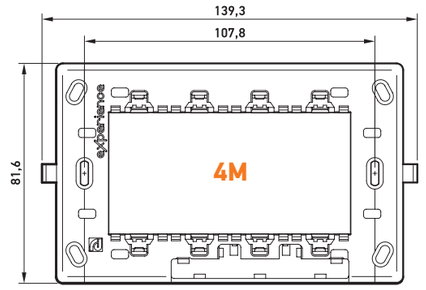


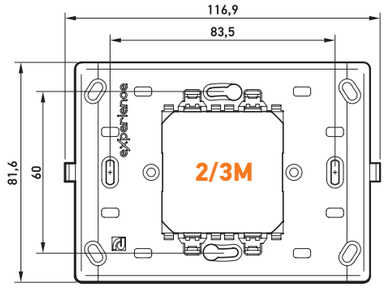


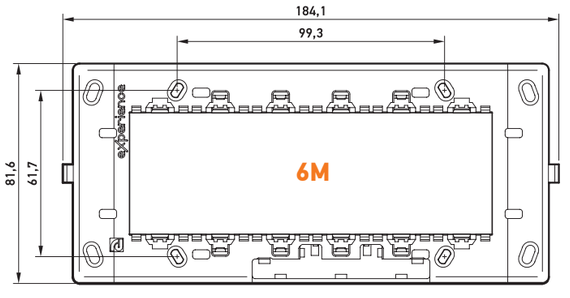


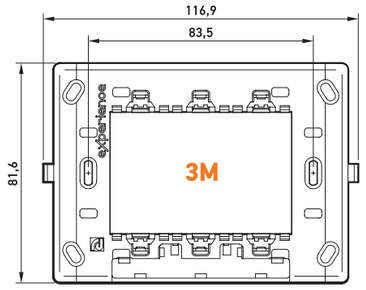


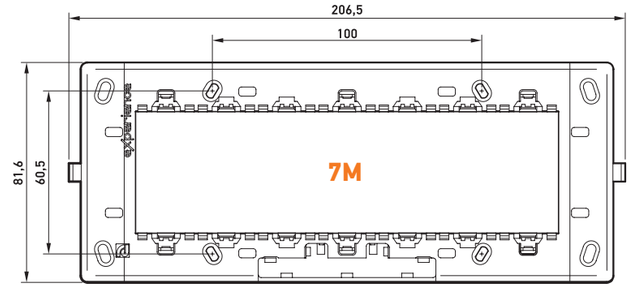


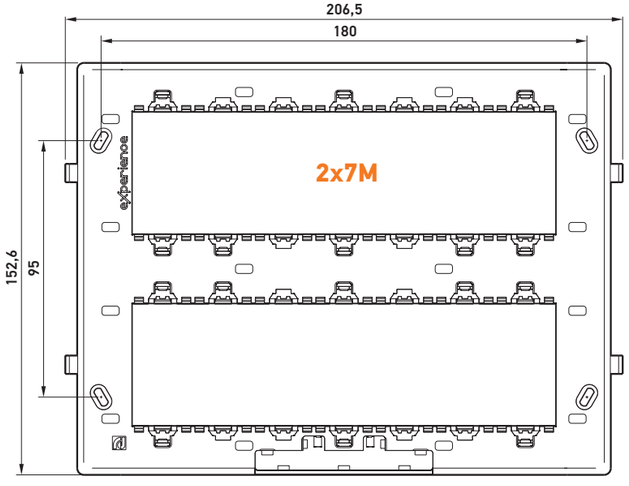




97,6
91,8
1M



97,6
91,8
2M



120
91,8
2/3M



120
91,8
3M

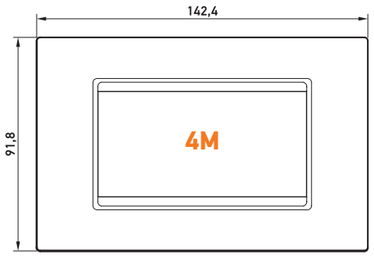

142,4
91,8
4M

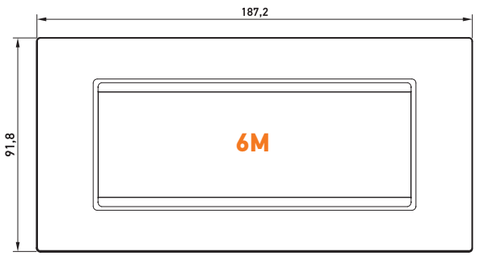

187,2
91,8
6M

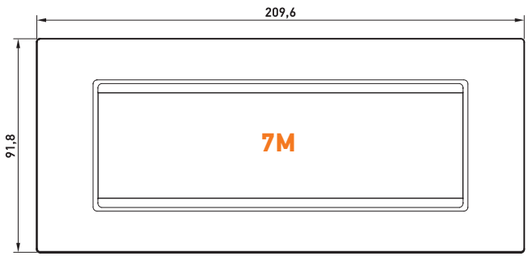

209,6
91,8
7M

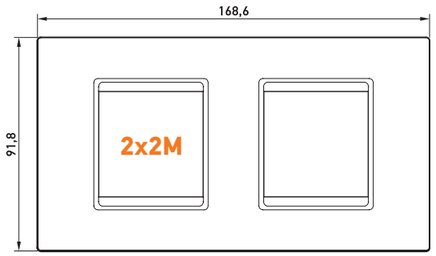
168,6
91,8
2x2M

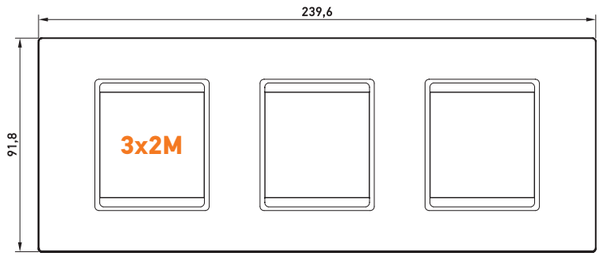

239,6
91,8
3x2M

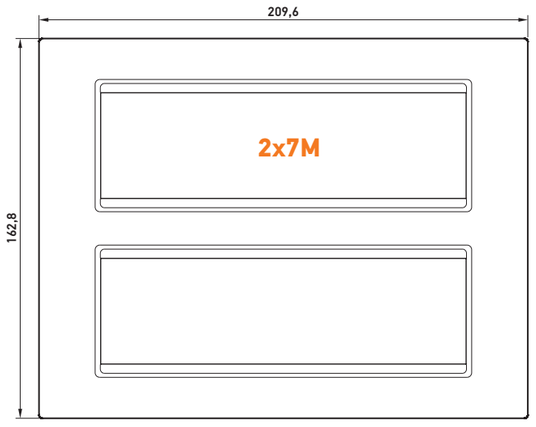

209,6
162,8
2x7M

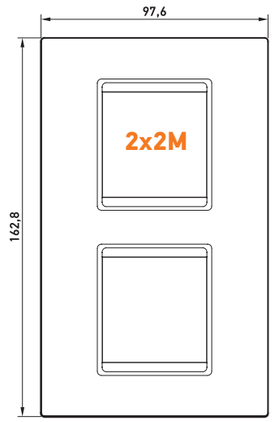

97,6
162,8
2x2M

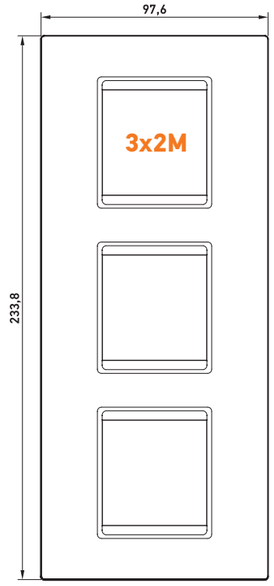

97,6
233,8
3x2M


Frame


95,6
86
1M


95,6
86
2M


118
86
3M

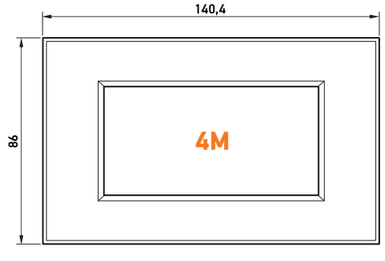
140,4
86
4M

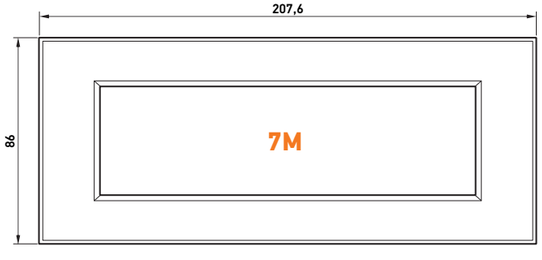
207,6
86
7M

eXperience

SADRŽAJ KATALOGA
THE CATALOG CONTENT

14 SKLOPKE
SWITCHES

15 LED INDIKATORSKA SVETLA
LED INDICATION LAMPS

16 TASTERI
SWITCH BUTTONS

17 TASTERI SA UGRAVIRANIM SIMBOLIMA
SWITCH BUTTONS ENGRAVED WITH THE SYMBOLS

18 SKLOPKE ZA ROLETNE
SWITCHES FOR SHUTTERS

19 ELEKTRONIKA
ELECTRONICS

20 SKLOPKE ZA KUPATILO
BATHROOM SWITCHES

21 UNIVERZALNI INDIKATOR
UNIVERSAL BATHROOM SET

22 PRIKLJUČNICE
SOCKET OUTLETS

24 KOMUNIKACIJE
COMMUNICATIONS

28 DEKORATIVNE **FRAME** MASKE
*DECORATIVE **FRAME** MASKS*

32 DEKORATIVNE MASKE
DECORATIVE FRAMES

34 **BASIC**
BELA / WHITE

42 **BASIC**
CRNA / BLACK

50 **BASIC**
SILVER / SILVER

58 **COLOR**
VIVID

60 **COLOR**
METALIC

62 **COLOR**
SOFT TOUCH

64 **EXCLUSIVE**
WOOD

66 **EXCLUSIVE**
GLASS

68 **EXCLUSIVE**
METAL

70 UGRADNJA
INSTALLATION

72 PRIRUBNICE
MOUNTING FRAMES

74 PRIRUBNICE SA LED OSVETLJENJEM
MOUNTING FRAMES WITH LED LIGHTNING

75 MONTAŽNI PRIBOR
INSTALLATION ACCESSORIES

76 NADGRADNE KUTIJE ZA NA ZID
WALL MOUNTED BOXES

77 KUĆIŠTA IP55
ENCLOSURES IP55

78 MONTAŽNE KUTIJE ZA PUNI ZID
INSTALLATION BOXES FOR SOLID WALL

79 MONTAŽNE KUTIJE ZA ŠUPLJI ZID
INSTALLATION BOXES FOR HOLLOW WALL

80 OBLO LIVING SISTEM KUĆNE AUTOMATIZACIJE
OBLO LIVING HOME AUTOMATION SYSTEM

86 ANTIBAKTERIJSKI PROGRAM
ANTIBACTERIAL PROGRAM

89 ŠEME VEZIVANJA
WIRING DIAGRAMS

91 TEHNIČKI CRTEŽI
TECHNICAL DRAWINGS



ALING-CONEL





ALING-CONEL

a: Železnička 10, 21432 Gajdobra, Serbia

t: +381 21 762 674, 762 586

f: +381 21 762 779

e: sales@aling-conel.com

www.aling-conel.com

Realizacija: »Repro-Print« 021 504 709